

OFFSHORE STANDARD DNV-OS-D101

MARINE AND MACHINERY SYSTEMS AND EQUIPMENT

OCTOBER 2008

This booklet has since the main revision (October 2008) been amended, most recently in October 2009. See the reference to "Amendments and Corrections" on the next page.

FOREWORD

DET NORSKE VERITAS (DNV) is an autonomous and independent foundation with the objectives of safeguarding life, property and the environment, at sea and onshore. DNV undertakes classification, certification, and other verification and consultancy services relating to quality of ships, offshore units and installations, and onshore industries worldwide, and carries out research in relation to these functions.

DNV Offshore Codes consist of a three level hierarchy of documents:

- Offshore Service Specifications. Provide principles and procedures of DNV classification, certification, verification and consultancy services.
- Offshore Standards. Provide technical provisions and acceptance criteria for general use by the offshore industry as well as the technical basis for DNV offshore services.
- Recommended Practices. Provide proven technology and sound engineering practice as well as guidance for the higher level Offshore Service Specifications and Offshore Standards.

DNV Offshore Codes are offered within the following areas:

- A) Qualification, Quality and Safety Methodology
- B) Materials Technology
- C) Structures
- D) Systems
- E) Special Facilities
- F) Pipelines and Risers
- G) Asset Operation
- H) Marine Operations
- Wind Turbines
- O) Subsea Systems

Amendments and Corrections

Whenever amendments and corrections to the document are necessary, the electronic file will be updated and a new Adobe PDF file will be generated and made available from the Webshop (http://webshop.dnv.com/global/).

Comments may be sent by e-mail to rules@dnv.com For subscription orders or information about subscription terms, please use <code>distribution@dnv.com</code> Comprehensive information about DNV services, research and publications can be found at http://www.dnv.com, or can be obtained from DNV,

© Det Norske Veritas. All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, including photocopying and recording, without the prior written consent of Det Norske Veritas.

Computer Typesetting (Adobe FrameMaker) by Det Norske Veritas.

Veritasveien 1, NO-1322 Høvik, Norway; Tel +47 67 57 99 00, Fax +47 67 57 99 11.

If any person suffers loss or damage which is proved to have been caused by any negligent act or omission of Det Norske Veritas, then Det Norske Veritas shall pay compensation to such person for his proved direct loss or damage. However, the compensation shall not exceed an amount equal to ten times the fee charged for the service in question, provided that the maximum compensation shall never exceed USD 2 million.

In this provision "Det Norske Veritas" shall mean the Foundation Det Norske Veritas as well as all its subsidiaries, directors, officers, employees, agents and any other acting on behalf of Det Norske Veritas.

CHANGES

General

Being class related, this document is published electronically only (as of October 2008) and a printed version is no longer available. The update scheme for this category of documents is different compared to the one relevant for other offshore documents (for which printed versions are available).

For an overview of all types of DNV offshore documents and their update status, see the "Amendments and Corrections" document located at: http://webshop.dnv.com/global/, under category "Offshore Codes".

CONTENTS

CH. 1	GENERAL	. 9		500	Wall thickness of heavy high pressure pipes	.30
Sec. 1	Introduction	11	C	600 700	Piping flexibility and supportPlastic pipes	
Sec. 1	IIIII oduction	11		800	Sizing criteria for liquid lines	.31
A. Ger	neral	11				
A 100	Introduction	11			ps	.31
A 200	Application	11		100	General	
				200	Hydrostatic tests	
	mative References		D	300	Capacity tests	. 32
B 100			Б	Volv	/es	22
B 200	Reference documents	11		100	Valve design	
C Info	ammativa Dafaranaaa	12		200	Operation of valves	32
C. Inic	ormative References			300	Hydrostatic tests	32
C 100	General	12	L	500	Try drostatic tests	32
D Def	initions	12	F.	Flex	ible Hoses	.32
D 100			F	100	General	. 32
D 200			F	200	Installation	.32
			_			
E. Abl	previations and Symbols	13			chable Pipe Connections	.32
E 100		13		100	Flange connections	.32
E 200	Symbols	13		200	Pipe couplings	33
			G	300	Expansion joints and bellows	34
	cumentation		Н	Soci	set Welded Joints and Slip-on Sleeve Welded Joints	34
F 100	General	13		100	General	
CII A	TECHNICAL PROVISIONS	. ~	11	100	General	דכ
CH. 2	TECHNICAL PROVISIONS	15	Se	c. 3	Platform Piping Systems	35
Sec. 1	Design Principles	17				
566. 1	Design Timelples	1 /			eral	
A Arr	angement	17		100	Scope	
A 100		17	Α	200	Location of piping and control systems	.35
A 200		17	-	D 11		~ -
A 300					ast, Bilge and Drainage Systems General	.35
A 400		17		100	Basic requirements	. 35
A 500	Fire protection	17		200	Ballast systems	. 35
A 600	1			300	Drainage of dry compartments below main deck	. 35
A 700		18		400	Drainage of dry compartments above main deck	.35
A 800		10		500	Pumping and piping arrangement	.35
A 800	installations	1 2		600	Bilge pipes	.36
A 900				700	Bilge pumps	36
A 100		1)	В	800	Bilge wells, mud boxes, valves etc	36
11 100	calculations	19	C	Rall	ast and Bilge Systems for Column-stabilised Units and	
	VALUE AND CONTROL OF THE CONTROL OF	• /	С.		allations	
B. Cor	struction and Function	19	C	100	General	
B 100				200	Remote control and monitoring	
B 200	Environmental conditions	19		300	Ballast system	
B 300	Functional capability and redundancy(floating units)	20		400	Bilge system.	37
B 400	Failure effects	20	_		• •	5,
B 500	Component design	20	D.	Ball	ast and Bilge Systems for Self-elevating Units and	
~ ~				Insta	ıllations	.37
	sonnel Protection		D	100	General	
C 100	General	21	D	200	Pre-load system	.37
G 2	Consul District Desire		D	300	Bilge system	.37
Sec. 2	General Piping Design	22	_	D 11		
A Gar	neral	22	E.		ast and Bilge Systems for Ship-shaped Units and	~ -
A 100			-		ıllations	
A 200		22	E	100	General	.37
A 200	Categories of piping classification	<i>_</i>	E	A :	Overflow and Sounding Dines	20
B. Mar	terials	22	г. F	100	Overflow and Sounding Pipes	
B 100			F	200	Arrangement of air pipes	
B 200		23		300	Overflow pipes, arrangement	
B 300		23		400	Overflow pipes, sectional area	
B 400			F	500	Sounding arrangements	
B 500	Plastic pipes			600	Sounding pipes, sectional area	
B 600			1	000	Sounding pipes, sectional area	39
B 700		25	G	Stor	age and Transfer Systems for Liquids with Flashpoint	
B 800			J.	belo	w 60°C (e.g. Helicopter Fuel)	30
_ 500			G	100	General	
C. Des	ign Conditions	26		200	Arrangement	
C 100	•		J	200		رر
C 200			Se	c. 4	Machinery Piping System	41
C 300			50			• •
C 400			A	Gen	eral	41
	internal pressure	26		100	Redundancy and capacity	41
	*					

	Coolii 100	ng Systems General	41 41	B B	200 300	Boilers Atmospheric vessels.	
В	200	Sea inlets for cooling water pumps	41	В	400	Heat exchangers	.49
_				В	500	Pumps	.49
		cating Oil System	41	В	600	Compressors	.50
	100	General	41	В	700	Combustion engines	
_	200	Lubricating oil pre-treatment arrangement Lubricating oil supply	41	В		Gas turbinesShafting	
	300 400	Remote shut-off arrangement for lubricating oil tanks.	41 //1	В	900 1000		
C	400	Remote shut-off affangement for fuoricating off tanks.	41		1100	Couplings	
D	Fuel (Oil System	41		1200		50
	100	Flash point of fuel oil		Ъ	1200	Euorication and scaring	.50
	200	Fuel oil tanks	42	C.	Gene	ral Marine Equipment	.50
	300	Fuel oil piping			100	General	
	400	Arrangement of valves and fittings	42		200	Propulsion and auxiliary machinery	.50
	500	Remotely controlled shut-off arrangement for			300	Boilers, pressure vessels, thermal oil installations and	
		fuel oil tanks	42			incinerators	.51
D	600	Fuel oil pre-heaters		C	400	Anchoring and mooring equipment	.51
D	700	Fuel oil pre-treatment arrangement	42	C	500	Steering machinery	.51
D	800	Drip trays	42				
	900	Remote stop of fuel oil pumps and fans	42			ng Gear Machinery	.51
D	1000	Oil filters	43		100	Application	.51
D	1100	Various requirements	43		200	General	
_		1000			300	Arrangement	
		nal Oil Systems			400	Gearing	.52
Е	100	System arrangements	43		500	Pinion rack	
г	D. 13	Water and Candana C. C.	42	D		Gear casings and bearing structure	.52
		Water and Condensation Systems	43		700	Shafts and connections	.52
	100	Feed water pumps and piping	43		800	Bearings	.52
	200	Feed water heating			900	Brakes.	.52
	300	Feed water tanks	43		1000		
F	400	Condensate from steam heating of tanks	43		1100		
_	~ .				1200	- r	
		ı Systems		D	1300		
_	100	Steam piping		D	1400	Testing on board	.52
	200	Shut-off valves					
G	300	Safety valves	43	E.	Turre	et Machinery	. 53
					100	General	
		aulic Systems		Е	200	Design	.53
	100	General					
Η	200	Hydraulic power supply	44	F.	Thrus	sters	
Η	300	Hydraulic cylinders		F	100	General	
Η	400	Accumulators	44	F	200	Arrangement and layout	.53
Η	500	Hydraulic equipment	44	F	300	Propulsion thrusters	.53
				F	400	Design and construction	.53
I.	Pneur	natic Power Supply	45	F	500	Shafting	.53
I	100	General	45	F	600	Gear transmission	.53
I	200	Pneumatic equipment	45	F	700	Propeller	.54
		• •		F	800	Azimuth steering gear	.54
J.	Pneur	natic Starting Arrangements	45	F	900	Control and monitoring	.54
J	100	General	45			-	
J	200	Capacity	45	G.	Wind	llasses, Winches and Chain Stoppers for Temporary at	nd
J	300	Redundancy	45		Limit	ted Use	. 54
J	400	Emergency generators	45	G	100	General	.54
_					200	General design	.54
K.	Heatii	ng, Ventilation and Air Conditioning (HVAC)	45	G	300	Capacity and system requirements	
	100	General			400	Chain stoppers	.55
	200	Accommodation and control stations			500	Strength and design load	.55
	300	Ventilation of machinery spaces	46		600	Steel wire ropes with fittings and anchorages	.56
	400	Ventilation of gas hazardous areas	46		700	Electrical installations	.56
K	500	Fans serving hazardous spaces	46		800	Plans and specifications.	.56
K	600	Ductwork	46	_		•	
	700	Refrigeration plant	46	Se	ec. 6	Pipe Fabrication, Workmanship, and Testing	57
						F , F, 8	
L.		f Gas and Crude Oil for Auxiliary Boilers and		A.	Gene	ral	
	Turbi	nes	46		100	Objectives	.57
	100	General		Α	200	Application	.57
	200	Arrangement of engine room	46			**	
	300	Supply lines for gas and crude oil	47	B.	Weld	ling	.57
	400	Arrangement of gas supply for boilers and turbines	48		100	General	
	500	Arrangement of crude oil supply for boilers	48		200	Welded connections of steel pipes	
	600	Construction of boilers and burners	48		300	Pre-heating of steel pipes	
	700	Gas operated combustion engines			400	Heat treatment after welding of steel pipes	
		•		В	500	Non-destructive testing	
Se	c. 5	Machinery and Mechanical Equipment	49			· ·	
		• • • • • • • • • • • • • • • • • • • •		C.	Brazi	ing of Copper and Copper Alloys	.58
A.	Gener	ral	49		100	General	.58
	100	Principles					
		1	-	D.	Pipe 1	Bending	.58
В.	Recog	gnised Codes and Standards	49		100	General	
	100	Unfired pressure vessels	49		200	Heat treatment after bending	.58
		*				5	

E.	Joinin	g of Plastic Pipes	59
	100	General	
Е	200	Installer certification	
Е	300	Installation	59
Е	400	Electrical conductivity	59
Е	500	Quality control	
Е	600	Pressure testing of plastic pipes	59
F.	Hydro	ostatic Tests of Piping	60
		Hydrostatic testing before assembly on board	
F	200	Hydrostatic testing after assembly on board	60
G.	Functi	ional Testing	60
		General	

CI	H. 3	CERTIFICATION AND CLASSIFICATION	61
Se	c. 1	Certification and Classification	63
A.	Gener	al	63
	100	General	
A	200	Certification and classification principles	63
A	300	Assumptions	
В.	Docur	nentation Requirements	.63
В		General	63
C.	Certif	ication of Materials and Components	.63
	100	General	
Ċ	200	Certificate types	
Ċ	300	Categorisation of equipment and components	
C	400	Certification requirements under DNV-OS-D101	
D.	Surve	y During Construction	.65
D	100	General	
D	200	Quality assurance and quality control	
D	300	Materials	65
D	400	Welding and welder qualification	65
D	500	Testing	
E.	Surve	y During Installation and Commissioning	.66
Ε	100	General	
Е	200	System and equipment checks	
Е	300	Functional testing.	66



OFFSHORE STANDARD DNV-OS-D101

MARINE AND MACHINERY SYSTEMS AND EQUIPMENT

CHAPTER 1

GENERAL

CON	CONTENTS			
Sec.	1	Introduction		11

SECTION 1 INTRODUCTION

A. General

A 100 Introduction

- 101 This offshore standard provides principles, technical requirements and guidance for design, manufacturing and installation of marine and machinery systems and equipment for mobile offshore units and floating offshore installations.
- 102 The requirements of this standard are in compliance with relevant parts of SOLAS Ch. II-1 and the IMO MODU Code.
- SOLAS references are as quoted in MODU Code 1989 and fulfil class requirements. Note that for compliance with flag state requirements, later amendments may be applicable.
- 103 The standard has been written for general world-wide application. Governmental regulations may include requirements in excess of the provisions by this standard depending on the size, type, location and intended service of the offshore unit or installation.
- 104 The objectives of this standard are to:
- provide an internationally acceptable standard of safety by defining minimum requirements for offshore marine and machinery systems
- serve as a contractual reference document between suppliers and purchasers
- serve as a guideline for designers, suppliers, purchasers and regulators
- specify procedures and requirements for units or installations subject to DNV certification and classification.

A 200 Application

- 201 The requirements of this standard are applicable for mobile offshore units and floating offshore installations of the ship-shaped, self-elevating and column-stabilised design types, but may also be applied to other types of floating constructions, as applicable.
- 202 The requirements in this standard apply to marine piping systems, machinery piping systems and marine machinery systems, which are defined as systems serving the marine systems on a offshore unit or installation and not primarily intended for operation in drilling or hydrocarbon production service or dedicated auxiliary systems. Interfaces between such systems and marine systems should be identified and a specification break defined.

Guidance note:

Piping and equipment for drilling and drilling related auxiliary systems are addressed in DNV-OS-E101.

Piping and equipment for hydrocarbon production and production related auxiliary systems are addressed in DNV-OS-E201.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

203 Piping and equipment in connection with hydrocarbon storage (including, product piping, inert gas system, gas freeing and venting system and crude oil washing system) are addressed in the Rules for Classification of Ships Pt.5 Ch.3. The additional requirements to class III piping in this standard shall be applied.

Guidance note:

Some systems used for typical tank ship applications, (e.g. cargo piping, ballast systems, firewater systems), need to be especially considered, for example with respect to fabrication quality and support arrangement, when evaluated for use on offshore installations in view of differing operational conditions and overall safety and maintenance philosophy.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

204 Piping and equipment in connection with LNG storage are addressed in DNV-OS-C503 "Concrete LNG Terminal Structure and Containment Systems", DNV-OS-C107 "Steel LNG Terminal Structure and Containment Systems" (under development - see Note:) for steel installations, and Rules for Classification of Ships Pt.5 Ch.5.

Note:

For information concerning the referenced document: DNV-OS-C107 "Steel LNG Terminal Structure and Containment Systems" (currently under development), cotact TNCNO725, DNV, Høvik, Norway.

- **205** Hydrocarbon loading/offloading systems are addressed in DNV-OS-E201.
- **206** The requirements of this standard may also be applied to equivalent areas of fixed offshore installations.

B. Normative References

B 100 General

- 101 The following standards include provisions which, through reference in the text constitute provisions of this offshore standard. The latest issue of the references shall be used unless otherwise agreed.
- 102 Other recognised standards may be used provided it can be demonstrated that these meet or exceed the requirements of the standards referenced below.
- 103 Any deviations, exceptions and modifications to the design codes and standards shall be documented and agreed between the supplier, purchaser and verifier, as applicable.

B 200 Reference documents

201 Applicable DNV publications are given in Table B1.

	Table B1 DNV Rules, Classification Notes, Offshore Standards and Recommended Practices		
Reference	Title		
DNV-OS-A101	Safety Principles and Arrangement		
DNV-OS-B101	Metallic Materials		
DNV-OS-C102	Structural Design of Offshore Ships		
DNV-OS-C103	Structural Design of Column Stabilised Units (LRFD method)		
DNV-OS-C301	Stability and Watertight Integrity		
DNV-OS-C401	Fabrication and Testing of Offshore Structures		
DNV-OS-E301	Position Mooring		
DNV-RP-A201	Plan Approval Documentation Types – Definitions		
	Rules for Classification of Ships		
Classification Note 41.2	Calculation of gear rating for marine transmissions		

202 Other reference documents are given in Table B2 and in Ch.2 Sec. 5 B.

Table B2 Normative references		
Reference	Title	
ICLL	International Convention on Load Lines, 1966	
IMO MODU Code 1989	Code for the Construction and Equipment of Mobile Offshore Drilling Units, 1989	
ISO 281	Rolling bearings - Dynamic load ratings and rating life	
ISO 898	Mechanical Properties of Fasteners	

ISO 8861	Engine-room ventilation in diesel-engined ships
SOLAS	1974 SOLAS International Convention for the Safety of Life at Sea
EN 288-3	Specification and Approval of Welding Procedures for Metallic Materials - Part 3: Welding Procedure Tests for the Arc Welding of Steels
ISO 5817	Arc-welded joints in steel - Guidance on quality levels for imperfections

C. Informative References

C 100 General

101 Informative references are not considered mandatory in the application of the offshore standard, but may be applied or used for background information.

102 Informative references are given in Table C1.

Table C1 Informative references		
No.	Title	
ASME B31.3	Chemical Plant and Petroleum Refinery Piping	
ASTM D3806	Standard Test Method of Small-Scale Evaluation of Fire-Retardant Paints (2-Foot Tunnel Method)	
DNV-OS-E101	Drilling Plant	
DNV-OS-E201	Hydrocarbon Production Plant	
DNV Standard for Certification No. 2.22	Lifting Appliances	
EN 12238	Ventilation for Buildings - Air Terminal Devices- Aerodynamic Testing and Rating for Mixed Flow Application	
EN 12239	Fire Protection Equipment - Self Contained Smoke Alarms	
ENV 12097	Ventilation for buildings - Ductwork - Requirements for ductwork components to facilitate maintenance of ductwork systems	
IMO Resolution A.653(16)	Recommendation on Improved Fire Test Procedures for Surface Flammability of Bulkhead, Ceiling and Deck Finish Materials	
IMO Resolution A.753(18)	Guidelines for the Application of Plastic Pipes on Ships	
ISO 75	Plastics - Determination of temperature of deflection under load	
ISO 1127	Stainless steel tubes - Dimensions, tolerances and conventional masses per unit length	
ISO 1461	Hot dip galvanized coatings on fabricated iron and steel articles - Specifications and test methods	
ISO 8861	Shipbuilding - Engine-room ventilation in diesel-engined ships - Design requirements and basis of calculations	
UKOOA	Specification and Recommended Practice for use of GRP piping offshore	
USCG PFM 1-98	Policy File Memorandum on the Fire Performance Requirements for Plastic Pipe per IMO Resolution A.753(18).	

D. Definitions

D 100 Verbal forms

101 Shall: Indicates requirements strictly to be followed in order to conform to this standard and from which no deviation is permitted.

102 Should: Indicates that among several possibilities one is recommended as particularly suitable, without mentioning or

excluding others, or that a certain course of action is preferred but not necessarily required. Other possibilities may be applied subject to agreement.

103 *May:* Verbal form used to indicate a course of action permissible within the limits of the standard.

D 200 Definitions

201 *Column-stabilised unit:* A unit with the main deck connected to the underwater hull or footings by columns.

202 Engine room: This is the space containing propulsion machinery and machinery for generation of electrical power. Rooms within or adjacent to the engine room with visual contact with the machinery are considered to be part of the engine room.

203 Floating offshore installation: A buoyant construction engaged in offshore operations including drilling, production, storage or support functions, and which is designed and built for installation at a particular offshore location.

204 *Machinery spaces*: All machinery spaces of category A and all other spaces containing propulsion machinery, boilers, oil fuel units, steam and internal combustion engines, generators and major electrical machinery, oil filling stations, refrigerating, stabilizing, ventilation and air conditioning machinery, and similar spaces, and trunks to such spaces.

(SOLAS Reg. II-1/3.16)

205 Machinery spaces of category A: Those spaces and trunks to such spaces which contain:

- internal combustion machinery used for main propulsion;
- internal combustion machinery used for purposes other than main propulsion where such machinery has in the aggregate a total power output of not less than 375 kW; or
- any oil-fired boiler or oil fuel unit.

(SOLAS Reg. II-1/3.17)

206 *Machinery Room:* Room in which major items of equipment are installed. The term is used instead of Machinery Space on installations which are non-self propelled or fixed. Depending on the equipment involved requirements will be similar to those for either *Machinery Space* or *Machinery Space of Category A*.

207 *Marine piping*: Piping serving the marine systems on an offshore unit and which is not primarily intended for operation in drilling or hydrocarbon production service or dedicated auxiliary systems.

Marine piping systems include the following:

- ballast system
- bilge system
- air systems
- cooling system
- lubricating oil system
- steam system
- hydraulic system
- firewater system
- fuel oil system
- thermal oil system
- drains system
- feed water and condensate systems.

208 *Mobile offshore unit:* A buoyant construction engaged in offshore operations including drilling, production, storage or support functions, not intended for service at one particular offshore site and which can be relocated without major dismantling or modification.

209 Offshore installation: A collective term to cover any construction, buoyant or non-buoyant, designed and built for installation at a particular offshore location.

- **210** *Redundancy:* The ability to maintain or restore a function when one failure has occurred. Redundancy can be achieved for instance by installation of more than one unit (component redundancy) or by having two or more separate systems capable of performing the same function (system redundancy).
- 211 Redundancy types: Are defined by the time lag accepted upon restoring a lost function, due to failure in a component or system, designed with redundancy.

Redundancy type	Time lag in re-establishment of function
0	None (continuously available)
1	Up to 30 s
2	Up to 10 minutes
3	Up to 3 hours
not defined	More than 3 hours

- 212 Self-elevating unit: A unit with movable legs capable of raising its hull above the surface of the sea.
- 213 Ship-shaped unit: A unit with a ship- or barge-type displacement hull of single or multiple hull construction intended for operation in the floating condition.

E. Abbreviations and Symbols

E 100 Abbreviations

101 Abbreviations used are given in Table E1.

Table E1 Abb	Table E1 Abbreviations		
Abbreviation	Full text		
ABS	acrylonitrile butadiene styrene		
AGMA	American Gear Manufacturers Association		
ANSI	American National Standards Institute		
API	American Petroleum Institute		
ASA	American Standards Association		
ASME	American Society of Mechanical Engineers		
BS	British Standard (issued by British Standard Institution)		
CIBS	Classification Information Breakdown Structure		
DIN	Deutsches Institut für Normung e.V.		
DNV	Det Norske Veritas		
EEMUA	Engineering Equipment and Materials Users Association		
EN	European Norm		
GMAW	gas metal arc welding		
GRE	glass fibre reinforced epoxy		
GRP	glass fibre reinforced polyester		
GTAW	gas tungsten arc welding		
HVAC	heating, ventilation and air conditioning		
ICLL	International Convention on Load Lines		
IMO	International Maritime Organization		
ISO	International Organization for Standardization		
LEL	lower explosion limit		
LNG	liquefied natural gas		
MPI	magnetic particle inspection		
MT	magnetic particle testing		
NDT	non-destructive testing		
NFPA	National Fire Protection Association		
OS	offshore standard		
OSS	offshore service specification		

PT	dye-penetrant testing
PWHT	post weld heat treatment
RP	recommended practice
RT	radiographic testing
SMACNA	Sheet Metal and Air Conditioning Contractors National Association
TBK	Norwegian Pressure Vessel Committee
TEMA	Tubular Exchangers Manufacturers Association
TR	test report
UKOOA	United Kingdom Offshore Operators Association
USCG	U.S. Coast Guard
UT	ultrasonic testing
WPQT	welding procedure qualification test
WPS	welding procedure specification
WPT	welding production test

E 200 Symbols

201 Symbols used are given in Table E2.

Table E2 Syr	Table E2 Symbols						
Symbol	Definition						
T_I	nominal wall thickness						
T_0	strength thickness in mm						
T	minimum required wall thickness in mm						
C	corrosion allowance in mm						
B	bending allowance in mm						
σ_{t}	permissible stress in N/mm ²						
$\sigma_{\!b}$	specified minimum tensile strength of the material in N/mm^2 at $20^{\circ}C$						
σ_{ft}	specified minimum yield stress or 0.2% proof stress of the material in N/mm² at design material temperature						
p	design pressure in bar						
D	outer diameter of pipe in mm						
$\sigma_{b1000000}$	average value for stress to rupture after 100 000 hours at design material temperature						
а	percentage negative manufacturing tolerance						
e	strength ratio						

F. Documentation

F 100 General

- **101** Documentation requirements shall be in accordance with the NPS DocReq (DNV Nauticus Production System for documentation requirements) and DNV-RP-A201.
- 102 Documentation with regard to LNG Terminals is given in DNV-OSS-309 Verification, Certification and Classification of Gas Export and Receiving Terminals
- **103** For documentation requirements related to certification and classification, see Ch.3.



MARINE AND MACHINERY SYSTEMS AND EQUIPMENT

CHAPTER 2

TECHNICAL PROVISIONS

CONTE	ENTS	PAGE
Sec. 1	Design Principles	17
Sec. 2	General Piping Design	22
Sec. 3	Platform Piping Systems	35
	Machinery Piping System	
	Machinery and Mechanical Equipment.	
	Pipe Fabrication, Workmanship, and Testing	

SECTION 1 DESIGN PRINCIPLES

A. Arrangement

A 100 General

- 101 All machinery, systems and components that shall be operated or subject to inspection shall be installed and arranged for easy access.
- 102 All components in a system shall be satisfactorily matched with regard to function, capacity and strength. Relative motions between parts of the machinery shall be allowed for without inducing detrimental stresses.
- 103 All machinery shall be equipped with control and instrumentation considered necessary for safe operation of the machinery.
- 104 All spaces in which machinery is operated and where flammable or toxic gases or vapours may accumulate, or where a low oxygen atmosphere may occur, shall be provided with adequate ventilation under all conditions.

Guidance note:

By adequate ventilation is meant natural or mechanical ventilation sufficient to prevent an accumulation of gases above a concentration of 25% of their Lower Explosion Limit (LEL).

105 The capacity and arrangement of machinery spaces and emergency generator room ventilation shall cover demands for operating the machinery, boilers and emergency generator at full power in all weather conditions.

On floating installations, ventilation inlets and outlets shall be located not less than 4.5 m above freeboard deck. Supply of air to the engine room/main power generation room, emergency power room and fire pump room shall be ensured even in the event of failure of one ventilation fan. As an alternative to the redundancy requirements in B300 alternative provision of air by adequate openings will be specially considered.

Guidance note:

Necessary capacity of ventilation may be calculated according to ISO Standard 8861.

$$\hbox{---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---}\\$$

- 106 Service and utility systems (e.g. steam, heating medium, cooling medium, compressed air, drains etc.) connected to systems containing flammable or toxic liquids or gases shall normally not be combined with similar systems located in non-hazardous areas or connected to non-hazardous systems.
- 107 Any connection between hazardous and non-hazardous systems shall be designed to eliminate or control the risk of ingress of hazardous material from one system to the other due to incorrect operation or leaks.

The following issues shall be evaluated by the designer and documented before systems are interconnected:

- identify possible failure modes and define a realistic range of leak sizes
- evaluate possible consequences of cross contamination
- describe and evaluate reliability, maintainability and testability of active and passive protection systems (e.g. liquid seals, non return valves, detectors, actuated valves, primary and secondary loops etc.).

If the potential consequences of cross contamination are found to be significant or the reliability of protective measures is difficult to maintain or verify, separated systems shall be specified.

Guidance note:

Investigations following incidents have shown that gas can migrate backwards against the flow of liquids and past check valves. Check valves alone are not normally regarded as reliable devices for prevention of cross contamination where gas is present.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

A 200 Prevention of inadvertent operations

- **201** The machinery shall be so arranged that inadvertent operation leading to reduced safety of the unit or installation or personnel, cannot occur as a consequence of one single operational error.
- 202 The machinery and piping systems shall be arranged to prevent sea water, stored hydrocarbons or chemicals or ballast from reaching dry spaces of the installation or stored hydrocarbons or chemicals from being discharged overboard as a consequence of inadvertent operations. Measures shall also be taken to prevent inadvertent movement of ballast or stored fluids internally within these systems.
- **203** Systems and tanks shall be so arranged that leakage or operation of valves will not directly lead to increased risk of damage to machinery, installation or personnel due to mixing of different fluids.
- 204 Open or closed position of valves shall be easily visible.
- **205** If a valve's function in the system is not evident, there shall be adequate information on a name plate attached to the valve.
- 206 All connections to sea shall be marked: **SEA DIRECT**.

A 300 Communications

- **301** For self propelled units, at least two independent means shall be provided for communicating orders from the navigating bridge to the position in the machinery space or in the control room from which the engines are normally controlled.
- **302** For self propelled units ,at least one means of communication shall be provided between the control station or bridge and any other control position(s) from which the propulsion machinery may be controlled.

A 400 Engineers' alarm

401 For self propelled units arrangement shall be provided at the main propulsion control station or at the manoeuvring platform as appropriate for the operation of an engineers' alarm which shall be clearly audible in the engineers' accommodation

A 500 Fire protection

- **501** Facilities for the safe storage and handling of flammable fluids shall be found on board.
- **502** All spaces where oil-burning installations, settling tanks or daily service fuel oil tanks are located, shall be easily accessible and well ventilated.
- 503 Where small leaks of flammable fluids may occur during normal service or routine maintenance work, special arrangements shall be made to prevent these fluids from reaching other parts of the machinery where danger of ignition may arise.
- **504** Piping and other installations for the transport of flammable fluids shall be so located that the fire hazard resulting from rupture and other failures, is acceptably low.

- **505** Exhaust pipes shall not be led in the vicinity of fuel oil tanks, storage tank bulkheads.
- **506** All surfaces which may reach a temperature of 220°C or more, shall be insulated or equivalently protected so that flammable fluids cannot be ignited.
- **507** Where oil absorbing insulating material is used, the insulation shall be covered by non-combustible vapour-tight sheeting.
- **508** All other possible ignition sources of the machinery shall be protected in order to prevent ignition of flammable fluids.
- **509** Flammable or oil absorbing materials shall not be used in floors, gratings etc. in boiler and engine rooms, shaft tunnels or in compartments where settling tanks are installed.
- 510 Fuel oil purifiers for heated fuel oil or hydraulic power aggregates with pressure higher than 15 bar and power delivery higher than 5 kW located within the boundaries of machinery spaces of category A, shall be placed in separate rooms enclosed by steel bulkheads extending from deck to deck and provided with self-closing doors. The rooms shall be provided with:
- independent mechanical ventilation
- fire detection system
- fixed fire extinguishing installation.

It must be possible to activate the extinguishing installation from outside the room and separately from the fire extinguishing of the engine room. From the same position it shall also be possible to stop fuel pumps, ventilation fans, oil purifiers or hydraulic pumps located in the room.

- 511 If it is impracticable to locate the installations addressed in 510 in separate rooms, special considerations shall be given with regard to location and shielding against leakages hitting sources of ignition. The installations shall be covered by a fire extinguishing system capable of being activated automatically or activated manually from the machinery control position or from another suitable location. If automatic release is provided, additional manual release shall be arranged.
- 512 Approved penetrations shall be used where pipes are passing through fire resistant bulkheads or decks.

A 600 Piping systems

- **601** Metallic pipes shall be connected by welding or brazing or by detachable connections in accordance with Sec. 6.
- **602** Plastic pipes shall be connected by welding, gluing, cementing, lamination or similar methods in accordance with Sec.6 or by approved detachable connections.
- **603** Installation of pipes for water, steam or oil behind or above electric switchboards shall be avoided as far as possible. If this is impracticable, all detachable pipe joints and valves shall be at a safe distance from the switchboard or well shielded from it.
- **604** Routing of water pipes and air and sounding pipes through freezing chambers shall be avoided.

A 700 Operation of valves

- 701 Sea suction and discharge valves located in dry compartments, bilge valves and valves on the fuel oil and lubricating oil tanks which are situated higher than the double bottom tanks, shall be arranged for local manual operation. The change over to manual operation from possible remote control arrangement shall be simple to execute.
- 702 All valves in storage and ballast tanks which are hydraulically or pneumatically controlled shall also be arranged for manual operation for example, with a hand-pump connected to the control system.
- 703 Spindles of sea suction valves, discharge valves below

- the load line, emergency bilge valves in engine rooms and blow down discharge valves are to extend above the floor plates or by other means be easily accessible and visible.
- 704 Remotely controlled valves shall be provided with indications for open and closed valve positions at the control station. In cases where the possibility of local manual operation is required in addition to the remote control, means of observing the valve position at the valve location shall be provided.
- 705 Valves for sea inlets and discharges shall be arranged for direct manual operation by means of a mechanical device or permanently installed hand pump. Any valve serving a sea inlet or a discharge below the load waterline shall be remotely operated from above the damage waterline.

Discharges between load waterline and damage waterline may be fitted with one locally closable non-return valve. The valves shall be fitted as close to the inlet or discharge as possible. The controls shall be readily accessible and shall be provided with indicators showing whether the valves are open or closed. All connections to sea shall be marked: **SEA DIRECT.**

706 In addition, requirements for weathertight and watertight integrity as given in DNV-OS-C301, shall be complied with.

A 800 Valves on sides and bottom of floating units and installations

801 All outlets and sea inlets shall have easily accessible valves or cocks fitted:

- to the shell plating on steel pads welded to the plating with spigots passing through the plating
- to integral sea chests of rigid construction with pads welded on.
- **802** Drainage from open deck may be accepted without valves provided the pipes have substantial wall thickness. See DNV-OS-C301 Ch.2 Sec.2 F200 for definition of substantial wall thickness.
- **803** For units or installations with double side and/or bottom, the following requirements apply:
- a) The valve may be fitted to the inboard tank boundary.
- b) The pipe wall thickness between side and bottom and inner boundary shall be minimum 11 mm, regardless of pipe diameter and regardless the shell plating thickness. Accessibility for replacement should be considered in specifying the wall thickness.
- c) Due attention shall be paid to the detail design to avoid high stresses being introduced at pipe fixations, as for example where the outer and inner boundary are connected by a short and straight pipe.
- d) Outlet- or inlet-pipes passing through heated fuel oil tanks or lubricating oil tanks shall be surrounded by cofferdams.
- **804** All outlets and sea inlet valves shall be fitted to the shell in such a way that piping inboard of the valves may be disconnected without interfering with the watertight integrity of the shell.
- **805** Distance pieces of steel of short, rigid construction may be fitted between the valves and the shell plating. The thickness of the distance piece shall not be less than given in DNV-OS-C301, Ch.2 Sec.2 F200.

The distance pieces shall be arranged with spigots passing through the shell plating. Stud holes are not to penetrate the shell plating or the sea chest plating.

806 Valves and cocks for blow down of boilers shall have a protection ring fitted on the outside of the shell plating through which the spigot shall be carried.

The spigot shall terminate flush with the outer side of the ring.

- **807** Suction and discharge valves of steel and sea chests and distance pieces shall be protected against corrosion by an efficient coating or equivalent.
- **808** All suction and discharge pipes shall be adequately protected where they are liable to be damaged by stored hydrocarbons etc.
- **809** Sea inlets shall be so designed and arranged as to limit turbulence and to avoid entry of air due to the unit/installation's movements.
- **810** Scuppers and sanitary discharges, see DNV-OS-C301, Ch.2 Sec.2.
- 811 Sea inlets and discharge valves for systems where plastic piping is used shall be arranged with remote closing arrangement. The adequacy of this system shall be documented.

A 900 Fittings on watertight bulkheads

- **901** Where a collision bulkhead is provided, drain cocks shall not be fitted to the bulkhead, nor shall other openings be cut in the bulkhead.
- 902 No drain valve or cock shall be fitted to watertight bulkheads unless they are accessible at all times and capable of being closed from above the deep load line. Alternatively the valve shall be of the self-closing type. Indication of open and closed position of the valves and cocks shall be provided.
- **903** Fastening of fittings, pipes, etc. to bulkheads or tunnel plating by means of bolts passing through clearing holes in the plating is not acceptable.

A 1000 Requirements dependent upon damage stability calculations

1001 For units or installations where damage stability requirements apply, precautions shall be taken to prevent intercommunication through damaged pipe lines between flooded and intact compartments.

For this purpose, where any part of a pipe system is situated within the defined damaged area and the pipe line has an open end in a compartment assumed to be intact, then an isolating valve shall be fitted. The valve shall be situated outside the damaged area and shall be operable from the freeboard deck or from another position and accessible when the ship is in damaged condition. For bilge lines, the remotely operated stop valves may be substituted by a non-return valve.

Guidance note:

For compliance with IMO Modu Code bilge lines may only be fitted with a positive closable valve from above the waterline.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

B. Construction and Function

B 100 General

- 101 The machinery shall be so designed, installed and protected that risks of fire, explosions, accidental pollution, leakages and accidents thereof are acceptably low.
- **102** Reliability and availability of the machinery shall be adapted according to considerations of the consequences from machinery failures and disturbances.
- 103 The design arrangement of machinery foundations, shaft connections, piping and ducting shall take into account the effects of thermal expansion, vibrations, misalignment and hull interaction to ensure operation within safe limits. Bolts and nuts exposed to dynamic forces and vibrations shall be properly secured.

B 200 Environmental conditions

201 Table B1 gives environmental conditions for ship-shaped units and installations.

Table B1 Environmental condition for unit or installation of								
ship-shaped type								
	Angl	e of inclinat	tion (degre	ees) ¹⁾				
Systems or components	Ath	wart	Fore	and aft				
	Static	Dynamic	Static	Dynamic				
Main and auxiliary machinery	±15	0 ± 22.5	±5	0 ± 7.5				
Safety equipment, e.g. emergency power installations, emergency fire pumps and their devices, electronic appliances and remote control systems, etc.	±22.5	0 ± 22.5	±10	0 ± 10				
1) Athwart, fore and aft is	nclinations	or trim may o	occur simult	taneously				

202 Table B2 gives environmental conditions for column-stabilised and self-elevating units or installations.

Table B2 Environmental condition for column-stabilised and self-elevating units or installations						
Systems or components		ination (degrees) direction				
	Static	Dynamic				
Main and auxiliary machinery	±15	±22.5				
Safety equipment, e.g. emergency power installations, emergency fire pumps and their devices, elec- tronic appliances and remote con- trol systems, etc.	±15	±25				

- 203 All components and systems covered by this standard shall be designed to operate under the following environmental conditions unless otherwise specified in the detailed requirements for the component or system:
- a) Ambient air temperature in the machinery space between 0°C and 45°C.
- b) Relative humidity of air in the machinery space up to 96%.
- c) Sea water temperature up to 32°C.
- d) List, rolling, trim and pitch of mobile units and floating installations according to Table B1 and Table B2. Deviations from the angles of inclination given in the tables may be considered in cases where calculations show that the maximum angle of inclination which can be reached by the unit in damaged condition is below the values given.

Guidance note:

Environmental conditions for instrumentation are given in DNV-OS-D202 Pt.2 Sec.4.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

204 Where the standard gives requirements for capacity or power of machinery, these shall be determined at the ambient reference conditions stated in Table B3.

Table B3 Ambient reference conditions for machinery					
Parameter	Value				
Total barometric pressure	1 bar				
Ambient air temperature	45°C				
Relative humidity of air	60%				
Sea water temperature	32°C				

205 The engine manufacturer shall not be expected to provide simulated ambient reference conditions at a test bed unless specified in the relevant standards.

B 300 Functional capability and redundancy(floating units)

301 Components and systems shall be arranged with redundancy so that a single failure of any active component or system does not cause loss of any main function, with the exceptions listed in 305.

Guidance note:

Main functions for all types of mobile units and floating installations include:

- power generation
- fire protection, detection and extinction
- drainage and bilge pumping
- ballasting
- anchoring and mooring / position keeping.

For self-propelled mobile offshore units propulsion and steering are also regarded as main functions.

For fixed installations main functions will include:

- power generation
- fire protection, detection and extinction

- **302** Redundancy can either be arranged as component redundancy or system redundancy as defined in Ch.1 Sec.1 D200.
- **303** For redundancy on a component level a single failure of an active component shall not lead to a reduction of the output power for the main function served, as long as the main function is served by one system only.
- **304** For duplicated systems a single failure of an active component or a system shall not reduce the output power for the main function, served by the duplicate system, to less than 40% of the nominal output rated power. 301 and 302 shall be considered as general requirements. For evaluation of deviations or equivalent solutions reference should be made to the relevant standard for the component or system in question.

Guidance note:

For single engine propulsion plants all active components must be duplicated to satisfy 301 and 307. Multi engine propulsion plants or propulsion plants with combinations of diesel engines, gas turbines and/or electrical motors are considered to provide redundancy on a system level. For these plants, duplication of the active components is not necessary provided that at least 40% of output rated power for the main function is remaining in case of a single failure. For propulsion plants where less than 40% of output rated power remains, after a single failure, duplication of the active components will be required. "Output rated power" is in this context the total rated propulsion power for the driven unit (e.g. one or several propellers).

All other main functions shall be treated accordingly.

305 The following active components are general exceptions to 301 and are not required as part of the designed redundancy, unless otherwise specified in the rules:

- main engine
- shafting, gear, driven unit (e.g. propeller)
- anchor windlass
- machinery for emergency power supply
- auxiliary thrusters.
- 306 Components and systems forming part of the designed redundancy are normally to be arranged as redundancy type 2 (see Ch.1 Sec.1 D200). When the interruption of the function, of a duplicated component or system, entails considerable hazard to other components or systems, or to the unit or installation, redundancy type 1 shall be arranged. The installation can be arranged as redundancy type 3 if accepted in the relevant standard.
- **307** Active components, arranged as part of the designed redundancy, shall be so dimensioned that in the event of a sin-

gle failure sufficient capacity remains to cover demands at the maximum continuous load of the component served.

Guidance note:

Only relevant for plants where it is required to have redundancy on a component level (e.g. single engine plants, see 302).

- **308** When two or more components are performing the same function, these shall be mutually independent and at least one shall be independently driven. Components arranged as part of the designed redundancy, yet only performing auxiliary functions to a main unit, can be directly powered by the main unit through separate power transmissions, on the condition that these components are not necessary for the starting of the main unit.
- **309** The machinery shall be so arranged and designed that all main functions can be maintained simultaneously in normal service.
- **310** For self-propelled units maintenance tasks normally expected to occur at short intervals, for example weekly, shall be carried out without loss of propulsion or steering.
- 311 Change over from one normal operational mode to another normal operational mode of the machinery shall be possible without interruption in propulsion or steering.
- **312** Machinery or equipment having remote or automatic control, shall have additional alternative provisions for attendance and operation.
- 313 For mobile offshore units the machinery shall be so arranged that it can be brought into operation from the «dead ship» condition within 30 minutes using only the facilities available on board. «Dead ship» condition is understood to mean that the entire machinery installation, including the power supply, is out of operation and that auxiliary services (such as compressed air, starting current from batteries etc.) for bringing the main propulsion into operation and for the restoration of the main power supply are not available.

In order to restore operation from the «dead ship» condition, an emergency generator may be used provided that it is ensured that the emergency power supply from it is available at all times. It is assumed that means are available to start the emergency generator at all times.

- **314** Requirements for cold starting arrangements of floating offshore installations shall be especially determined depending on project specific assessment of the safety hazards involved.
- 315 The performance and capacity of auxiliary systems shall be adapted to the needs of the machinery installations served.

B 400 Failure effects

- **401** In the event of failure, components and systems shall enter the least hazardous of the possible failure states with regard to machinery, personnel and environment.
- **402** The probability that failure in a component causes damage or failure to other components, shall be acceptably low.
- **403** Failure of one component in a system arranged as part of the designed redundancy shall not lead to failure or damage to backup or parallel components or systems.

B 500 Component design

- 501 Where no specific requirements are given in these standards regarding dimensioning and choice of materials, generally recognised standards and engineering principles may be applied.
- **502** If acceptable accuracy cannot be obtained by strength calculations, special tests for the determination of the strength of the design may be required.
- 503 When it is of essential significance for the safety of the unit or installation that the function of a component is main-

tained as long as possible in the event of fire, materials with high heat resistance shall be used.

504 Materials with low heat resistance shall not be used in components where fire may cause outflow of flammable or health hazardous fluids, flooding of any watertight compartment or destruction of watertight integrity.

Guidance note:

Materials with high heat resistance are materials having a melting point greater than 925°C. Materials with low heat resistance are all other materials. Deviations from the above requirement will be subject to special considerations.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

C. Personnel Protection

C 100 General

101 Machinery, boilers and associated piping systems shall be so installed and protected as to reduce to a minimum any danger to persons onboard, due regard being paid to moving parts, hot surfaces and other hazards.

102 Every deck, gangway, stairway and opening, down which a person could fall more than 2 m, shall, where practicable, be provided with a toe board not less than 150 mm high and suitable guard-rails of adequate strength comprising at least three courses so arranged that the lowest rail is not more than 150 mm above the toe board and the highest rails not less than 1 m above the deck.

SECTION 2 GENERAL PIPING DESIGN

A. General

A 100 Application

- 101 This section gives minimum requirements which apply to piping systems, including bends, tees, valves, fittings, flanges, flexible elements, etc.
- 102 The design and installation of piping systems should conform to a recognised design code or standard, subject to any modifications under the following requirements.
- 103 Piping systems used for safe operation of the unit or installation shall in general be separate from piping systems used for drilling or production operations. If cross connections are necessary, appropriate means shall be fitted to prevent possible contamination of the safe system from any hazardous medium.
- 104 All requirements are based on the assumption that piping and components are subject to preventative maintenance throughout the intended lifetime of the unit or installation.
- 105 For cases where this assumption is not valid, corrosion resistant materials, additional corrosion allowance and/or special corrosion protection should be considered.
- 106 If a floating offshore installation other than MOU is intended to be built and disposed within the EU Member States (including EEA EFTA States) the piping design including components and materials must conform to the minimum safety requirements outlined in the "Pressure Equipment Directive 97/23/EC". Exclusions from the directive are listed in article no. 1 in the directive. Refer also Guideline 1/27 regarding MOU and FPSO. Harmonized European standards for the design and fabrication of materials, valves, fittings and pipes will in general fulfil the requirements outlined in the directive.

Guidance note:

The Pressure Equipment Directive may also be referred to as the PED Directive. It's formal title is: DIRECTIVE 97/23/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 29 May 1997 on the approximation of the laws of the Member States concerning pressure equipment

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

A 200 Categories of piping classification

- **201** Piping classification is applied on the basis of intended inventory, pressure and temperature conditions.
- **202** The designated piping "class" is used to indicate the materials, manufacturing and inspection requirements which shall be applied to ensure the operational integrity of piping.
- **203** For the purpose of certification, testing, type of joint to be adopted, heat treatment and welding procedures, piping shall be subdivided into three classes as given in Table A1.
- **204** Class II and class III pipes shall normally not be used for design pressure or temperature conditions in excess of those shown in Table A1.
- **205** Class I pipes shall be used where either the maximum design pressure or temperature exceeds the applicable values of class II pipes.
- **206** In addition to the pressure piping systems in Table A1, class III pipes may be used for open ended piping, for example overflows, vents, open ended drains, etc.
- **207** A project may decide to categorise systems more stringently based on considerations other than safety. Factors such as consequence of failure and ease of repair with respect to need to limit operations may also be considered.

Table A1 Classes of piping systems									
Dining gratam for	Class I ¹⁾		Class	s II ²⁾	Class III ²⁾				
Piping system for	p (bar)	t (°C)	p (bar)	t (°C)	p (bar)	t (℃)			
Steam, thermal oil	> 16	or > 300	≤ 16	and ≤ 300	≤ 7	and ≤ 170			
Flammable fluids ³⁾	> 16	or > 150	≤ 16	and ≤ 150	≤ 7	and ≤ 60			
Other media ⁴⁾	> 40	or > 300	≤ 40	and ≤ 300	≤ 16	and ≤ 200			

p = Design pressure

- 1) For class I piping one condition (temperature or pressure) is required to be met.
- 2) For class II and III piping both specified conditions (temperature and pressure) shall be met.
- 3) Flammable fluids include: gas, thermal oil, crude oil, lubricating oil, hydraulic oil, etc. with flash point ≤ 60°C and fuel oil.
- 4) Other media include: other lubricating oil and hydraulic oil, sea water, fresh water, compressed air, sanitary water, bilge, ballast, etc.

B. Materials

B 100 General principles

101 Materials used in piping systems shall be suitable for the medium and service for which the system is intended. The following aspects should be considered when selecting materials:

- type of service
- compatibility with other materials in the system such as valve bodies and casings, for example in order to minimise
- bimetallic corrosion
- ability to resist general and localised corrosion or erosion caused by internal fluids and/or marine environment
- ability to resist selective corrosion, for example de-zincification of brass, de-aluminification of aluminium brass and graphitization of cast iron
- ductility
- need for special welding procedures
- need for special inspection, tests, or quality control.

t = Design temperature

- 102 Materials to be used in the construction of piping systems shall be manufactured and tested in accordance with DNV-OS-B101.
- 103 Carbon steel materials are in general suitable for the majority of the piping systems.
- 104 Galvanised pipes are recommended as the minimum protection against corrosion for pipes in seawater systems, including those for bilge, air vent and ballast service.
- 105 Austenitic stainless steel pipes are not recommended for seawater services, as they are prone to pitting.
- 106 Non-ferrous metallic materials may be accepted in piping system transporting flammable fluids and in bilge piping provided that fire endurance properties in accordance with a recognised code is documented.

B 200 Carbon and low alloy steel

- **201** Steel pipes for application as class I or class II, or for use where pressures exceed 40 bar, shall be seamless drawn pipes. Welded pipes may be accepted for class I and II pipes where delivered in accordance with DNV-OS-B101.
- **202** Steel pipes for elevated temperature service may be used within the temperature limits given in Table C5.
- 203 Cast and forged carbon and carbon manganese steel may be used for temperatures up to 400°C. Application at higher temperatures may be acceptable provided that:
- metallurgical behaviour and time dependent strength (ultimate tensile strength after 100 000 hours) are in accordance with national or international codes or standards, and
- such values are guaranteed by the steel manufacturer.
- **204** Where the above conditions cannot be met, special heat resisting alloy steels shall be used.

B 300 Copper and copper alloys

- **301** Copper and copper alloy pipes for application as class I or class II shall be of seamless drawn material in accordance with DNV-OS-B101.
- **302** Copper and copper alloys shall not normally be used for media having temperature above the limits given in Table B1.

Table B1 Operating temperature limits of copper and copper alloy piping						
Piping material	Temperature limit					
Copper and aluminium brass	200°C					
Copper nickel	300°C					
Special bronze suitable for high temperature service	260°C					

303 Copper or copper alloys shall not be used for pipes with outer diameter > 44.5 mm for compressed air service with pressure above 20 bar.

B 400 Cast iron

- **401** Grey cast iron shall not be used for class I and II piping. Grey cast iron may be utilised for components in hydraulic piping systems, subject to special consideration on a case by case basis.
- **402** Grey cast iron may normally be used for class III piping, with the following exceptions:
- pipes and valves fitted on the unit or installation sides and bottom and on sea chests
- valves fitted on collision bulkhead
- valves under static head fitted on the external wall of fuel tanks
- pipes, valves and fittings for boiler blow-down systems and other piping systems subject to shock or vibration

- bilge and ballast lines in tanks
- valves for fluids with temperatures in excess of 120°C.
- **403** Nodular graphite cast iron of the ferritic type, with a minimum elongation on A_5 of 12% ($L_0 = 5d$), may be used in class II and III piping, in pipes and valves located on the unit or installation's side and bottom, and valves on the collision bulkhead.
- **404** The use of nodular cast iron in class I piping shall be subject to special consideration on a case by case basis.
- **405** Nodular cast iron should not be used for media having a temperature exceeding 350°C, or less than 0°C.
- 406 Nodular cast iron of the ferritic/pearlitic and pearlitic type shall normally be subject to the same limitations of use as for grey cast iron in 401 and 402. In addition, nodular cast iron pipes of the ferritic/pearlitic type with an elongation A_5 of at least 7% may be used in bilge and ballast lines in pipe tunnels in double bottom.

B 500 Plastic pipes

501 Plastic pipes may be used in systems and locations according to Table B2 provided the specified fire endurance requirements are fulfilled.

Guidance note:

The permitted use is in conformance with IMO Resolution A.753(18) *Guidelines for the Application of Plastic Pipes on Ships* except for requirements for smoke generation and toxicity.

All pipes, except those fitted on open decks and within tanks, cofferdams, pipe tunnels and ducts should have low surface flame spread characteristics not exceeding average values listed in IMO Resolution A.653(16). Surface flame spread characteristics may be determined using the test procedures given in ASTM D3806.

Where a fire protective coating of pipes and fittings is necessary for achieving the fire endurance level required, it should meet the following requirements:

- a) The pipes should generally be delivered from the manufacturer with the protective coating on.
- b) The fire protection properties of the coating should not be diminished when exposed to saltwater, oil or bilge slops. It should be demonstrated that the coating is resistant to products likely to come into contact with the piping.
- c) In considering fire protection coatings, such characteristics as thermal expansion, resistance against vibrations, and elasticity should be taken into account.
- d) The fire protection coatings should have sufficient resistance to impact to retain their integrity.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

- **502** Alternatively to 501 the approach for establishing design performance requirements given in UKOOA document "Specification and Recommended Practice for use of GRP piping offshore", may be used.
- **503** Plastic pipes may also be used for pneumatic and hydraulic control pipes within closed control cabinets, except in systems for remote control of systems for main functions.

This will include:

- steering gear
- fire extinguishing systems
- seawater valves (ballast and cooling)
- valves on fuel oil service tanks
- valves in bilge and fuel oil systems.
- **504** Plastic pipes which shall be used in piping systems subject to the limitations of Table B2 shall be tested to a suitable specification.

Tabl	e B2 Fire endurance requirements m	atrix									
	Piping systems Location										
		A	В	С	D	E	F	G	Н	I	J
		Machinery spaces of category A	Other machinery spaces	Cargo pump rooms	Other dry cargo holds	Cargo tanks	Fuel oil tanks	Ballast water tanks	Cofferdams, void spaces, pipe tunnel and ducts	Acco mmodation service and control spaces	Open decks
CAR	RGO Flammable fluids or liquids (flash	n point ≤	60°C)								
1	Crude or oil product lines	NA	NA	L1	NA	0	NA	0 9)	0	NA	L1 ²⁾
2	Crude oil washing lines	NA	NA	L1	NA	0	NA	0 9)	0	NA	L1 ²⁾
3	Vent lines	NA	NA	NA	NA	0	NA	0 9)	0	NA	X
INE	RT GAS										
4	Water seal effluent line	NA	NA	0 1)	NA	0 1)	0 1)	0 1)	0 1)	NA	0
5	Scrubber effluent line	0 1)	0 1)	NA	NA	NA	NA	0 1)	0 1)	NA	0
6	Main line	0	0	L1	NA	NA	NA	NA	0	NA	L1 ⁶⁾
7	Distribution lines	NA	NA	L1	NA	0	NA	NA	0	NA	L1 ²⁾
FLA	MMABLE LIQUIDS (flash point > 6										T
8	Crude or oil product lines	X	X	L1	X	NA ³⁾	0	0 9)	0	NA	L1
9	Fuel oil	X	X	L1	X	NA ³⁾	0	0	0	L1	L1
10	Lubricating oil	X	X	L1	X	NA	NA	NA	0	L1	L1
11	Hydraulic oil	X	X	L1	X	0	0	0	0	L1	L1
SEA	WATER 1)					T		T			T
12	Bilge main and branches	L1	L1	L1	X	0	0	0	0	NA	L1
13	Fire main and water spray	L1	L1	L1	NA	NA	NA	0	0	X	L1
14	Foam system	L1	L1	L1	NA	NA	NA	NA	0	L1	L1
15	Sprinkler system	L1	L1	L3	NA	NA	NA	0	0	L3	L3
16	Ballast	L3	L3	L3	X	0 9)	0	0	0	L2	L2
17	Cooling water, essential services	L3	L3	NA	NA	NA	NA	0	0	NA	L2
18	Tank cleaning services, fixed machines	NA	NA	L3	NA	0	NA	0	0	NA	L3 ²⁾
19	Non-essential systems	0	0	0	0	NA	0	0	0	0	0
FRE	SHWATER					T		T			T
20	Cooling water, essential services	L3	L3	NA	NA	NA	0	0	0	L3	L3
21	Condensate return	L3	L3	L3	0	NA	NA	NA	0	0	0
22	Non-essential systems	0	0	0	0	NA	0	0	0	0	0
	ITARY OR DRAINS OR SCUPPER		**	Г	1	Г	1	Г	1	1	Г
23	Deck drains (internal)	L1 ⁴⁾	L1 ⁴⁾	NA	0	NA	0	0	0	0	0
24	Sanitary drains (internal)	0	0	NA	0	NA	0	0	0	0	0
25	Scuppers and discharges (overboard)	$0^{1)}$ 7)	01) 7)	01) 7)	01) 7)	0	0	0	0	01) 7)	0
	NDING OR AIR	I		T	1	- 0)	T .	T	T .	1 .	T
26	Water tanks/dry spaces	0	0	0	0	0 9)	0	0	0	0	0
27	Oil tanks (flash point > 60°C)	X	X	X]	X 3)	0	0 9)	0	X	X
	CELLANEOUS	5	5\	5			T .	T	T .		5)
28	Control air	L1 ⁵⁾	L1 ⁵⁾	L1 ⁵⁾	L1 ⁵⁾	NA	0	0	0	L1 ⁵⁾	L1 ⁵⁾
29	Service air (non-essential)	0	0	0	0	NA	0	0	0	0	0
30	Brine	0	0	NA	0		NA	NA	0	0	0
31	Auxiliary low pressure steam (≤ 7 bar)	L2	L2	0 8)	0 8)	0	0	0	0	0 8)	0 8)

Tabl	Table B2 Fire endurance requirements matrix (Continued)					
ABB	ABBREVIATIONS used in Table B2					
L1	Fire endurance test in dry conditions, 60 minutes Appendix 1 of IMO Res. A.753(18)					
L2	Fire endurance test in dry conditions, 30 minutes Appendix 1 of IMO Res. A.753(18)					
L3	Fire endurance test in wet conditions, 30 minutes Appendix 2 of IMO Res. A.753(18)					
0	No fire endurance test required					
NA	A Not applicable					
X	Metallic materials having a melting point greater than 925°C.					

Notes to Table B2:

- 1) Where non-metallic piping is used, remotely controlled valves to be provided at unit's side (valve shall be controlled from outside space).
- 2) Remote closing valves to be provided at the cargo tanks.
- 3) When cargo tanks contain flammable liquids with flash point > 60°C, «0» may replace «NA» or «X».
- 4) For drains serving only the space concerned, «0» may replace «L1».
- 5) When controlling functions are not required by statutory requirements or guidelines, «0» may replace «L1».
- 6) For pipe between machinery space and deck water seal, «0» may replace «L1».
- 7) Scuppers serving open decks in positions 1 and 2, as defined in regulation 13 of the International Convention on Load Lines, 1966, should be «X» throughout unless fitted at the upper end with the means of closing capable of being operated from a position above the freeboard deck in order to prevent downflooding.
- 8) For essential services, such as fuel oil tank heating and unit's whistle, «X» is to replace «0».
- 9) For storage units where compliance with paragraph 3(f) of regulation 13F of Annex I of MARPOL 73/78 is required, «NA» is to replace «0»
- **505** Use of GRE/GRP piping in firewater systems will be subject to special consideration with respect to use of standard fire testing methods. The following parameters will be evaluated:
- results of fire testing
- whether pipe is continuously water filled in service
- location of pipe with respect to likely fire source
- possibility of pipe being engulfed in fire
- possibility of isolation of any damaged section.

Guidance note:

Reference is made to USCG PFM 1-98:

Policy File Memorandum on the Fire Performance Requirements for Plastic Pipe per IMO Resolution A.753(18).

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

B 600 Flanges, valve bodies, etc.

601 Flanges, valve bodies, etc., shall normally be forged or cast and the material shall be suitable for the design temperature.

602 If components are manufactured from forged bar stock, rolled bar stock, forged plate or rolled plate, the material shall be tested in the transverse direction and is to meet the requirements for longitudinal specimens of forged to shape components. Where plate materials are used, additional testing shall be carried out in the short – transverse direction of the materials.

B 700 Bolts and nuts

701 Bolts and nuts for class I and II piping shall conform to a recognised standard, e.g. ISO 898, 703 and 704.

- 702 Major pressure retaining bolts and nuts with specified minimum yield stress above 490 N/mm² shall be made of alloy steel, i.e. (% Cr+% Mo+% Ni) \geq 0.50, and shall be supplied in the quenched and tempered condition.
- **703** For general service in atmospheric environment, the specified tensile properties shall not exceed ISO 898 property Class 10.9.
- **704** Where equipment shall be submerged in seawater, the tensile properties shall not exceed property Class 8.8 or equivalent.

B 800 Material certificates

801 The materials used in piping systems shall be provided with documentation given in Table B4. For definition of types of documentation of material quality and testing, see Table B3.

Table B3 Material certification						
Certification process	ISO 10474 (EN 10204)					
Test report Confirmation by the manufacturer that the supplied products fulfil the purchase specification, and test data from regular production, not necessarily from products supplied	2.2					
Inspection certificate (Works Certificate) Test results of all specified tests from samples taken from the products supplied. Inspection and tests witnessed and signed by QA department	3.1					
Inspection certificate (Test Certificate) As work certificate, inspection and tests witnessed and signed by QA department and an independent third party body	3.2					

Table B4 Material certificates	1		r	1			
		Class of	Nominal	Design tem-	Туре	of documentati	on
Component	Material	piping system	diameter (mm)	perature (°C)	3.2 certificate	3.1 certificate	2.2 report
		I	> 50		х		
Pipes 1)		II, III	> 50			Х	
		I, II, III	≤ 50				X
Flanges and bolts				> 400	X		
				≤ 400			X
	Steel	I	> 100	> 400	X		
			≤ 100	> 400			X
	Steel or nod- ular cast iron	1 11	> 100	≤ 400		X	
Bodies of valves and fittings 1), source		I, II	≤ 100	≤ 400			X
materials of steel expansion bellows, other pressure containing components	uiai castiioii	III					X
not considered as pressure vessels	Cast iron	III					X
•	C	I, II	> 50			X	
	Copper alloys	1, 11	≤ 50				X
	unoys	III					X
Dumm housings		I				Х	
Pump housings		II, III					Х

⁾ Pipes and bodies of valves fitted on unit or installation side and bottom and bodies of valves fitted on collision bulkhead shall be provided with documentation as required for class II piping systems.

C. Design Conditions

C 100 Principles

101 External and internal attachments to piping shall be designed so that they will not cause flattening of pipe, excessive local bending stresses, or harmful thermal gradients in the pipe wall. Constructions causing stress concentrations shall be minimised, particularly in cyclic service applications.

102 All components in a system shall be satisfactorily matched with regard to function, capacity and strength. Relative motions between parts of the piping system shall be accommodated without inducing detrimental stresses.

103 Piping systems shall consist of permanently installed pipes and fittings. The piping system shall be designed and installed such that:

- weight of piping is not supported by connected machinery
- heavy valves and fittings do not cause large additional stress in adjacent pipes
- axial forces due to internal pressure, change in direction or cross-sectional area and movement of the installation or unit are considered
- the support of the piping system shall be such that detrimental vibrations will not arise in the system.

C 200 Pressure relief

201 Pressure containing systems shall normally be designed to withstand the maximum internal pressure which can be exerted under any conditions. Where this is not practicable, the system shall be provided with means of pressure relief.

C 300 Minimum wall thickness

301 Minimum nominal wall thickness for pipes of copper and copper alloys, steel and stainless steel pipes are given in Table C1, Table C2 and Table C3, respectively. For special applications where the pipes can be subject to excessive external loading or are inaccessible during service, increased wall thickness should be considered. Piping under internal pressure shall also meet the requirements of 400.

302 The outer diameters and wall thickness given in Table C1 and Table C2 are recommended minimum values. Reduced wall thickness may only be applied when clearly jus-

tified, e.g. under application of another recognised standard.

303 Allowance for negative tolerance or reduction in thickness due to bending is not normally required.

304 Nominal wall thickness of bilge and ballast pipes and fittings of nodular cast iron, shall not be less than:

$$T = K (0.5 + 0.001 D_n) (mm)$$

 D_n = nominal diameter (mm)

K = 9 for pipes

= 12 for fittings other than tees

= 14 for tees

Table C1 Minimum not and copper alloys	minal wall thickn	ess for pipes of copper
External pipe diameter	Minimum nomi	nal wall thickness (mm)
D(mm)	Copper	Copper alloy
D ≤ 10	1	0.8
10 < D ≤ 20	1.2	1
20 < D ≤ 44.5	1.5	1.2
44.5 < D ≤ 76.1	2	1.5
76.1 < D ≤ 108	2.5	2
108 < D ≤ 159	3	2.5
159 < D ≤ 267	3.5	3
$267 < D \le 470$	4	3.5
470 < D ≤ 508	4.5	4

C 400 Calculation of wall thickness of pipes being subject to internal pressure

401 The nominal wall thickness of pipes subjected to internal pressure shall be calculated as specified in 400, but shall not be less than specified in 300.

402 The *design pressure*, p, to be used in the formula in 409, is defined as the maximum working pressure, and shall not be less than the highest set pressure of the safety valve or relief device.

403 The design pressure requirement stated above shall

apply subject to the following special considerations:

- a) For pipes which are connected to pumps, p shall be equal to the maximum pump pressure, i.e. the safety valve set pressure for displacement pumps, and the maximum pressure on the head-capacity characteristic for centrifugal pumps.
- b) When determining the maximum working pressure p, consideration shall be given to possible pressure surges in the piping.
- c) For steam pipes between boiler and superheater, steam pipes from the superheater, and where the superheater safety valve is controlled by a pilot valve operated by the steam pressure in the saturated steam drum, the design

- pressure p shall be taken equal to the set pressure of this safety valve.
- d) For pipes without safety valves and pressure gauges on the low-pressure side of pressure-reducing valves, p shall be taken equal to the pressure on the high-pressure side of the pressure-reducing valve.
- e) For feed pipes, p shall be taken equal to 1.25 times the boiler design pressure.
- f) Pipes for gas and crude oil in non-hazardous areas shall be designed for a pressure of at least 50% higher than normal working pressure but shall not be less than A.S.A. pipe schedule 40

Table C2 Minimum nomin	al wall thickness	for steel pipes (exc	ept pipes covered by le	oad line regulations)
External diameter D (mm)	Pipes in gen- eral ^{3) 4) 5) 6) 7) 8)}	Air, overflow and sounding pipes for structural tanks ^{1) 2) 3) 5) 8) 9)}	Bilge, ballast and general seawater pipes 1) 3) 4) 5) 7) 8)	Bilge, air, overflow and sounding pipes through ballast and fuel oil tanks ballast lines through fuel oil tanks and fuel oil lines through ballast tanks ¹⁾ 2) 3) 4) 5) 7) 8) 9)
10.2 < D ≤ 12	1.6			
13.5 <d 17.2<="" td="" ≤=""><td>1.8</td><td></td><td></td><td></td></d>	1.8			
20	2			
$21.3 < D \le 25$	2		3.2	
$26.9 < D \le 33.7$	2		3.2	
$38 < D \le 44.5$	2	4.5	3.6	6.3
48.3	2.3	4.5	3.6	6.3
$51 < D \le 63.5$	2.3	4.5	4	6.3
70	2.6	4.5	4	6.3
$76.1 < D \le 82.5$	2.9	4.5	4.5	6.3
$88.9 < D \le 108$	3.2	4.5	4.5	7.1
$114.3 < D \le 127$	3.6	4.5	4.5	8
133 < D ≤ 139.7	4	4.5	4.5	8.8
$152.4 < D \le 168.3$	4.5	4.5	4.5	8.8
177.8	4.5	5	5	8.8
193.7	4.5	5.4	5.4	8.8
219.1	5	5.9	5.9	8.8
$244.5 < D \le 273$	5.6	6.3	6.3	8.8
298.5 < D ≤ 368	6.5	6.3	6.3	8.8
$406.4 < D \le 457$		6.3	6.3	8.8

- 1) For pipes efficiently protected against corrosion, the thickness may be reduced by 20% of the required thickness, but not more than 1 mm.
- 2) For sounding pipes, the minimum wall thickness is intended to apply to the part outside the tank.
- 3) For threaded pipes, where allowed, the minimum wall thickness shall be measured at the bottom of the thread.
- 4) The minimum wall thickness for bilge lines and ballast lines through deep tanks and for cargo lines is subject to special consideration.
- 5) For larger diameters the minimum wall thickness is subject to special consideration.
- 6) The wall thickness of hydraulic pipes in oil tanks in systems for remote control of oil valves shall be no less than 4 mm.
- 7) For inlets and sanitary discharges, see DNV-OS-C301.
- 8) For stainless steel pipes, the minimum wall thickness will be specially considered, but it is in general not to be less than given in Table C3.
- 9) For air pipes on exposed decks, see DNV-OS-C301

Table C3 Minimum wall thickr	ness for stainless steel pipes
External diameter D (mm)	Minimum wall thickness (mm)
$10.2 < D \le 17.2$	1.0
$21.3 < D \le 48.3$	1.6
60.3 < D ≤ 88.9	2.0
114.3 < D ≤ 168.3	2.3
219.1	2.6
273.0	2.9
$323.9 < D \le 406.4$	3.6
D > 406.4	4.0

NOTE:

The external diameters and thickness have been selected from ISO 1127. For pipes covered by other standards, slightly reduced thickness may be acceptable.

- **404** The *design temperature* to be considered for determining the permissible stresses shall be the maximum temperature of the medium inside the pipe.
- **405** The design temperature requirements in 404 shall apply subject to the following special conditions:
- a) For steel pipes and pipes of copper and copper alloys, whose working temperature is lower than 50°C, the design temperature shall be taken equal to 50°C.
- b) For saturated steam, the design temperature shall be equal to the saturation temperature.
- c) For superheated steam with manual steam temperature regulation, the design temperature shall be taken at least equal to the steam temperature +15°C.
- d) For installations with automatic temperature control of the

superheated steam, the design temperature may normally be equal to the steam temperature +5°C.

Guidance note:

For manual or automatic temperature control of superheated steam, it is assumed that any temperature fluctuations greater than 15° or 5°C above the normal working temperature will be of short duration.

406 The minimum wall thickness of a straight or bent pipe shall not be less than:

$$t = t_0 + c$$

407 If the pipe shall be bent, the minimum wall thickness before bending shall not be less than:

$$t + b$$

408 These terms are further addressed in 409 to 417.

409 *Strength thickness* t_0

The strength thickness, t₀, shall not be less than calculated by the following formula:

$$t_0 = \frac{pD}{20\,\sigma_t e + p}$$

410 The formula in 409 is valid for pipes having a ratio of wall thickness to outside diameter of 0.17 or less. Where this ratio exceeds 0.17, special consideration shall be given to the calculation of wall thickness.

411 For steel pipes the permissible stress, σ_t , is in general to be based on the lower value of the following criteria:

$$\frac{\sigma_{\rm b}}{2.7}$$
 and $\frac{\sigma_{\rm ft}}{1.6}$ (for austenitic), or $\frac{\sigma_{\rm ft}}{1.8}$ and $\frac{\sigma_{\rm b\,100000}}{1.8}$

for other material.

412 Permissible stresses for steel pipes are given in Table C4, which refer to the grades of steel specified in DNV-OS - B101.

Table C4 Tensile strength and permissible stress in pipes of copper and copper alloys												
	Minimum				L	esign te	mperati	ire (°C)				
Pipe material	tensile	up to 50	75	100	125	150	175	200	225	250	275	300
	strength (N/mm²))					
Copper, annealed	220	42	42	41	41	35	28	19				
Copper, ((semi-hard))	250	42	42	41	41	35	28	19				
Aluminium-Brass ²⁾ annealed	330	80	80	80	80	80	52	25				
Copper-Nickel 90/10 annealed	290	70	70	69	67	65	63	60	57	53	49	45
Copper-Nickel 70/30 annealed	360	83	81	79	77	75	73	71	69	67	65	63

1) For pipes conveying compressed air, the permissible stresses shall be reduced by 50% if the pressure is pulsating.

2) Cu: 76.0-79.0; Al: 1.8-2.3; As: 0.02-0.06; Zn: remainder

Table C5 Permissil	ble stress in	steel pipes at	elevated t	tempera	ture								
	Heat	TT 11 1 1 1				P	ermissib	le stress	(N/mm^2))			
Steel grade ²⁾	treat-	Wall thick- ness, t(mm)					Тетр	erature	(°C)				
	ment	ness, t(mm)	≤50	150	200	250	300	350	400	450	500	550	600
Unalloyed steel													
TS/TW 360 (NV R 1-1/1-2)	N	$t \le 16$ $16 \le t \le 40$ $40 \le t \le 60$	131 125 119	103 102 96	92 91 88	81 81 81	71 71 71	64 64 64	61 61 61	43 43 43		1 1 1	1 1 1
TS/TW 410-1 (NV R 1-3)	N	$t \le 16$ $16 \le t \le 40$ $40 \le t \le 60$	142 136 131	120 118 113	108 107 104	95 95 95	84 84 84	78 78 78	74 74 74	43 43 43			1 1 1
TS/TW 510 (NV R 1-4)	N	t ≤ 60	172	150	142	131	119	111	99	47	23		
Alloy steel													
TS 440 (NV R 7-2)	N+T	t ≤ 60	161	128	122	117	102	94	91	89	81	30	-
TS 450-1 (NV R 7-1)	N	t ≤ 60	150	132	124	114	96	88	86	83	56	-	-
TS 450-2, TE (NV R 7-3)	N + T	t ≤ 60	156	134	129	124	122	118	115	108	76	38	19
TS 500, TE (NV R 7-2)	N + T	t ≤ 60	217	-	186	183	181	179	176	156	93	49	19
TS 690 (NV R 7-5)	N+T	t ≤ 60	272	-	194	182	176	172	169	162	132	71	33

1) See DNV-OS-E-101 for calculation of permissible stresses for other steel grades.

2) Former comparable NV steel grades are given in brackets. The new steel grades are not fully equivalent to the former grades.

413 For pipes made of copper and copper alloys the permissible stresses are given in Table C4 which refers to copper and copper alloys specified in DNV-OS-B101.

414 For pipes made of materials other than steel, copper or copper alloys, the permissible stresses shall be especially considered.

415 For seamless pipes, including welded pipes from manufacturers who are qualified as providing welded pipes consid-

ered equivalent to seamless pipes, the strength ratio e = 1 applies. For welded pipes from other pipe manufacturers e = 0.9 applies.

416 *Bending allowance b*

In cases where the allowance for bending, b, is not determined by a more accurate method, or where the bending procedure does not include control of the wall thickness, the allowance shall not be less than:

$$b = \frac{1}{2.5} \frac{D}{R} t_0$$

R = mean radius of the bend (mm)

 $\frac{D}{R}$ = The bending ratio

Where the bending ratio is not available, this ratio will be taken equal to 1:3.

417 *Corrosion allowance c*

The corrosion allowance, c, for steel pipes shall be as specified in Table C6. Subject to the following special requirements where applicable:

- For pipes of copper, brasses, copper-tin alloys and Cu-Ni alloys with Ni-content < 10%, the corrosion allowance shall be 0.8 mm.
- For pipes of Cu-Ni alloys with Ni-content ≥ 10%, the corrosion allowance shall be 0.5 mm.
- c) The corrosion allowance may be reduced to zero where the medium has negligible corrosive effect on the material employed.
- d) A greater corrosion allowance should be considered for pipes where there is a risk of heavy corrosion and/or erosion.

Table C6 Corrosion allowance ((c)) for steel pipes	
Piping service	c (mm)
Superheated steam	0.3
Saturated steam	0.8
Steam coils in cargo tanks	2
Feed water for boilers in open circuit systems	1.5
Feed water for boilers in closed circuit systems	0.5
Blowdown pipes (for boilers)	1.5
Compressed air	1
Hydraulic oil	0.3
Lubricating oil	0.3
Fuel oil	1
Cargo oil	2
LPG	0.3
Refrigerants	0.3
Fresh water	0.8
Sea water in general	3

- For pipes passing through tanks, an additional allowance for external corrosion shall be considered according to the figures given in the Table, depending on the external medium.
- For pipes efficiently protected against corrosion, the corrosion allowance may upon approval be reduced up to 50%
- 3) For stainless steels the corrosion allowance may be omitted
- **418** The value of t does not account for any negative manufacturing tolerance, therefore the nominal wall thickness, t_1 , shall not be less than:

$$t_1 = \frac{t}{1 - \frac{a}{100}}$$

419 The minimum wall thickness of branch pipe, including main pipe in way of branch connections, shall be determined

according to a recognised standard and using permissible stresses in accordance with 411. Alternatively, the thickness may be calculated according to 420 provided that the ratio of branch line wall thickness/main line wall thickness > 2.

420 The minimum pipe wall thickness of main pipes at a branch connection shall not be less than:

$$t = t_0 + c \qquad (mm)$$

Guidance note:

This equation is limited by a maximum ratio for branch lines wall thickness/main line wall thickness of 2.

421 In the above equation:

$$t_0 = \frac{pD}{20\,\sigma_t e + p}$$

e = The strength ratio, expressed by the formula:

$$e = e_1 \sin \gamma \frac{1.25}{1.25 + \frac{d_{max} - d_{min}}{2d_{min}}}$$

 e_1 = basic strength ratio. The variation with parameter $D_b / \sqrt{Dt_b}$ is shown in Fig.1.

 d_{max} , = maximum and minimum diameter of extruded opening in the main pipe, respectively (see Fig. 2).

 γ = angle between centre lines of main pipe and branch. γ is not to be less than 45°.

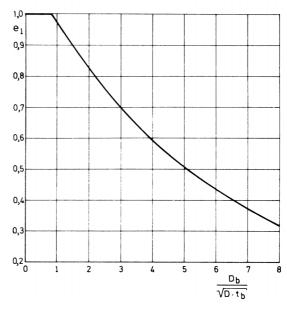
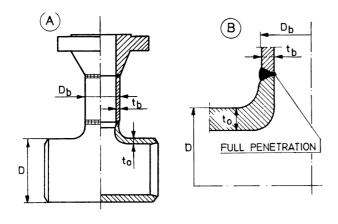
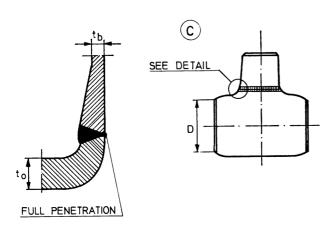


Figure 1 Basic strength ratio





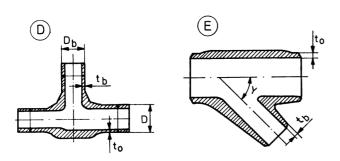


Figure 2
Examples of acceptable branch connections for steam at temperatures above 400°C

C 500 Wall thickness of heavy high pressure pipes

501 A combined stress calculation according to von Mises' theory may be applied for high pressure piping where the wall thickness to outer diameter ratio is outside that given in 410. The equivalent combined stress at any point of the piping wall shall not exceed 60% of the minimum specified yield strength of the material.

502 The equivalent combined stress as defined by von Mises is:

$$\sigma_{\rm e} = 0.707 \sqrt{\left(\sigma_{\theta} - \sigma_{\rm l}\right)^2 + \left(\sigma_{\rm l} - \sigma_{\rm r}\right)^2 + \left(\sigma_{\rm r} - \sigma_{\rm \theta}\right)^2}$$

 $\sigma_{\rm e}$ = equivalent (von Mises) combined stress

 $\sigma_{\theta} = \text{circumferential or hoop stress}$ $\sigma_{1} = \text{longitudinal or axial stress}$

 $\sigma_{\rm r}$ = radial stress

Guidance note:

The calculations σ_{θ} , σ_{1} and σ_{r} may be based on Lame's equations for cylinders.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

C 600 Piping flexibility and support

601 The piping system shall be provided with sufficient flexibility to prevent movement and damage of pipes as a result of thermal expansion and dynamic and static structural deflections.

Guidance note:

The movement due to thermal variations may be approximated as stipulated below:

Carbon steel pipes

Austenitic steel pipes

Copper alloy

GRP/GRE pipes

1.16 mm per °C per 100 m

1.35 mm per °C per 100 m

1.42 mm per °C per 100 m

2-3 mm per °C per 100 m (See manufacturer specification)

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

602 Use of expansion joints or expansion bends shall be considered for piping fitted on deck and near bottom which can be subject to seagoing hull deflections.

Guidance note:

Deflection of the hull girder may be approximated as follows:

- For ship-shaped units made of mild steel, a deflection of ± 0.85 mm/m may be used.
- For ship-shaped units made of high tensile steel, a deflection ±1.2 mm/m in longitudinal direction at deck elevation may be used.

603 Flexibility analysis according to ASME B31.3 may be provided as documentation of adequate piping flexibility and support.

C 700 Plastic pipes

701 The nominal internal pressure for a pipe shall be determined by either:

- dividing the short-term hydrostatic test failure pressure by a safety factor of 4; or
- dividing the long-term hydrostatic (> 100 000 h) test failure pressure by a safety factor 2.5

whichever is the lesser.

702 The hydrostatic test failure pressure shall be verified experimentally or by a combination of testing and calculation methods according to a recognised standard.

703 The nominal external pressure for a pipe shall be determined by dividing the collapse test pressure by a safety factor of 3. The collapse test pressure shall be verified experimentally or by a combination of testing and calculation methods according to a recognised standard.

704 High temperature limits and pressure relative to nominal pressures should be according to the recognised standard subject to 705.

705 The maximum working temperature shall be at least 20°C lower than the minimum heat distortion temperature (determined according to ISO 75 method A, or equivalent) of the resin or plastic material. The minimum heat distortion temperature should not be less than 80°C.

706 Temperature limits and pressure reductions shall be as shown in Table C7 and Table C8 for some material types. These limits may be extended on the basis of acceptable docu-

mentation from the pipe manufacturer. The permissible temperatures stated are for long term service. Short periods of marginally higher temperatures may be acceptable based on case by case considerations.

707 The tables are related to water service only. Services involving other media shall be addressed on a case by case basis

Material	Nominal pres- sure ¹⁾ (bar)	Iominal pres- Permissible working pressure (bar)						
Maieriai	sure ¹⁾ (bar)	−20 to 0°C	30 ℃	40 ℃	50 ℃	60℃	70 °C	80 ℃
DVC	10		7.5	6				
PVC	16		12	9				
ADC	10	7.5	7.5	7	6			
ABS	16	12	12	10.5	9	7.5	6	
HDDE	10	7.5	6					
HDPE	16	12	9.5	6				

Minimum heat	Nominal		xy 1) and polyester pipes (GRP). Permissible pressures and temperature limits Permissible working pressure (bar)						
distortion temper- ature of resin, ISO 74 Method A	pressure ¹⁾ (bar)	−50 to 30 °C	40℃	50℃	60°C	70℃	80℃	90℃	95℃
	10	10	9	7.5	6				
80	16	16	14	12	9.5				
	25	16	16	16	15				
	10	10	10	9.5	8.5	7	6		
100	16	16	16	15	13.5	11	9.5		
	25	16	16	16	16	16	15		
	10	10	10	10	10	9.5	8.5	7	6
135	16	16	16	16	16	15	13.5	11	9.5
	25	16	16	16	16	16	16	16	15

- Minimum heat distortion temperature 135°C
 According to recognised standards for marine use.
- 708 Thermoplastic pipes for installation in external areas shall either be specifically approved for external use, or shall be protected against ultraviolet radiation.
- 709 Plastic pipes are normally made of electrically insulating materials and are as such not acceptable for service in gas hazardous areas. Special quality piping may be used where documented to be electrically conductive (anti-static) according to an appropriate specification.
- 710 The requirement for expansion elements shall be specially considered with respect to the large thermal expansion coefficient of the plastic materials.
- 711 Glass-fibre reinforced epoxy and polyester pipes are considerably more exposed to damage from impact and local overloading than steel pipes. Handling, installation and inspection of such pipes shall take care to avoid such damage.
- 712 Where design loads incorporate a significant cyclic or fluctuating component, fatigue effects shall be considered in material selection and installation design.
- 713 Piping material shall be compatible with the fluid to be carried or in which it will be immersed (e.g. for other liquids or gases than the normal such as water and common hydrocarbons).

C 800 Sizing criteria for liquid lines

801 Single-phase liquid lines shall primarily be sized on the basis of flow velocity. The flow velocity in lines with continuous flow, such as lines for transporting cooling water, should not exceed:

- 3 m/s for Al-brasses
- 3.5 m/s for Cu/Ni 90/10
- 4.5 m/s for Cu/Ni 70/30
- 2 m/s for galvanized steel pipes.

D. Pumps

D 100 General

101 Displacement pumps shall be provided with relief valves. The discharge from the relief valve of pumps transferring flammable fluids shall normally be led back to the suction side of the pump.

D 200 Hydrostatic tests

- **201** Pump housings, excluding those for pumps for transfer of stored crude oil, shall be hydrostatically tested to 1.5 times the maximum working pressure. The test pressure need not exceed the maximum working pressure by more than 70 bar.
- **202** Pumps for transfer of stored crude oil shall be tested to 1.3 times the maximum working pressure, and to a minimum of 14 bar. For centrifugal pumps the maximum working pressure shall be the maximum pressure head on the head-capacity curve. For displacement pumps the maximum working pressure shall not be less than the relief valve opening pressure.
- **203** The steam side of steam-driven pumps shall be hydraulically tested to 1.5 times the steam pressure.

Hydrostatic testing of pump housings on submerged pumps will normally not be required.

D 300 Capacity tests

301 Pump capacities shall be checked with the pump running at design condition (rated speed and pressure head, viscosity, etc.).

Guidance note:

The capacity test need not be applied for pump designs where satisfactory tests have been previously performed and documented.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

- **302** The pump characteristic (head-capacity curve) shall be determined for all centrifugal pumps having capacities less than 1 000 m³/h.
- **303** For centrifugal pumps having capacities equal to or greater than 1 000 m³/h, the pump characteristic for each pump shall be determined over a suitable range on each side of the pump design point.

E. Valves

E 100 Valve design

- 101 Design shall be documented for valves of new type or unconventional design and for valves of welded construction fitted on unit or installation hull side or bottom (e.g. ship hull, pontoon).
- 102 Pressure-temperature ratings for valves shall be in accordance with a recognised standard.
- 103 Screwed-on valve bonnets shall not normally be used for valves with nominal diameter exceeding 40 mm in class I piping systems, for valves on unit or installation hull side and bottom and for valves in systems for flammable fluids.
- 104 Screwed-on valve bonnets shall be secured against loosening when the valve is operated.
- **105** Valves are normally to be closed by turning the hand wheel clockwise.
- 106 Indicators shall be provided to show the open and closed position of the valve, unless this can be observed in some other way, e.g. by a distinctly rising valve stem.
- 107 Welded necks of valve bodies shall be sufficiently long to ensure that the valves are not distorted as result of welding and subsequent heat treatment of the joints.

E 200 Operation of valves

- **201** For arrangement details see also Sec.1 A700.
- **202** For remotely controlled valves, failure in power supply (electrical, hydraulic, pneumatic) shall not cause:
- opening of closed valves
- closing of open valves on fuel oil tanks and in cooling water system for propulsion and power generating machinery.

E 300 Hydrostatic tests

- **301** All valve bodies shall be subject to a hydrostatic test, by the manufacturer, at a pressure equal to 1.5 times the nominal pressure (the nominal pressure is the maximum allowable working pressure at room temperature). The test pressure need not be more than 70 bar in excess of the nominal pressure. For valves fitted on unit or installation's side and bottom the test pressure shall not be less than 5 bar.
- **302** Butterfly valves fitted on side and bottom shall also be hydrostatically tested at a pressure equal to 5 bar applied independently on each side of the closed disc.

F. Flexible Hoses

F 100 General

- 101 Short lengths of flexible hoses may be used when necessary to permit relative movements between machinery and fixed piping systems. Hoses and couplings shall be provided of suitable design and manufacture for the purpose.
- 102 Hoses of non-metallic materials used in systems containing flammable fluids or sea water shall have at least one ply internal wire braid.
- 103 In fresh cooling water lines for diesel engines and compressors, the requirements in 101 and 102 need not apply where each engine is provided with an independent cooling system.
- 104 Rubber hoses with internal textile reinforcement fitted by means of hose clamps may be adequate in cases where the hose is a short, reasonably straight length fitted between two metallic pipes.
- 105 New types of non-metallic hoses with couplings shall be subject to a prototype test including the following:
- the bursting pressure shall be at least 4 times the maximum working pressure
- fire tests may be required for hoses intended for systems conveying flammable liquids or for use in sea water cooling systems.
- 106 For hoses of non-metallic materials, the suitability of the hose for its intended use shall be documented by means of drawings and specifications.
- **107** All hoses shall be hydrostatically tested at a hydrostatic pressure of 1.5 times the working pressure.

F 200 Installation

- **201** Flexible hoses shall be installed so that they are accessible for inspection.
- **202** Flexible hoses shall not be used in bilge and ballast systems.
- 203 Means of isolation shall be provided for flexible hoses used in systems for fuel oil, lubricating oil, sea-water cooling and compressed air.
- **204** When used in systems conveying flammable fluids flexible hoses shall be shielded from hot surfaces and other sources of ignition.

G. Detachable Pipe Connections

G 100 Flange connections

- 101 Flanges with pressure-temperature ratings in accordance with a recognised international standard are normally adequate for most design requirements.
- 102 Examples of accepted flange connections for steel piping are shown in Fig.3. Typical applications of these types of connections are given Table G1 depending upon the class of piping, media, size, pressure and temperature. Other types of flange connections may be considered on a case by case basis.

Guidance note:

For type D the pipe and flange shall be screwed with a tapered thread and the diameter of the screw portion of the pipe over the thread is not to be appreciably less than the outside diameter of the unthreaded pipe. For certain types of thread after the flange has been screwed hard home, the pipe shall be expanded into the flange.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

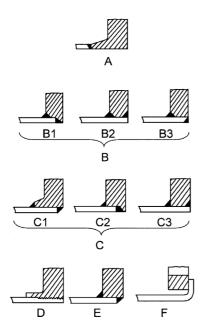


Figure 3 Types of pipe flanges

Class of nining		Steam	Lubricating and fuel oil		Other media
Class of piping	t (°C)	Typical flange application	Typical flange application	t (°C)	Typical flange application
I 1)	> 400	A	A - B	> 400	A
1 -7	≤ 400	$A - B^{(2)}$	A - B	≤ 400	A – B
II	> 250	A - B - C	A - B - C	> 250	A - B - C
II	≤ 250	A-B-C-D-E		≤ 250	A-B-C-D-E-F
III		A-B-C-D-E	A-B-C-E		A – B – C – D – E – F

G 200 Pipe couplings

201 Pipe couplings shall be used within the limitation given in Table G2.

202 Grip type joints are only to be used in readily accessible spaces. Exceptions to the above are ballast piping within ballast tanks and oil piping within oil tanks.

Guidance note:

Threaded coupling is defined as a coupling where packed threads perform the sealing.

Counting times	Classes of piping systems							
Coupling types	Class I	Class II	Class III					
Compression couplings:								
Nipple type, welded or brazed	OD _{max} 61 mm	OD _{max} 61 mm	yes					
Flared type	OD _{max} 61 mm	OD _{max} 61 mm	yes					
Bite type	OD _{max} 61 mm	OD _{max} 61 mm	yes					
Threaded couplings:								
Tapered	$OD_{max}31^{1)}$ mm	OD _{max} 31 ¹⁾ mm	$OD_{max}61 \text{ mm}^{1)}$					
Parallel	no	no	$OD_{max}61 \text{ mm}^{1)}$					
Sleeve couplings:								
Grip type ^{2), 3), 4)}	no	P _{max} 16 bart _{max} 125°C	yes					

OD = outer diameter

- Not for flammable fluids.
- Not for flammable fluids within machinery spaces of category A. 2)
- Not for bilge suction lines outside pipe tunnels. 3)
- Not in cooling water system for essential machinery.

Type B or outer diameter < 150 mm only.

G 300 Expansion joints and bellows

- **301** Where used, expansion joints and bellows shall be carefully considered for their intended use on a case by case basis.
- **302** Joints and bellows shall be designed and installed such that pulling or blowing out is prevented.
- **303** The pipeline in which the expansion joint or bellows shall be fitted shall be adequately adjusted, aligned and clamped. Where necessary, protection against mechanical damage of the expansion joints may be required.
- **304** The positions of expansion joints and bellows shall be clearly shown in the drawing of the piping systems.

H. Socket Welded Joints and Slip-on Sleeve Welded Joints

H 100 General

- 101 Socket welded joints and slip-on sleeve welded joints may be used for class I and II pipes with an outer diameter of 88.9 mm and less.
- 102 Socket welded joints and slip-on sleeve welded joints may be used for class III.
- 103 Joint designs and socket dimensions in accordance with a recognised international standard will normally be adequate.
- 104 The use of socket welded joints and slip-on sleeve welded joints in stainless steel pipes should be carefully considered on a case by case basis.
- 105 Drawings showing the locations of expansion joints and bellows shall also show the location of any pipe anchors and line-stops. (Pipe-supports that prevent and controls the axial movement of the piping connected to the expansion joints/bellows).

SECTION 3 PLATFORM PIPING SYSTEMS

A. General

A 100 Scope

- 101 The requirements of this standard have been specifically aimed at mobile offshore units and floating offshore installations of the self-elevating and column-stabilised design types, but may also be applied to other types of floating constructions as applicable.
- **102** Requirements for ship-shaped units are given in DNV Rules for Classification of Ships Pt.4 Ch.6.
- 103 The requirements in this section are applicable to piping systems for tanks and dry compartments.

A 200 Location of piping and control systems

- **201** All parts of the piping and remote control systems shall normally be kept outside the damage penetration zones, which are defined in DNV-OS-C301.
- 202 Exemptions may be considered in each case if the unit or installation can maintain the necessary ballasting capacity and acceptable stability conditions with damage to the structures and the pipes concerned, taking into account possible progressive flooding.

B. Ballast, Bilge and Drainage Systems General

B 100 Basic requirements

- 101 An efficient system to empty all tanks and watertight compartments shall be provided.
- 102 The system required by 101 shall be so arranged that tanks and compartments can be effectively emptied through at least one suction even if the unit or installation has an inclination of 5° in any direction.
- 103 In the case of dry compartments, the suctions required by 102, except where otherwise stated, may be branch bilge suctions, i.e. suctions connected to a main bilge line.
- 104 The systems shall be so designed that one single failure or maloperation of equipment will not lead to uncontrolled liquid movement, e.g. a series of tanks or a single tank shall not be filled unintentionally if that may result in a critical condition of the unit or installation.
- 105 Means shall be provided to prevent release of oily water to sea.

B 200 Ballast systems

- **201** The unit or installation shall be provided with a ballast system so arranged that any tank can be de-ballasted or ballasted by either of at least two independently driven pumps or by controlled free flow.
- **202** The capacity of each of the ballast pumps shall be sufficient to provide safe handling and operation of the unit or installation.
- **203** Ballast pumps of centrifugal type shall be self-priming, by means of an automatic vacuum priming system.

B 300 Drainage of dry compartments below main deck

301 Dry compartments below main deck on self-elevating units and below the lowest continuous deck on column-stabilised units or installations, containing essential equipment for operation and safety, or providing essential buoyancy, shall have a permanently installed bilge or drainage system.

- **302** The compartments dealt with in 301 shall be emptied with at least two independently driven bilge pumps or similar equipment. One of the pumps shall be arranged solely for bilge pumping.
- **303** Dry compartments other than machinery spaces and pump rooms may be arranged with drain pipes leading to a bilge well in the main bilge system.
- **304** Where an open drain pipe is carried through a watertight bulkhead or deck, it shall be fitted with an easily accessible self-closing valve at the bulkhead or deck, or a valve closeable from above the damage water line.
- **305** Drainage or bilge lines from chain lockers are not to be connected to the bilge pumps required in 302.
- **306** Smaller void spaces, chainlockers on self-elevating units, etc. may be emptied by portable pumps or permanently installed pumps or ejectors. When emptying by portable pumps is intended, two units shall be available onboard.

Small compartments may be emptied by suitable hand pumps.

- **307** At least two branch bilge suctions shall be provided for emptying of rooms for essential machinery, e.g. pumps and propulsion machinery. In small compartments one bilge suction may be accepted.
- **308** An emergency bilge suction shall be arranged in addition to the suctions required in 307 for pump- and engine rooms. The suction shall be connected to the largest available and suitable pump other than the bilge pumps.
- **309** Drainage of hazardous areas should be given special consideration having regard to the risk of explosion.

B 400 Drainage of dry compartments above main deck

- **401** Dry watertight compartments below damage water line may be drained by one of the following methods:
- by permanently installed bilge system
- by draining directly to sea through easily accessible closeable non-return valves
- by draining to lower compartments with adequate bilge pumping capacity.

B 500 Pumping and piping arrangement

- **501** All bilge pump connections to the bilge lines shall be fitted with screw-down non-return valves.
- **502** The bilge pumps shall be so arranged that one can be used while the other is being overhauled.
- 503 Centrifugal bilge pumps shall be located as low as possible in the unit or installation and be of the self-priming type.

Guidance note:

It is advised that at least one of the bilge pumps is of the reciprocating type. Large centrifugal pumps should preferably not be used as bilge pumps.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

- **504** Where pumps, necessary for propulsion, cooling of power generating plant or ballasting, are connected to a common suction or discharge chest or other piping, the arrangement shall be such that the functioning of any pump is not affected by other pumps in operation at the same time.
- **505** The arrangement shall be such that no sea water can unintentionally enter dry compartments or pass from one compartment to another.

The following requirements shall be complied with:

- a) Two non-return valves in series shall be installed between sea or ballast system and bilge suctions in compartments.
- b) For emergency bilge suctions one non-return valve between sea or ballast system and the suction will be acceptable.
- Bilge distribution chest valves shall be screw-down nonreturn valves.
- d) All bilge suctions not leading to a bilge distribution chest shall be fitted with screw-down non-return valves.
- e) Bilge pipes through deep tanks, see 605.

506 Remotely controlled valves in bilge suction lines shall be screw-down non-return valves or shut-off and non-return valves connected in series.

B 600 Bilge pipes

601 The internal diameter of bilge suctions from each compartment shall not be less than given by the following formula, to the nearest 5 mm:

$$d = 2.15\sqrt{A} + 25$$
 (mm)

where A is wetted surface in m² of the compartment when the compartment is half way filled with water. The internal diameter of any bilge line is not to be less than 50 mm. For irregularly shaped compartments A will be specially considered.

- **602** The cross-sectional area of the main bilge lines is not to be less than the combined area of the two largest branch suctions
- **603** Direct bilge suctions are to have an internal diameter of not less than 1.4 d but need not exceed the diameter of the main bilge lines.
- 604 The diameter of emergency bilge suction is not to be less than that of the suction side of the pump, but need not exceed 400 mm.
- **605** Bilge suction pipes are, as far as practicable, not to be carried through double bottom tanks. Where this cannot be avoided, the pipe wall thickness shall be as given in Sec.2 Table C2, column 4.
- 606 In deep tanks used for water ballast or fuel oil the bilge pipes shall be led through pipe tunnels or made of steel with a wall thickness according to Sec.2 Table C2. If possible they should consist of a single pipe length or be welded together. Expansion bends or approved expansion bellows shall be fitted to the bilge pipes within the tanks. The open ends of these suction pipes in the dry compartments shall be provided with non-return valves.
- **607** The pipes shall be installed in convenient lengths in such a way that they may easily be dismantled for cleaning and repair.

B 700 Bilge pumps

- **701** Each pump unit may consist of one or more pumps connected to the main bilge line, provided their combined capacity is sufficiently large.
- **702** One of the bilge pumps may be a bilge ejector, provided that there is a separate pump delivering sufficient water for operating the ejector.
- **703** The capacity of each of the bilge pumps shall be sufficiently large to give the water, under ordinary working conditions, a velocity of at least 2 m/s through pipes of dimensions as given in 600.
- 704 Where the capacity of one pump is somewhat less than required, the deficiency may be made up for by the other pump. The capacity of the smaller pump, however, is not to be less than one third of the combined pumping capacity.

705 Pump capacity as a function of required pipe diameter is given in Table B1.

Table B1 Pipe d	liameter and cor	responding bilge	pump capacity
Bore of bilge	Capacity of	Bore of bilge	Capacity of
pipe	each pump (m ³ /	pipe	each pump (m ³ /
(mm)	hour)	(mm)	hour)
50	15	90	47
55	18	95	52
60	21	100	58
65	25	105	64
70	29	110	70
75	33	115	76
80	37	120	83
85	42	125	90

The pump capacity Q in m³/hour may be determined from the formula:

$$Q = \frac{5.75 \text{ d}^2}{10^3}$$

d = bore of bilge pipe in mm according to 600

706 Where large centrifugal pumps are arranged for suction, the pump characteristics together with calculations of the pressure losses in the pipe system shall be submitted for approval in those cases where the water velocity in the main bilge line will exceed 5 m/s. Arrangement plans of systems for air evacuation, cooling of bearings, etc. shall be documented.

B 800 Bilge wells, mud boxes, valves etc.

- **801** Bilge pipes for drainage of machinery spaces, pump rooms and shaft or pipe tunnels shall be led to mud boxes. The mud boxes shall have straight tail pipes to the bilges and shall be arranged for easy inspection and cleaning. Strums or rose boxes are not to be fitted to the lower end of these pipes or to direct or emergency bilge suctions.
- **802** Strums or rose boxes shall be fitted to the ends of bilge suction pipes in compartments intended for storage of supplies, and arranged for easy inspection and cleaning. The open area shall be at least twice the internal sectional area of the pipe. The diameter of the holes shall be approximately 10 mm.
- **803** The distance between the open ends of the bilge suction pipes and the bottom of the bilge or wells shall be adequate to allow a full flow of water and to facilitate cleaning.
- 804 Valves, cocks and mud boxes shall be located in readily accessible positions above or on the same level as the floor plates. Where this is not practicable, they may be placed immediately below, provided that the floor plates in question can be easily removed and are fitted with a name plate which indicates the presence of these fittings.

C. Ballast and Bilge Systems for Columnstabilised Units and Installations

C 100 General

- 101 The general requirements in B shall be complied with, unless otherwise specified in C.
- 102 The ballast system is to provide the capability to bring the unit or installation, while in an intact condition, from the maximum normal operating draught to a severe storm draught, within 3 hours.

C 200 Remote control and monitoring

201 A central ballast control station shall be provided. It shall be located above the damage waterline and in a space not within the assumed extent of damage referred to in DNV-OS-C301 and adequately protected from weather. It shall be pro-

vided with the following control and indicating systems where applicable:

- bilge and ballast pump control system
- pump status-indicating system
- valve control system
- valve position-indicating system
- tank level indicating system
- draught indicating system
- heel and trim indicators
- power availability indicating system (main and emergency)
- hydraulic or pneumatic pressure-indicating system
- monitoring systems, e.g. machinery alarm, fire and gas detection system etc.
- 202 In addition to remote control of the ballast pumps and valves from the central ballast control station, all ballast pumps and valves shall be fitted with independent local control operable in the event of remote control failure. The independent local control of each ballast pump and of its associated ballast tank valves shall be in the same location.
- **203** The control and indicating systems required in 201 and 202 shall function independently of each other, or have sufficient redundancy, such that a failure in one system does not jeopardize the operation of any of the other systems.
- **204** The valves in the ballast system shall be of the self-closing type or operated by a system with stored energy for closing of the valves during emergency conditions.
- **205** The remote control system for ballast and bilge valves shall be arranged with power supply from both main- and emergency switchboards.
- **206** Short circuit of one electrically remote operated valve shall not inhibit the function of other valves.

Guidance note:

It is advised to arrange separate fusing in each valve control circuit.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

207 Commands given from the remote control panel shall be clearly indicated.

C 300 Ballast system

- **301** The ballast system shall be capable of operating after the damage condition as specified in IMO MODU Code (3.5.10) and have capability of restoring the unit or installation to a level trim and safe draught condition without taking additional ballast and with any one pump inoperable. Counterflooding may be considered as an operational procedure.
- **302** The sea water inlets to the ballast system are normally to be separated from other systems. A common ballast and sea water cooling system may be accepted upon special consideration.
- **303** The ballast system should be arranged and operated so as to prevent inadvertent transfer of ballast water from one tank or hull to another, which could result in moment shifts leading to excessive angles of heel or trim.
- **304** For filling of ballast system by *free flooding* (see DNV-OS-C103 Sec.3 D300), the following criteria apply in connection with tank filling arrangement:
- all pump filling connections to the tank are physically disconnected (blank installed)
- filling directly down the venting pipe is not permitted in normal operational conditions
- the method of hydrostatic testing shall be in accordance with DNV-OS-C401 Ch.2 Sec.4 C100.

- **305** For filling with pumps with *tank level alarms installed* (see DNV-OS-C103 Sec.3 D300), the following criteria normally apply in connection with tank filling arrangement:
- the system with the tank level alarms is installed as the only means of ballasting the tanks; direct filling above a given level (h_{op2}) is not to be physically possible
- in order to avoid dynamic load effects from filling, the following shall be installed:
 - high level alarms
 - high, high level alarms
 - auto-pump cut off at high, high level or ESD closure of inlet valve
- filling directly down the venting pipe is not permitted in normal operational conditions
- the method of hydrostatic testing shall be in accordance with DNV-OS-C401 Ch.2 Sec.4 C100.

C 400 Bilge system

- **401** The bilge system shall be so arranged that essential rooms in lower hulls, e.g. pump rooms, can be emptied even in flooded condition. The control and position-indication systems for the bilge valves shall be designed to operate even if the equipment should become submerged.
- **402** Propulsion rooms and pump rooms in lower hulls which are normally unattended, shall be provided with two independent high level bilge alarms.

D. Ballast and Bilge Systems for Self-elevating Units and Installations

D 100 General

- 101 The general requirements in B shall be complied with, unless otherwise specified in D.
- 102 The unit or installation shall be provided with means for emptying of engine rooms and watertight compartments and tanks which provide essential buoyancy.

D 200 Pre-load system

201 Alternative methods for drainage of pre-load tanks, e.g. by means of bottom valves, may be accepted upon special consideration.

D 300 Bilge system

301 The unit or installation shall be equipped with 100% redundancy in bilge pumping system and means for draining all compartments and watertight sections.

Compartments containing liquids such as cooling water, oil fuel or stored produced liquid are to have their own separate pumping system.

302 A graphic panel showing all components and arrangements of bilge and drainage system shall be suitably positioned at the bilge pumping station.

E. Ballast and Bilge Systems for Ship-shaped Units and Installations

E 100 General

101 Requirements for ship-shaped units are given in DNV Rules for Classification of Ships Pt.4 Ch.6.

F. Air, Overflow and Sounding Pipes

F 100 Arrangement of air pipes

101 Air pipes shall be fitted to all tanks, cofferdams and pipe tunnels. For small dry compartments without piping installations the requirement for fitting air pipes may be waived.

102 Air pipes are not to be fitted with valves that may impair the venting function.

Tank air pipes shall be placed at the highest part of the tank and as far away as possible from the filling pipes.

Where the tank top is unusual or of irregular profile or of great length, the number and positions of the air pipes shall be decided in each case. For tanks with width exceeding half of the unit's or installation's beam, air pipes on each side may be required. Pipe tunnels of great length shall be fitted with air pipes in the fore and after ends.

103 Air pipes from tanks which can be filled from the sea and from sea chests shall be carried up to above the freeboard deck.

104 Air pipes from fuel oil and lubricating oil tanks, double bottom tanks, cofferdams and all other tanks which can be pumped up and to pipe tunnels, shall be carried above the free-board deck and led to open air.

Air pipes from fuel oil daily service tanks are to terminate at positions sufficiently high to avoid the possibility of ingress of seawater

The height is at least to satisfy the requirements in the International Convention on Load Lines (ICLL) for ventilation openings not required to be fitted with closing arrangements (see DNV-OS-C301). The air pipes shall be so located that risk of damage from sea or loose objects is avoided.

105 Air pipes from lubricating oil tanks and fuel oil draining tanks with a volume less than 2 m³ and which cannot be pumped up, may terminate in the engine room.

106 For height of air pipes above deck, see DNV-OS-C301.

107 The ends of the air pipes shall be so designed or so located that ingress of water is prevented. Automatic vent heads with ball floats or similar devices shall be of approved design.

108 Tanks where anodes for cathodic protection are installed, shall have air pipes fitted forward and aft.

109 Alternatively a single air pipe may be accepted if it is fitted with fine-meshed wire gauze easily removable for cleaning or renewal. The wire gauze shall be placed near to the outlet, and the area of the pipe end opening shall be enlarged to twice the pipe cross section. The open ends shall be situated in positions where no danger will occur as a consequence of escaping oil vapour or gas.

Guidance note:

In cold climatic conditions the possibility of freezing of vents should be taken into account

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

110 Where only one air pipe is fitted, it is not to be used as a filling pipe.

111 All air pipes shall be clearly marked at the upper end.

112 Air pipes shall be self draining under normal conditions of trim.

113 Air pipes shall not be used as primary means for sounding.

F 200 Air pipes, sectional area

201 For tanks which can be pumped up and for which overflow pipes are not arranged, the sectional area of air pipes shall be dimensioned such that the structure is able to withstand the

pressure when the tank is over pumped with the largest available pump

Alternatively, arrangements for prevention of over pumping of tanks may be accepted, Ref also C305.

The sectional area of the air pipes is in no case to be taken less than 125% of the sectional area of the filling pipe.

Guidance note:

Automatic stop of ballast pumps or automatic closing of valve in the ballast filling line may be accepted as arrangement for prevention of over pumping of tanks. Such means shall be activated by a remote level gauging system or equivalent. In addition an independent visual and audible high level or high-pressure alarm will be required. The alarm shall be activated prior to stop of pumps or closing of valve. Arrangements for functional testing of the automatic stop or closing and alarm systems shall be provided. Ref also C305.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

202 For tanks which can be filled by pumps not installed in the vessel, the maximum allowable pump capacity shall be stated on signboards at the filling pipe connection.

203 Short air pipes for tanks which can be filled by pumping, e.g. tanks in barges and self-elevating units, are to have a sectional area at least 25% greater than the effective sectional area of the filling pipes. The velocity of the liquid flow in the air pipe is not to exceed 4 m/s when the tank is pumped over with the largest pump available.

204 Air pipes from ballast tanks filled by free flooding only, may have less air pipe area, but in no cases less than 25% of the sectional area of filling pipe.

205 Air pipes are to have an internal diameter not less than 50 mm.

Where overflow pipes are fitted as specified in 300 the sectional area of the air pipes shall be at least 20% of that of the filling pipes.

When an air pipe serves several tanks all having overflow pipes as specified in 300 the sectional area of the air pipe shall be at least 20% of the combined area of the two largest filling pipes for the separate tanks.

206 Pipe tunnels shall be fitted with an air pipe with an internal diameter not less than 75 mm.

207 Rooms fitted with emergency bilge suction according to B308 shall be fitted with air pipe and vent heads of sufficient size to ensure efficient ventilation during an emergency bilge operation. The vents shall be designed to accommodate the maximum pumping rate of emergency bilging.

F 300 Overflow pipes, arrangement

301 Fuel oil and lubricating oil tanks which can be pumped up and which have openings, for example, for a float sounding system, shall be fitted with overflow pipes discharging to an overflow tank or bunker oil tank with surplus capacity. The tank openings shall be situated above the highest point of the overflow piping.

302 The overflow tanks are to have a capacity large enough to take an overflow of ten minutes at the normal rate of filling.

303 The overflow system shall be fitted with an alarm device or a sight glass, easily visible from the place where the transfer pump can be stopped.

304 Where tanks for the carriage of oil or water ballast are connected to an overflow system, the pipe arrangement shall be such that water ballast cannot overflow into tanks containing oil.

305 The overflow system shall be so arranged that water from the sea cannot enter through the overflow main line into other tanks in case of any tanks being damaged.

Guidance note:

This requirement applies if any fuel tank or overflow tank connected to a common overflow line or air vent tank is bounded by bottom or side plating below the waterline.

In such cases the common overflow line or air vent tank must be located higher than the deepest waterline, alternatively individual tank overflow lines must be arranged with loops extending above the waterline.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

306 The overflow pipes shall be self draining under normal conditions of trim.

F 400 Overflow pipes, sectional area

401 The sectional area of overflow pipes shall be at least 25% greater than the area of the filling pipes.

F 500 Sounding arrangements

- **501** Indication of liquid level in the ballast tanks, draught and inclination of the unit or installation shall be provided for safe operation of the ballasting system.
- **502** For column-stabilised units or installations the indications in 501 shall be provided in the centralised control room.
- 503 Remote sounding systems shall be designed to withstand possible overload, e.g. from overfilling the tanks.

The number and position of measuring points shall be arranged to correct for the influence of inclination, as far as possible.

- 504 All tanks, cofferdams and pipe tunnels shall be provided with sounding pipes or other approved means for ascertaining the level of liquid in the tanks. Spaces which are not always accessible, shall be provided with sounding pipes.
- 505 The sounding pipes shall be readily accessible at any time and clearly marked.

Sounding pipes are normally to be led to the upper deck. Sounding pipes from fuel oil tanks, lubricating oil tanks and other tanks containing flammable liquids, and which can be pumped up, shall be led to the open air.

Sounding pipes to tanks containing liquids which have a flash point below 60°C (closed cup), are always to be led to the open air. Sounding rods of such tanks shall be of spark proof material and no gauge glasses shall be fitted to these tanks if located in machinery spaces.

The sounding pipes shall be fitted with efficient closing appliances.

506 Short sounding pipes may be fitted to double bottom tanks, in shaft tunnels and machinery spaces provided the pipes are readily accessible.

Sounding pipes for fuel oil and lubricating oil tanks shall not be placed in the vicinity of boilers, or preheaters, heated pipes, electric generators or motors with commutator or collector rings, or electric appliances which are not totally enclosed. The sounding pipes shall be arranged in such a way that overflow or oil spray will not reach any machinery component mentioned above. The sounding pipes shall be fitted with self-closing cocks having cylindrical plugs with weight-loaded levers permanently attached. Short sounding pipes to tanks not intended for oil shall be fitted with a screw cap attached by chain to the pipe or with shutoff cocks.

507 If oil gauges of glass are used for ascertaining the level of oil in storage, settling or daily service tanks for fuel and lubricating oil, the glasses shall be of heat-resisting material, suitably protected and fitted with self-closing cocks at the lower ends and also at the top ends, if the connections to the tanks are below the maximum oil level. The gauges shall be adequately supported.

508 Striking plates with a minimum thickness of 15 mm or a similar arrangement shall be fitted under sounding pipes in

order to absorb the impact of the sounding rod.

Where sounding pipes terminate in a bend, the bend shall be adequately fastened and supported and of sufficient thickness for taking the wear from the sounding rod. Such sounding pipes, however, are not to be used for deep tanks, unless they are situated within closed cofferdams or within tanks containing similar liquids.

- **509** Remote sounding system may replace ordinary sounding pipes or gauges as follows:
- For tanks easily accessible for checking of level through, for example, manholes, one remote sounding system may be accepted.
- b) For tanks which are not always accessible for checking of level, two independent remote sounding systems are required. In the case of remote sounding based on the airbubble principle, two air-bubble lines per tank may be accepted provided sufficient redundancy in the central unit is provided.
- **510** Means shall be provided for sounding and draining of water-tight structural members such as bracings of column-stabilised units/installations.

F 600 Sounding pipes, sectional area

- **601** The internal diameter of sounding pipes shall not be less than 32 mm.
- **602** Where a sounding pipe exceeds 20 m in length, the internal diameter shall not be less than 50 mm.

G. Storage and Transfer Systems for Liquids with Flashpoint below 60°C (e.g. Helicopter Fuel)

G 100 General

101 Tanks and pipe systems for such liquids shall be in accordance with relevant requirements given elsewhere in this standard.

G 200 Arrangement

- **201** Storage tanks should be located as far as practicable from the accommodation area, escape ways, and embarkation stations for evacuation.
- **202** Tanks and associated equipment should be protected from physical damage (e.g. from dropped objects where this is possible) and from a fire in an adjacent area.
- **203** Rooms where tanks and equipment for handling of such liquids are located, shall be regarded as hazardous areas, Zone 2. The rooms shall be effectively ventilated.
- **204** The air pipes to the tanks shall be provided with pressure/vacuum relief valves. The valves shall be of sufficient capacity to relieve the overpressure-vacuum which occurs during filling or emptying at maximum rate.
- **205** For tanks on open deck, permanently installed and arranged for filling, the area 1.5 m from the pressure/vacuum (P/V) valve shall be regarded as hazardous area Zone 2. For transportable tanks (i.e. not refilled onboard but replaced by full tanks), P/V valves are only for breathing purposes (small gas quantities) and no hazardous area will be designated around the P/V valves.
- **206** The fuel storage area shall be arranged with means by which spillage can be collected and drained to a safe location.
- **207** Storage tank pumps shall be provided with means which permit shutdown from a safe remote location in the event of a fire. Where a gravity fed fuelling system is installed, equivalent closing arrangements shall be provided.

- **208** Fuel pumping shall incorporate a device which will prevent over pressurisation of the delivery filling hose.
- **209** Corrosion resistant material, lining or coating may be required in the tanks and piping systems in order to ensure proper fuel cleanliness.
- **210** Gauge glasses with self-closing cocks for level indication can be accepted for such tanks located outside of engine rooms or other safe areas.
- 211 Fuel transfer system for helicopter refuelling shall be earthed.

SECTION 4 MACHINERY PIPING SYSTEM

A. General

A 100 Redundancy and capacity

101 Redundancy shall be arranged as specified in Sec.1 B300. Redundancy capacity of components shall be as specified in the requirements for the different systems.

Applied to piping systems this implies that more than one pump unit shall be installed when failure of such a unit will result in loss of a main function.

The capacity shall normally be sufficient to cover demands at maximum continuous load on the main function when any pump unit is out of service.

Guidance note:

Main functions for all types of mobile units and floating installations include:

- power generation
- fire protection, detection and extinction
- drainage and bilge pumping
- ballasting
- anchoring and mooring / position keeping.

For self-propelled mobile offshore units propulsion and steering are also regarded as a main function.

For fixed installations main functions will include:

- power generation
- fire protection, detection and extinction.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

B. Cooling Systems

B 100 General

- 101 Centrifugal sea-water cooling pumps shall be installed as low as possible in the unit or installation or other means shall be provided to prevent, as far as practicable, that the pumps lose water in a seaway.
- 102 When generator prime movers are connected to a common water cooling system, the arrangement shall be such that the supply of cooling water to the prime movers will not be affected by damage and leakage in other parts of the system.

Guidance note:

It is recommended that water cooling for generator prime movers is separated from water cooling systems for other purposes.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

103 Cooling systems in self-elevating units or installations shall be so arranged that the supply of cooling water to the generator prime movers will not be affected, even if the fire pumps are in operation, during raising and lowering of the installation. In such events the cooling water may be supplied from a storage tank.

B 200 Sea inlets for cooling water pumps

- **201** Sea-water cooling systems for the machinery shall be connected to at least two cooling water inlets.
- 202 Strums shall be fitted to all sea chest openings in the shell plating. The total area of the strum holes shall be at least twice the total flow area in the sea water inlet valves.
- 203 Where sea water is used for cooling the main engines or auxiliary engines, the cooling water and suction lines shall be provided with strainers which can be cleaned without interrupting the cooling water supply.

C. Lubricating Oil System

C 100 General

- 101 Lubricating oil systems shall be separated from other systems. This requirement does not apply to hydraulic governing and manoeuvring systems for main and auxiliary engines.
- 102 Lubricating oil tanks shall be either stand alone tanks or isolated from other tanks by cofferdams in order to prevent possible contamination of the oil.

C 200 Lubricating oil pre-treatment arrangement

- **201** For systems where the lubricating oil circulates under pressure, efficient filtering shall be provided.
- **202** For non-redundant units, it shall be possible to clean the filters without interrupting the oil supply.

If automatic cleaning filters are used, a bypass shall be arranged.

203 For diesel engines burning residual oil fuel, cleaning of the lubrication oil by means of purifiers shall be arranged. These means are additional to the filters required in 201.

C 300 Lubricating oil supply

301 Each engine or turbine shall be supplied with at least one lubricating oil pump of sufficient capacity for the maximum output of the engine.

C 400 Remote shut-off arrangement for lubricating oil tanks

401 Valves on lubricating oil tanks situated above the double bottom and which are open during normal service shall be arranged for remote shut-off if such valves are located below top of the tank or overflow outlet.

Based on case by case consideration, this requirement may be waived for small tanks, with volume less than 0.5 m³, and tanks for which an unintended closing of the valves may result in loss of main functions specified in A.

D. Fuel Oil System

D 100 Flash point of fuel oil

- 101 Oil fuels with a flash point of less than 60°C (closed cup) are normally not permitted.
- 102 Units or installations intended for service within areas having climate ensuring that ambient temperatures of spaces where such fuel oil is stored will not rise to temperatures within 10°C below the flash point of the fuel, may use fuel oil with flash point below 60°C but not less than 43°C.
- 103 Liquids for specific purposes and whose flash point is lower than 43°C shall preferably be stored outside the machinery space. If tanks for such liquids are installed in the engine room, this shall be specifically evaluated and documented.
- 104 Fuel oil storage tanks shall not be heated to temperatures within 10°C below the flash point of the fuel oil, except as given in 105.
- 105 Fuel oil in service tanks, settling tanks and any other tanks in the supply system may be heated above the limit given in 104 provided:
- the length of vent pipes from such tanks and/or a cooling device is sufficient for cooling the vapours to at least 10°C

- below the flash point of the fuel oil
- a temperature sensor is fitted in the vent pipe and adjusted to give alarm if the temperature should exceed a limit set at 10°C below the flash point of the fuel
- the vent pipes are fitted with flame screens meeting the requirements of IMO's Standards for Devices for Preventing Passage of Flames into Cargo Tanks
- there are no openings from the vapour space of the fuel tanks into machinery spaces
- enclosed spaces shall not be located directly over such fuel tanks, except for well-ventilated cofferdams
- electrical equipment shall not be fitted in the vapour space of the tanks, unless it is certified intrinsically safe.

D 200 Fuel oil tanks

- 201 Two fuel oil service tanks for each type of fuel used on board necessary for propulsion and vital systems or equivalent arrangements shall be provided. Each tank shall have a capacity sufficient for continuous rating of the propulsion plant and normal operating load at sea of the generator plant for a period of not less than 8 hours.
- **202** Fuel oil tanks shall be separated from fresh water tanks and lubricating oil tanks by means of cofferdams.
- 203 Where fuel oil tanks are situated near to boilers or other hot surfaces, the tanks shall be well insulated. In order to keep the oil temperature well below the flash point, care shall be taken that the free air circulation is not impeded.
- 204 The plate thickness in free standing fuel oil tanks shall not be less than 5 mm. For very small tanks the plate thickness may be reduced to 3 mm. Sides and bottom of the tanks shall be well stiffened. Large tanks shall be fitted with wash bulkheads
- **205** Fuel oil daily service tanks for heavy fuel oil shall be constructed with smooth bottoms with slope towards drainage outlet. Outlets for fuel oil centrifuges, if fitted, shall be taken from the lowest point of the tank bottom.

D 300 Fuel oil piping

- **301** Piping conveying flammable liquids under pressure in the engine room and boiler room shall be laid in well lit places, in order that the piping can be kept under observation.
- **302** All detachable pipe connections and valves in oil fuel pressure piping shall be at a safe distance from boilers, exhaust pipes or other heated surfaces and electrical appliances.
- **303** The number of detachable pipe connections shall be limited to those which are necessary for mounting and dismantling.
- **304** Fuel oil pipes are not to be routed through fresh water tanks.
- **305** The arrangement of piping and valves shall be such that oil cannot enter tanks not intended for this purpose.

D 400 Arrangement of valves and fittings

401 The inlet and outlet pipes which are connected to the fuel oil tank at a point lower than the outlet of the overflow pipe, or below the top of tanks without an overflow pipe, shall be fitted with shut-off valves located on the tank itself.

However, short distance pieces of rigid construction may be accepted, the length of which is not to exceed 1.5 D of the pipe.

Guidance note:

For filling lines entering at the top of a tank and with inside extension towards the bottom, air holes must be drilled in the pipe near the penetration in order to avoid the siphoning effect.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

402 All valves and cocks on oil tanks shall be mounted and protected in such a way that they cannot be damaged as the

result of an accident. The positioning of valves shall be such that any possible leakage will not lead to oil spray on boilers, exhaust pipes or other hot surfaces of the machinery, or on electric motors and appliances.

- **403** Oil piping led through engine room bulkheads, shall be fitted with shut-off valves in the engine room. The valves shall be fitted on the bulkhead, or nearby.
- **404** All valves in the fuel oil system shall be controllable from positions above the floor plates.
- **405** If oil gauges of glass are used for ascertaining the level of oil in storage, settling, or daily service tanks for fuel oil or lubricating oil, the glasses shall be of heat resisting material, suitably protected and fitted with self-closing cocks at the lower and upper ends, if the connections to the tanks are below the maximum oil level. The gauges shall be adequately supported.

D 500 Remotely controlled shut-off arrangement for fuel oil tanks

501 All valves mentioned in 401 shall be arranged for remote shut-off if they are in open position during service. This is not applicable for valves on tanks less than 0.5 m^3 .

The operation shall be carried out from a central position outside the engine room and at a safe distance from skylights and other openings to engine and boiler room.

For filling valves on the tanks remote shut-off may be omitted if non-return valves are used.

The controls for remote shut-off for emergency generator and emergency fire pump shall be located separately from the controls of the other valves in order to avoid erroneous operation.

- **502** The arrangement shall be such that paint, corrosion etc. will not impair the efficiency of the remote operation of the valves.
- **503** Hydraulic or pneumatic systems shall not be used as means for keeping quick-acting shut-off valves in open position

D 600 Fuel oil pre-heaters

601 For requirements for electric oil heaters, see Rules for Classification of Ships Pt.4 Ch.8.

D 700 Fuel oil pre-treatment arrangement

- **701** Filters shall be fitted in the supply lines to the main and auxiliary machinery. These shall be arranged in such a way that they can be cleaned without interrupting the supply of fuel oil.
- **702** For auxiliary engines one single fuel oil filter for each engine may be accepted.
- 703 Fuel supply for diesel engines burning residual oil fuel (heavy fuel) or mixtures containing such oils shall be provided with suitable means for removal of harmful contaminants. These means are additional to the filters required in 701. If centrifuges are used for the above purpose the arrangement is to have adequate built-in redundancy.

D 800 Drip trays

- **801** All oil tanks in machinery spaces shall be equipped with drip trays of sufficient capacity and height for collecting any leakage of oil which may occur from valves, fittings etc. The drip trays shall be drained to a closed waste tank not forming part of an overflow system.
- **802** Precautions shall be taken against overflow of oil from the lowest situated drip trays.
- **803** Drip trays shall be fitted under those parts of the fuel oil system which are often opened up for cleaning such as burners, purifiers, filters, etc.

D 900 Remote stop of fuel oil pumps and fans

- **901** Emergency stop of the power supply to the following pumps and fans shall be arranged from a central place outside the engine and boiler room:
- fuel oil transfer pumps
- fuel oil booster pumps
- nozzles cooling pumps when fuel oil is used as coolant
- fuel oil purifiers
- pumps for oil-burning installations
- fans for forced draught to boilers
- fans for ventilation of engine and boiler rooms
- thermal oil circulation pumps
- hydraulic oil pumps.

D 1000 Oil filters

1001 Duplex filters used in systems for flammable liquids shall be arranged with means for preventing unintended opening of a filter under pressure.

D 1100 Various requirements

- 1101 Settling tanks and daily service tanks shall be fitted with means for draining of water from the bottom of the tanks.
- 1102 Open drains for removing water from oil tanks shall be fitted with self-closing valves or cocks, and means shall be provided for collecting all waste oil in closed tanks. For oil tanks, with capacity above 10 m³, a stop valve shall be fitted between the self-closing valve and the tank.
- 1103 The oil burners shall be so arranged that they cannot be withdrawn unless the oil supply to the burners is cut off.

E. Thermal Oil Systems

E 100 System arrangements

101 Thermal oil systems shall be arranged and installed in accordance with requirements given in the Rules for Classification of Ships Pt.4 Ch.7.

F. Feed Water and Condensation Systems

F 100 Feed water pumps and piping

- 101 Feed water pumps installed to meet the requirements for redundancy shall be independently driven.
- 102 If feed water pre-heaters are fitted in feed water lines bypass arrangements shall be provided enabling repair of a heater without interrupting the feed water supply.
- 103 Feed water piping shall be fitted with valves at the boiler inlet, as stated in the Rules for Classification of Ships Pt.4 Ch.7 Sec. 6.

F 200 Feed water heating

- **201** For steam boilers with working pressure above 7 bar arrangements for preheating and deaeration of the feed-water before entering the boiler shall be provided.
- 202 The preheating arrangement shall be capable of maintaining the temperature above 80°C when boilers are operated at maximum load during normal service.

F 300 Feed water tanks

- **301** Reserve feed water tanks shall be provided, with a capacity corresponding to at least twice the hourly evaporation rate of the main boilers.
- **302** Feed water tanks shall be separated from oil tanks by cofferdams.

303 Piping for feed tanks shall be so arranged so that the water cannot be contaminated by oil or oily water.

F 400 Condensate from steam heating of tanks

401 Where fuel or lubricating oil tanks, heaters or purifiers are heated by steam in pipe coils, the condensate shall be led into an observation tank. This tank shall be placed in an easily accessible, well ventilated and well illuminated position where it can easily be observed whether the condensate is free from oil or not.

G. Steam Systems

G 100 Steam piping

- 101 Water pockets in the steam flow lines shall be avoided as far as practicable in order to prevent water hammer in the system. If this cannot be avoided, drain cocks or valves shall be fitted in such places so that the pipes may be efficiently drained while in operation.
- 102 Non-insulated steam pipes shall not be led through spaces or tanks without satisfactory possibilities for removal of the heat.

G 200 Shut-off valves

- 201 If two or more boilers are connected to a common header or steam manifold the steam connection to each boiler shall be provided with two shut-off valves with a free blowing drain in between. This requirement does not apply to exhaust gas economisers with forced circulation.
- 202 Where blow-downs from two or more boilers are connected to a common discharge, two valves shall be fitted to each discharge.

G 300 Safety valves

301 The discharge from safety valves shall be to a point where hazard is not created, see the Rules for Classification of Ships Pt.4 Ch.7 Sec.6.

H. Hydraulic Systems

H 100 General

- **101** The redundancy requirement in A101 applies to pumps, filters and pressure reduction units.
- **102** Hydraulic systems shall be separated from other piping systems except lubricating oil systems as specified in C101.
- 103 The hydraulic fluid shall not corrode or attack chemically the components in the system. It shall have a flash point not lower than 150°C and shall be suitable for operation at all temperatures to which the system may normally be subjected.
- **104** Means for filtration and cooling of the fluid and for deflation of entrapped gases shall be incorporated in the system where identified as necessary.
- 105 Excessive pressure surges and pulses generated by pumps and valve operations shall be avoided. When necessary, pulsation dampers shall be fitted and shall preferably be connected directly to the source of vibrations. Design of the system shall normally be such that laminar flow is obtained.
- 106 Detachable pipe connections and valves in hydraulic pressure piping shall be at a safe distance from electrical appliances, boilers, exhaust pipes and other sources of ignition.
- 107 Air pipes from hydraulic oil circulation tanks and expansion tanks shall be lead to safe locations so that any escaping oil does not reach possible sources of ignition.
- 108 Oil circulation tanks or expansion tanks in engine rooms

shall be provided with arrangements preventing overflow of oil (e.g. from generation of vapour due to moisture in the hydraulic oil). The following alternative arrangements are acceptable:

- a) The free volume of the circulation tanks is sufficient for accumulating all the hydraulic oil in the system. A high level alarm is fitted in the tank at a level leaving sufficient free volume for containing the oil in the system.
- b) The circulation tank or expansion tank is provided with an overflow pipe leading to a collecting tank. The cross sectional area of the overflow pipe is twice that of the return oil pipe.
- c) The air pipe from the tank is lead to a safe position outside machinery space. The cross sectional area of the air pipe is twice that of the return oil pipe.

H 200 Hydraulic power supply

- **201** Requirements for hydraulic power supply to steering gears are given in the Rules for Classification of Ships Pt.4 Ch.14.
- **202** Anchor windlasses may be fitted with one power unit provided the anchor(s) can be lowered independent of the hydraulic system.
- **203** Windlasses arranged for remote control shall have additional arrangement for local manual control.

H 300 Hydraulic cylinders

301 Hydraulic cylinders shall normally be designed with a safety factor of at least four against buckling, using the following simplified formula:

$$P = \frac{E\pi^2}{1000LZs} \quad (kN)$$

$$Z = \frac{L_1}{I_1} + \frac{L_2}{I_2} + \left(\frac{1}{I_2} - \frac{1}{I_1}\right) \frac{L}{2\pi} \sin\left(2\pi \frac{L_1}{L}\right)$$

P = maximum axial load (kN)

s = safety factor = 4.0

I₁ = moment of inertia of cylinder tube cross section, (mm⁴)

 I_2 = moment of inertia of piston rod cross section (mm⁴)

L = maximum length of hydraulic cylinder from centre to centre of end eyes (mm)

 L_1 = cylinder tube length from end eye (mm)

L₂ = piston rod length from centre of rod end eye (mm)

E = modulus of elasticity of the piston rod material

 $= 2.06 \times 10^5 \text{ N/mm}^2 \text{ for steel.}$

302 A lower buckling safety factor than 4.0 may be accepted for more accurately validated calculation methods. Relevant parameters to be included in such a method are:

- yield strength of piston rod material
- bending moments caused by the rotation of the bearings
- guiding length
- clearance between gland and piston rod
- actual deflection curve.

(Acceptable safety factor shall normally not be less than 2.7.)

Guidance note:

Concerning buckling calculations of hydraulic cylinders for cranes, see the DNV Standard for Certification No. 2.22 Lifting Appliances.

303 For piston rods with diameter less than 5% of the length between the mountings in fully extracted position, buckling calculations shall be documented.

H 400 Accumulators

401 Hydraulic accumulators of the gas or hydraulic fluid type having

p = design pressure in bar

 $V = \text{volume in } m^3$

shall comply with the Rules for Classification of Ships Pt.4 Ch.7, while requirements for smaller accumulators are as for piping.

- **402** For hydraulic accumulators of the gas or hydraulic fluid type the two media shall be suitably separated if their mixture can be dangerous or result in the contamination of the hydraulic fluid and/or loss of gas through absorption.
- **403** Each accumulator shall be protected on both gas and hydraulic fluid side by a safety device such as relief valve, fuse plug or rupture disc to prevent excess pressure if overheated. When the accumulator is an integral part of a system with such a safety device, the accumulator itself need not be supplied with a safety device.
- **404** The gas bottles for charging accumulators shall be in accordance with the Rules for Classification of Ships Pt.4 Ch.7. Such bottles shall be clearly marked to prevent mixing up with other types of gas bottles on board.
- **405** Cast accumulators shall have an internal coating.

H 500 Hydraulic equipment

- **501** System components and arrangement shall satisfy the requirements in 100 to 400.
- **502** Piping and tubing to actuators and between actuators and local accumulators shall be hydrostatically tested to 1.5 times the system design pressure for 15 minutes.

Guidance note:

This requirement may be waived on a case-by-case basis. Aspects to be considered are maximum operating pressure compared to design pressure. Experience with workmanship may also influence the decision.

$$\hbox{---e-n-d---of---} G\hbox{--u-i-d-a-n-c-e---n-o-t-e---}$$

- **503** Local accumulators used as back up power supply for essential systems shall be designed and located or protected to minimise the possibility of inadvertent isolation or mechanical damage which could prevent correct operation on demand.
- **504** Piping, tubing and components in systems required to operate in a fire scenario shall have adequate fire resistance properties to ensure correct system operation. This is particularly important for systems where hydraulic energy is required to activate or maintain control over the system. Fire test certificates for such system components may be requested.
- **505** Piping and tubing shall be flushed and cleaned before being connected to control systems.
- 506 Hydraulic oil return lines shall be designed with capacity to allow the maximum return flow during extreme conditions without reducing overall system performance. Care shall be taken to avoid the possibility of blockages at filters, vents or by mechanical damage or inadvertent operation of valves.

I. Pneumatic Power Supply

I 100 General

- 101 The redundancy requirement in A101 applies for compressors, filters and pressure reduction units when supplying power for control of main functions.
- 102 Air intakes for the compressors shall be so located as to minimise the intake of oil or water contaminated air.
- 103 Pipes between the compressors and pressure vessels shall not have connections to other machinery.
- 104 Valves on the air receivers shall be designed such that detrimental pressure shock does not arise in the pipes when the valves are opened.
- 105 Pipes from air compressors with automatic start shall be fitted with a separator or similar device to prevent condensation from draining into the compressors.
- **106** If the unit has a pneumatic auxiliary steering gear, two starting air compressors with a total capacity sufficient for normal operation of the auxiliary steering gear shall be provided.

I 200 Pneumatic equipment

- **201** Components requiring extremely clean air shall not be used. Extremely small openings in air passages shall be avoided.
- 202 Main pipes shall be inclined relative to the horizontal, and drainage shall be arranged.
- **203** Pipes and other equipment made of plastic materials are accepted if they have satisfactory mechanical strength, low thermoplasticity, high oil resistance, and flame retardency. For application see Sec.2 B500.
- **204** For air supply the redundancy requirement of A101 applies for compressors, pressure reduction units, filters and air treatment units (lubricator or oil mist injector and dehumidifier).
- 205 Air to instrumentation equipment shall be free from oil, moisture and other contamination. Condensation shall not occur at relevant pressures and temperatures. For air flowing in pipes which are located entirely inside the machinery space and accommodation, the dew point shall be more than 10°C below the ambient temperature, but need normally not be lower than 5°C. The dew point of air flowing in pipes on open deck shall be below -25°C.
- **206** Reduction valves and filters shall be duplicated when serving more than one function (e.g. more than one control loop).
- **207** Piping and tubing to actuators and between actuators and local accumulators shall be hydrostatically tested to 1.5 times the system design pressure for minimum 15 minutes.

Guidance note:

This requirement may be waived on a case-by-case basis. Aspects to be considered are maximum operating pressure compared to design pressure. Experience with workmanship may also influence the decision.

$\hbox{---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---}\\$

- 208 Local accumulators used as back up air supply for essential systems shall be designed and located or protected to minimise the possibility of inadvertent isolation or mechanical damage which could prevent correct operation on demand.
- **209** Piping and tubing shall be cleaned and dried before connected to control systems.

J. Pneumatic Starting Arrangements

J 100 General

101 For diesel engine starting systems, see also the Rules for Classification of Ships Pt.4 Ch.3. For starting up from «dead ship», see Sec.1 B313. Electrical starting systems are described in the Rules for Classification of Ships Pt.4 Ch.8. Reference is also made to DNV-OS-D201 Ch.2.

J 200 Capacity

201 Starting systems for internal combustion engines and gas turbines shall have capacity for a number of starts specified in Table J1 without reloading of air receivers.

Table J1 Capacity for number of starts	
Duty of engines	Number of starts
Engines for driving electric generators and engines for other purposes	3 starts each, total capacity need not exceed 6 starts
Engines for driving emergency generators	6 starts, automatic attempts shall be limited to 3 starts

- **202** If a starting system serves two or more of the above specified purposes, the capacity of the system shall be the sum of the capacity requirements.
- **203** For multi-engine propulsion plants the capacity of the starting air receivers shall be sufficient for 3 starts per engine. However, the total capacity shall not be less than 12 starts and need not exceed 18 starts.
- **204** Compressors shall be installed with total capacity sufficient for charging air receivers of capacities specified in 201 and 202 from atmospheric to full pressure in the course of one (1) hour.

J 300 Redundancy

- **301** Two or more compressors of total capacity as specified in 204 shall be installed. The capacity shall be approximately equally shared between the compressors. At least one of the compressors shall be independently driven.
- **302** Engines started by compressed air shall have at least two independent starting air receivers of about equal capacity.

J 400 Emergency generators

- **401** If the emergency generator is arranged for pneumatic starting, the air supply shall be from a separate air receiver.
- 402 The air receiver shall not be connected to other pneumatic systems, except for the starting system in the engine room. If such a connection is arranged, the pipeline shall be provided with a screw-down non-return valve.

K. Heating, Ventilation and Air Conditioning (HVAC)

K 100 General

- 101 The ventilation system shall be designed to maintain acceptable working and living environment for the personnel and non-detrimental conditions for equipment and machinery.
- 102 There shall be independent ventilation systems for hazardous and non-hazardous areas.
- 103 Non-hazardous enclosed spaces shall be ventilated with over pressure in relation to hazardous areas.

K 200 Accommodation and control stations

201 The HVAC system with air intakes should be so located and constructed such that fire hazardous, noxious gases, exhaust, dust, etc. are prevented from entering into the living

quarters.

K 300 Ventilation of machinery spaces

301 The capacity of the ventilation plant should be such as to provide comfortable working condition in the engine room, to supply the necessary combustion air to the diesel engines, boilers, and to prevent heat-sensitive apparatus from overheating.

302 In order to meet these requirements, the air should be distributed to all parts of the engine room, so that pockets of stagnant hot air are avoided. Special considerations should be given to areas with large heat emission and to all normal working areas, where reasonably fresh and clean outdoor air should be provided through adjustable inlet devices.

Guidance note:

For units with unrestricted location, the temperature rise from air intake to air passing from the engine room up to the casing should be maximum 10°C for an outside air temperature of maximum +35°C.

303 Approximately 50% of the ventilation air should be delivered at the level of the top of the diesel engines, close to the turbo-charger inlets, care being taken to ensure that no sea water can be drawn into the air inlets.

304 The required air flow for combustion and evacuation of heat emission shall be calculated according to ISO 8861 or an other recognised maritime standard.

305 Both the supply and exhaust fans shall be arranged with redundancy according to A101.

306 The air exhaust fans shall be designed to maintain a slight positive pressure in the engine room. This should normally not exceed 50 Pa.

307 The purifier room should have a separate exhaust fan discharging to open air remote from any air inlet.

K 400 Ventilation of gas hazardous areas

401 For requirements to ventilation in relation to hazardous areas, see DNV-OS-A101.

Guidance note:

Twelve and six air changes per hour for 95% of the time are normally considered to be adequate mechanical or natural ventilation for hazardous and non-hazardous enclosed spaces, respectively. Prevention of stagnant air pockets is also important when defining the air change rate.

402 Air inlet ducts designed for constant relative under-pressure shall be rigidly constructed to avoid air leaks.

K 500 Fans serving hazardous spaces

501 Fans shall be designed with the least possible risk for spark generation.

Guidance note:

Recommended radial air gap between the impeller and the casing should not be less than 0.1 times the diameter of the impeller shaft in way of the bearing, but not less than 2 mm. It need not be more than 13 mm.

502 The parts of the rotating body and of the casing shall be made of materials which are recognised as being spark proof, and they are to have anti-static properties.

Furthermore, the installation of the ventilation units shall be such as to ensure the safe bonding to the hull of the units themselves

The following combinations of materials and clearances used in way of the impeller and duct are considered to be non-sparking:

- Impellers and/or housing of non-metallic material, due regard being paid to the elimination of static electricity.
- b) Impellers and housings of non-ferrous metals.
- c) Impellers of aluminium alloys or magnesium alloys and a ferrous (including austenitic stainless steel) housing on which a ring of suitable thickness of non-ferrous materials is fitted in way of the impeller, due regard being paid to static electricity and corrosion between ring and housing.
- d) Impellers and housing of austenitic stainless steel.
- e) Any combination of ferrous (including austenitic stainless steel) impellers and housing with not less than 13 mm tip design clearance.

503 Any combination of an aluminium or magnesium alloy fixed or rotating component, and a ferrous fixed or rotating component, regardless of tip clearance, is considered a spark hazard and shall not be used in these places.

K 600 Ductwork

601 The ductwork shall be constructed according to recognised maritime standard or ISO 1461, SMACNA, EN 12238, EN 12239, ENV 12097, etc.

602 The ventilation ducts shall be of non-combustible materials and comply with SOLAS Reg. II-2/16 with respect to fire integrity.

K 700 Refrigeration plant

701 Refrigeration plants with a total prime mover rated effect of 7.5 kW and above, shall comply with safety requirements as given in the Rules for Classification of Ships Pt.5 Ch.10.

702 All fixed refrigeration plants shall comply with the environmental requirements of the Rules for Classification of Ships Pt.5 Ch.10 Sec.3 A403 and B304.

L. Use of Gas and Crude Oil for Auxiliary Boilers and Turbines

L 100 General

101 This section covers use of gas and crude oil in an enclosed space. Gas fuelled turbines located on topsides deck should follow the principles given in DNV-OS-E201.

L 200 Arrangement of engine room

201 Ventilation of engine and boiler room shall be carried out at a pressure which is above atmospheric pressure. The ventilation system shall be independent of all other ventilation. The number of the pressure fans for common engine or boiler room shall be such that the capacity is not reduced by more than 50%, if one fan is out of operation.

The ventilation system is to ensure a good air circulation in all spaces, and in particular ensure that there is no possibility of formation of gas pockets in the room.

202 Gas turbines and gas handling machinery (e.g. compressors) are normally to be enclosed in an enclosure with minimum A-0 fire rating.

203 Inside the enclosure, adequate ventilation is always to be present. From initiation of the start sequence of the turbine, until the turbine casing and exhaust duct are at a temperature below the lowest of:

- 80% of the fuel auto ignition temperature
- or 200°C.

204 Within the enclosure a continuous dilution ventilation shall be provided. The ventilation rate shall be adequate to

maintain a fuel and air mixture below 20% lower explosion limit LEL (90 air changes per hour is normally considered adequate). Refer to DNV-OS-A101 Sec.4 D500 for reliability of ventilation air supply (redundancy of fans and power supply).

205 A quick acting block valve shall be fitted on all fuel supply lines. The valve shall be located outside the main enclosure for the turbine or boiler, i.e. outside the engine room if installed inside the hull. (The valve can be incorporated in the block and bleed arrangement described in 300.)

206 As far as practicable, turbines and fuel lines shall be located or shielded so that fragments from damaged rotating elements (e.g. discs) will not cause ruptures or critical damage to essential equipment or facilities.

L 300 Supply lines for gas and crude oil

301 Gas and crude oil supply lines are not to pass through the accommodation or control station spaces. Supply lines may pass through or extend into other spaces if the lines are enclosed in a double pipe or duct, see Fig.1 and Fig.2.

302 Gas supply lines passing through enclosed spaces shall be completely enclosed by a double pipe or duct. This double pipe or duct is to fulfil one of the following:

- a) The gas piping shall be a double wall piping system with the gas fuel contained in the inner pipe. The space between the concentric pipes shall be pressurised with inert gas at a pressure greater than the gas fuel pressure. Suitable alarms shall be provided to indicate a loss of inert gas pressure between the pipes.
- b) The gas fuel piping shall be installed within a ventilated pipe or duct. The air space between the gas fuel piping and the wall of the outer pipe or duct shall be equipped with mechanical under pressure ventilation having a capacity of at least 30 air changes per hour. This ventilation capacity can be reduced to 10 air changes per hour provided automatic filling of the duct with nitrogen upon detection of gas is arranged for. The fan motors shall be placed outside the ventilated pipe or duct. The ventilation outlet shall be covered by a protection screen and placed in a position where no flammable gas-air mixture may be ignited.

303 For high-pressure piping the design pressure of the ducting shall be taken as the higher of the following:

- the maximum built up pressure: static pressure in way of the rupture resulting from the gas flowing in the annular space
- local instantaneous peak pressure in way of the rupture (p*): this pressure shall be taken as the critical pressure and is given by the following expression:

$$p^* = p_0 \cdot \left(\frac{2}{k+1}\right)^{\frac{k}{k-1}}$$

specific volume specific heat

 p_0 = maximum working pressure of the inner pipe $k = C_p/C_v$ constant pressure specific heat divided by the

 $k = 1.31 \text{ for } CH_4$

straight pipes.

The tangential membrane stress of a straight pipe is not to exceed the tensile strength divided by $1.5 \, (R_m/1.5)$ when subjected to the above pressure. The pressure ratings of all other piping components are to reflect the same level of strength as

As an alternative to using the peak pressure from the above formula, the peak pressure found from representative tests can be used.

304 For low pressure piping the duct shall be dimensioned

for a design pressure not less than that of the gas pipes. The duct is also to be pressure tested to show that it can withstand the expected maximum pressure at gas pipe rupture.

305 The ventilated pipe or duct shall terminate at a ventilated hood or casing arranged to cover the areas occupied by flanges, valves etc. and the piping at the gas or crude oil control unit. The hood or casing shall be installed or mounted to permit ventilation air to sweep across the control unit and be exhausted at the top of the hood or casing. The duct and hood shall be fitted with gas-tight inspection openings in way of connections of pipes

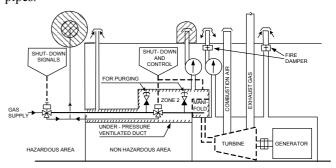


Figure 1 Example of gas supply to gas turbine

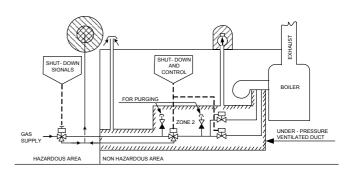


Figure 2
Example of gas supply to boiler

- 306 There shall be an interlock between gas supply and ventilation, such that the ventilation between outer and inner walls will always be in operation when there is gas in the supply line. In or immediately inside the duct outlet, continuous gas detection shall be provided.
- **307** A separate and independent supply line shall be arranged for each combustion engine and gas turbine.
- **308** The minimum nominal wall thickness of the pipes for gas and crude oil in non-hazardous areas shall be designed for a pressure of at least 50% higher than normal working pressure but not to be less than A.S.A. pipe schedule 40.
- **309** Full penetration butt welded joints are normally to be used for enclosed crude oil and gas pipes in non-hazardous areas. Detachable pipe connections shall be limited to those which are necessary for the installation purpose only.
- **310** Exposed (i.e. not enclosed in a gas tight pipe or duct) crude oil and gas pipes may be accepted in non-hazardous areas after special consideration in each case, provided compliance with the following minimum criteria:
- a) 100% non-destructive testing of welded connections shall be carried out.
- b) Strength of pipes (wall thickness with respect to diameter) and the arrangement (support etc.) are such that the piping is able to withstand the maximum possible combined load from internal and external forces it may be exposed to.

- c) Clearly identifiable colour code shall be used for the pipes.
- d) Alarm for detected gas in machinery room with maximum concentration of 20% of (LEL).
- e) No flanges are fitted in the non-hazardous area
- **311** The following fault conditions shall release alarm and automatic shut-down of gas and crude oil supply:
- a) Detected gas of maximum 20% of the LEL in the ventilated duct. For crude oil fired units, detection of liquid at all low points in the ventilated duct may be accepted as an alternative.
- b) Detected gas of maximum 20% of the LEL in engine and boiler room. This requirement may be dispensed with if the ducting has no opening (e.g. hood) into the machinery space.
- c) Loss of ventilation in the duct.
- d) Abnormal pressure variation in the fuel supply line.
- e) Detected fire in the engine and boiler room.

L 400 Arrangement of gas supply for boilers and turbines

- **401** The gas may be taken directly from the oil production facilities. The complete system for treatment of gas including pressure vessels, compressors, separators, filters, pressure control valves etc., shall be located in hazardous area and separated from the engine and boiler room by gas-tight bulkheads.
- 402 A double block and bleed arrangement shall be fitted on the gas supply line, see Fig.1 and Fig.2. The system shall shut off the gas supply and vent the gas piping inside the engine room and enclosures to a safe location (see area classification code for classification of discharge point). Single block and bleed isolation may be accepted for short supply lines, if this is in compliance with the owners isolation strategy.
- 403 The «block and bleed» valves shall be arranged for both automatic and manual operation, and shall be interlocked. Venting of the gas supply lines shall take place when gas is detected in the duct and when the unit is shut down. The manual operation shall be carried out from the boiler or turbine control panel and from a location outside the engine room.
- **404** Measures for gas-freeing of the complete piping system shall be provided.

Warning and notice plate shall be provided, which clearly indicates that gas-freeing is not to take place through a recently extinguished combustion chamber.

405 The switch-over from gas operation to oil operation, or vice versa, must be possible during normal running condition.

L 500 Arrangement of crude oil supply for boilers

- **501** Crude oil may be taken directly from the crude oil storage tanks or from other suitable tanks. These tanks shall be separated from non-hazardous areas by means of cofferdams with gas-tight bulkheads.
- 502 The complete system for treatment of crude oil or slop, i.e. pumps, strainers, separators and heaters, if any, shall be fitted in hazardous area, and separated from engine and boiler room by gas-tight bulkheads. When crude oil is heated by steam or hot water, the outlet of the heating coils shall normally be led to a separate observation tank located together

with above mentioned components. This closed tank shall be fitted with a venting pipe led to the atmosphere in a safe position and with the outlet fitted with a suitable flame proof wire gauze of corrosion resistant material which shall be easily removable for cleaning.

- **503** Electrical motors for pumps, separators, etc., shall be fitted in non-hazardous area. Where drive shafts pass through pump room bulkhead or deck plating, gas-tight glands shall be fitted. The glands shall be efficiently lubricated from outside the pump room.
- 504 The crude oil piping shall, as far as practicable, be fitted with a slope rising towards the boiler so that the oil naturally returns towards the pump room in the case of leakage or failure in delivery pressure.
- 505 In way of the bulkhead to which the duct is connected, delivery and return oil pipes shall be fitted on the pump room side, with shut-off valves remotely controlled from a position near the boiler fronts or from the machinery control room.
- 506 When using fuel oil for delivery to and return from boiler fuel oil burning units, the fuel oil delivery to and return from burners shall be effected by means of a suitable mechanical interlocking, so that running on fuel oil automatically excludes running on crude oil or vice versa.
- **507** A quick closing master valve shall be fitted on the oil supply to each boiler manifold.

L 600 Construction of boilers and burners

- **601** The boilers shall be so constructed that there is no danger that gas pockets are formed in any place in the firing and flue gas part of the boiler.
- **602** Each boiler shall have a separate flue gas line led up to the top of the funnel.
- 603 The burners for crude oil and gas shall be of such construction that they effectively maintain complete and stable combustion during all operating conditions.
- 604 The monitoring device for detecting flame failure shall be of the design «fail to shut-down of fuel supply».
- 605 Boilers for crude oil shall be fitted with a tray or gutterway of suitable height, and be placed in such a way as to collect any possible oil leakage from burners, valves and connections.

The tray or gutterway shall be fitted with a draining pipe discharging into a separate tank. This tank shall be fitted with a venting pipe led to the open in a safe position and with the outlet fitted with wire gauze made of corrosion resistant material easily dismountable for cleaning.

The draining shall be fitted with an arrangement to prevent the return of gas to the boiler or engine room.

606 Crude oil pumps shall be arranged for remote stop from the machinery control room and from near the boiler front.

L 700 Gas operated combustion engines

- **701** Construction and installation of gas operated engines shall be specially considered in each case. Technical requirements to such installations shall be based on applicable parts of the Rules for Classification of Ships Pt.5 Ch.5 Sec.16 and Pt.6 Ch.13.
- **702** The requirements for gas supply shall in general be as required in 200 and 300.

SECTION 5 MACHINERY AND MECHANICAL EQUIPMENT

A. General

A 100 Principles

101 Requirements in this section are applicable to machinery and equipment primarily related to the following:

- power generation
- propulsion
- steering
- drainage and bilge pumping
- ballasting
- stored product handling
- anchoring and mooring
- gravity tanks and pressurevessels and associated piping systems for:
 - toxic fluids
 - fluids with flash point below 100°C
 - fluids with temperature above 220°C
 - boilers and steam piping systems
 - compressed gases where pV \geq 150 kNm
 - $p = design pressure in kN/m^2$
 - V =pressure vessel volume in m^3
- firing and combustion installations.

102 Machinery and equipment shall be designed, fabricated and tested in accordance with the requirements given in this section and recognised codes and standards.

B. Recognised Codes and Standards

B 100 Unfired pressure vessels

101 Recognised codes for unfired pressure vessels are listed in Table B1.

Table B1 Recognised codes for unfired pressure vessels	
Code	Title
ASME section VIII	Boilers and Pressure Vessels Code
BS 5500	Unfired Fusion Welded Pressure Vessels
Rules for Classification of Ships Pt.4 Ch.7	Boilers, pressure vessels, thermal-oil installations and incinerators

B 200 Boilers

201 Recognised codes for boilers are given in Table B2.

Table B2 Recognised codes for boilers	
Code	Title
API Std 530	Calculation of Heater Tube Thickness in Petroleum Refineries
ASME section I	Power Boilers
ASME section IV	Heating Boilers
BS 1113	Water Tube steam Generating Plant
BS 2790	Shell Boilers of Welded Construction

Table B2 Recognised codes for boilers (Continued)	
Code	Title
NFPA 8502	Standard for the Prevention of Furnace Explosions/Implosions in Multiple Burner Boilers
BS 5500	Unfired Fusion Welded Pressure Vessels
Rules for Classification of Ships Pt.4 Ch.7	Boilers, pressure vessels, thermal-oil installations and incinerators
ISO/R 831	Rules for construction of stationary boilers
TBK-1-2	General Rules for Pressure Vessels

B 300 Atmospheric vessels

301 Recognised codes for atmospheric vessels are given in Table B3.

Table B3 Recognised codes for atmospheric vessels	
Code	Title
API Spec 12 F	Shop Welded Tanks for Storage of Production Liquids.
API Std 650	Welded Steel Tanks for Oil Storage.
BS 2654	Vertical steel welded storage tanks
DIN 4119	Tank installation of metallic materials

B 400 Heat exchangers

401 Recognised codes for heat exchangers are given in Table B4.

Table B4 Recognised codes for heat exchangers	
Code	Title
API Std 661	Air Cooled Heat Exchanger for General Refinery Services
Rules for Classification of Ships Pt.4 Ch.7	Boilers, pressure vessels, thermal-oil instal- lations and incinerators
TEMA R	Heat Exchanger Tubing

B 500 Pumps

501 Recognised codes for pumps are given in Table B5.

Table B5 Recognised codes for pumps	
Code	Title
ANSI 73.1/2	Centrifugal Pumps
API Std 610	Centrifugal Pumps for Petroleum, Heavy Duty Chemical and Gas Industry Services
API Std 674	Positive Displacement Pumps - Reciprocating
API Std 675	Positive Displacement Pumps - Controlled Volume
API Std 676	Positive Displacement Pumps - Rotary
Rules for Classification of Ships Pt.4 Ch.1	Machinery System, General

B 600 Compressors

601 Recognised codes for compressors are given in Table B6.

Table B6 Recognised codes for compressors	
Code	Title
API Std 617	Centrifugal Compressors for Petroleum, Chemical and Gas Industry Services.
API Std 618	Reciprocating Compressors for Petroleum, Chemical and Gas Industry Services
API Std 619	Rotary Type Positive Displacement Compressors for Petroleum, Chemical, and Gas Industry Services
API Std 672	Packaged, Integrally Geared Centrifugal Air Compressors for Petroleum, Chemical, and Gas Industry Services
Rules for Classification of Ships Pt.4 Ch.5	Rotating Machinery, Driven Units
ISO 13707	Reciprocating compressors

B 700 Combustion engines

701 Recognised codes for combustion engines are given in Table B7.

Table B7 Recognised codes for combustion engines	
Codes	Title
ISO 3046/1	Reciprocating Internal Combustion Engines
NFPA No 37	Stationary Combustion Engines and Gas Turbines
Rules for Classification of Ships Pt.4 Ch.3	Rotating Machinery, Drivers
EEMUA publication 107	Recommendations for the protection of diesel engines for use in zone 2 hazardous areas

B 800 Gas turbines

801 Recognised codes for gas turbines are given in Table B8.

Table B8 Recognised codes for gas turbines	
Codes	Title
API Std 616	Gas Turbines for Petroleum, Chemical, and Gas Industry Services
ANSI B133.4	Gas Turbine Control and Protection Systems
ISO 2314	Gas Turbine Acceptance Tests
ASME PTC 22	Gas Turbine Power Plants
NFPA No 371975	Stationary Combustion Engines and Gas Turbines.
Rules for Classification of Ships Pt.4 Ch.3	Rotating Machinery, Drivers

B 900 Shafting

901 Recognised codes for shafting are given in Table B9.

Table B9 Recognised codes for shafting	
Codes	Title
Rules for Classification of Ships Pt.4 Ch.4	Rotating Machinery, Power Transmissions

B 1000 Gears

1001 Recognised codes for gears are given in Table B10.

Table B10 Recognised codes for gears	
Codes	Title
AGMA 218/219	Gear Rating
API Std 631	Special Purpose Gear Units for Refinery Service
DNV Classification Note 41.2	Calculation of gear rating for marine transmissions
Rules for Classification of Ships Pt.4 Ch.4	Rotating Machinery, Power Transmissions
ISO 6336 Pt. 1-5	Gears

B 1100 Couplings

1101 Recognised codes for couplings are given in Table B11.

Table B11 Recognised codes for couplings		
Codes	Title	
Rules for Classification of Shipss Pt.4 Ch.4	Rotating Machinery, Power Transmission	
API Std 671	Special Purpose Couplings for Petroleum, Chemical, and Gas Industry Services.	

B 1200 Lubrication and sealing

1201 Recognised codes for lubrication and sealing are given in Table B12.

Table B12 Recognised codes for lubrication and sealing	
Code	Title
API Std 614	Lubrication, Shaft-Sealing and Control-Oil Systems and Auxiliaries for Petroleum, Chemical, and Gas Industry Services

C. General Marine Equipment

C 100 General

101 For machinery and equipment with similar application as for ships the technical requirements as given in the Rules for Classification of Ships may be used as listed.

Guidance note:

In general where reference is made to the Rules for Classification of Ships, this may be substituted with internationally recognised codes and standards where such are relevant for the application.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

C 200 Propulsion and auxiliary machinery

201 For requirements for the following equipment:

- diesel engines
- steam turbines
- gas turbines
- gear transmissions
- shafting
- propellers
- thrusters (for ship-shaped units)
- turbochargers
- compressors.

see the Rules for Classification of Ships Pt.4 Ch.2, Ch.3, Ch.4 and Ch.5 and the recognised codes listed in B.

202 Combustion equipment and combustion engines shall normally not be located in hazardous areas. Where it is neces-

sary to house combustion engines in a hazardous area, either the equipment shall be placed in a pressurised space or the equipment shall be otherwise protected to prevent ignition.

Guidance note:

Reference may be made to recognised standards such as EEMUA publication 107 for protection of diesel engines for use in Zone 2 hazardous area.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

- 203 Pressurisation of a space will be accepted to make it non-hazardous, provided the following minimum requirements are complied with:
- pressurisation air is taken from a safe area
- an alarm system is fitted to indicate loss of air pressure
- an air-lock system with self-closing doors is fitted
- exhaust outlet is located in a non-hazardous area
- combustion air inlet is located in a non-hazardous area
- automatic shut down is arranged to prevent overspeeding in the event of ingestion of flammable gas.
- 204 Efficient spark preventing equipment shall be fitted to the exhaust from all combustion engines and equipment, except gas turbines. A means shall be provided to give warning of failure of water supply to water-cooled spark preventing equipment.
- **205** Exhaust gases shall be discharged so as not to cause any inconvenience to personnel or a dangerous situation during helicopter operations.
- **206** The temperature of piping and machinery which may be exposed to gas and crude oil shall not exceed 200°C.

C 300 Boilers, pressure vessels, thermal oil installations and incinerators

301 For requirements for the following equipment:

- boilers
- pressure vessels
- thermal oil installations
- incinerators

see the Rules for Classification of Ships, Pt.4 Ch.7 and the recognised codes listed in B.

C 400 Anchoring and mooring equipment

- **401** For requirements for anchoring and mooring equipment, see DNV-OS-E301.
- **402** For requirements for towing devices, see DNV-OS-E301.

C 500 Steering machinery

- **501** For requirements for steering machinery for shipshaped units see the Rules for Classification of Ships Pt.3 Ch 3
- **502** Steering machinery for column-stabilised units based on a rudder arrangement shall be subject to special consideration based on applicable parts of the requirements given in 501.

D. Jacking Gear Machinery

D 100 Application

- 101 The requirements in D apply to lifting machinery for self-elevating offshore units or installations of the pinion rack type. These requirements apply to the gear transmissions, pinion-rack, the brake and (if applicable) flexible mounts.
- 102 The jack house frame and the welding connection between rack and leg structure are dealt with in DNV-OS-C104.

D 200 General

201 A relevant load-time spectrum shall be specified. This shall include at least the following:

- raising of the legs
- lowering of the legs
- raising of the platform
- lowering of the platform
- exceptional use (e.g. one or more units out of service)
- pre-load holding (static)
- pre-load raising (if permitted)
- pre-load lowering
- storm holding (static)
- motor stalling torque.
- 202 All jacking machinery components shall be designed for any relevant load condition mentioned in 201. Design safety factors etc. are valid for all foreseen operating conditions. For loads that are not foreseen, but may occur, such as motor stalling torque, lower safety factors may apply.
- **203** The elements in the load-time spectrum listed in 201 (except motor stalling torque) are vertical net loads on the rack.

The following shall be included in the load spectrum:

- friction losses from leg guiding in the hull structure
- effect of variation in location of the centre of gravity of the unit or installation.

Unless otherwise documented, the guide friction may be taken as 10% of the net vertical force in normal operation. When lifting in a tilted position (due to soil penetration in pre-load) higher guide friction shall be assumed. When evaluating the stresses in the jacking machinery, the influence of friction in bearings and on gear flanks shall be considered.

- 204 Jacking machinery (including pinion-rack) shall be designed so that an overload failure occurs in open machinery prior to enclosed machinery. This means that conditions such as e.g. a motor stalling or lifting with a locked brake are to cause clearly visible deformation in easily accessible parts such as pinion or (preferably) rack before any critical failure occurs in an enclosed gearbox.
- 205 When a design is documented by means of tests in lieu of calculations, or by combinations thereof, lower safety factors than those required by calculations may be accepted. The level will be considered on the basis of the extent of the testing and the acceptance criteria for the various parts after the test. When units or parts of units are tested, normally the whole load spectrum (201) shall be applied and each load level shall be multiplied with the required safety factor. When different safety factors apply, such as for tooth root strength and flank durability, the highest (i.e. tooth root strength) shall be used for testing purposes. (Due to the elevated loads, some flank deterioration is considered acceptable in this case).
- **206** The jacking machinery shall be designed to avoid self-locking when descending. The minimum total efficiency in lifting mode is 2/3. The total efficiency shall include motor, gear transmission and pinion-rack.

D 300 Arrangement

- **301** The jacking units shall be arranged so that they can be removed individually for servicing.
- **302** The jacking units shall be supported in such a way that elastic jack-house frame deflections are not harmful to the pinion-rack mesh. The jack-house frame and leg-rack shall have dimensional tolerances that permits an involute gear mesh (i.e. contact ratio is above unity) between pinion and rack under all operating conditions.
- **303** Flexible (sandwich) rubber pads shall be protected by an oil based coating.

- **304** The motors shall be provided with a possibility for mechanical wind-up, e.g. a square free-shaft end for crank application.
- **305** An interlock shall be provided between electric motors and fixation rack system (if any), in order to prevent power supply to the motors when the fixation rack is engaged.

D 400 Gearing

- **401** Details on calculation of gearing are given in Classification Note 41.2. This contains information on calculation of tooth root strength (fractures or deformation) and flank surface durability (pitting, spalling and case crushing) and scuffing for enclosed gear units.
- **402** The following minimum safety factors apply (but due consideration shall be given to the principles given in 204):

Tooth root strength, applicable to both enclosed and open gearing:

- safety against accumulated fatigue due to all lifting and descending loads $S_F = 1.5$
- safety against static loads as storm holding or pre-load holding $S_F = 1.35$
- safety against one motor stalling $S_F = 1.2$.

Flank surface durability, applicable to enclosed gearing, except for case crushing (surface hardened gearing) which also applies to open gears:

- safety against accumulated fatigue due to all lifting and descending loads S_H = 1.0
- safety against case crushing under static loads and one motor stalling $S_{\rm H}$ = 1.0.

Scuffing, applicable to enclosed gearing:

- safety S_S = 1 except for motor stalling.
- **403** Welded gears shall be stress relieved. Welds that suffer a stress variation during the rotation shall be designed to prevent (low cycle) fatigue.

The permissible stress range in a full penetration weld with a smooth (accessible) backside is 0.5 times the yield strength of the softer material. For inaccessible backside or non-full penetration welds the permissible stress range is 0.2 times the yield strength of the softer material. The stress range shall be determined by finite element method analyses and is to consider any stress concentration.

D 500 Pinion rack

- **501** For pinions utilising a non-involute dedendum, the tooth profile shall be specified on a drawing.
- **502** The safety factors given in 402 apply for the pinions and racks, with exception of rack tooth root strength for storm holding and motor stalling where tooth deformation is acceptable
- 503 For calculation of tooth root stresses of pinion and rack, load application at the tooth tip shall be assumed. Further guidance can be found in Appendix C in Classification Note 41.2.

D 600 Gear casings and bearing structure

- **601** Welded gear casings and supporting structure around bearings shall be stress relieved.
- 602 The casings and bearing structures shall be designed to prevent deflections that may be harmful for the gearing.
- 603 The design shall enable inspections of the gearing and plain bearings. For parallel shaft gears this means inspection

openings, and for epicyclic gears openings for access with boroscope.

D 700 Shafts and connections

- **701** Connections as shrink fitting, bolted wheels, flange bolts, splines, keys, etc. shall fulfil the criteria given in Classification Note 41.2.
- 702 Shafts shall be designed to have safety against yielding that is consistent with the tooth root strength criteria in 202. Combined bending and torsion shall be considered. Stress concentration factors may be taken from relevant literature or from the Classification Note 41.2.
- **703** Special consideration shall be given to high speed shafts accumulating more than 10^4 cycles.

D 800 Bearings

- **801** Ball and roller bearings shall have a minimum L_{10a} (ISO 281) life time that is suitable with regard to the specified overhaul intervals. The influence of the lubrication oil film may be taken into account for L_{10a} , provided that the necessary conditions, in particular cleanliness, are fulfilled.
- **802** The surface pressure (on projected area) in plain bearings shall not exceed 50% of the yield strength of the bearing material when the maximum load is applied. The bearings and lubrication are also to be designed to avoid wear that could be harmful for the gear meshes.

D 900 Brakes

- **901** A shaft brake shall be provided. This is to engage automatically in the event of power failure to the jacking machinery.
- **902** The static brake friction torque shall not be less than 1.3 times the maximum torque at the brake position.

D 1000 Flexible mountings

1001 Flexible mounting of the jacking units will be specially considered.

D 1100 Control and monitoring

- 1101 The following control and monitoring arrangements are required:
- a) Remote indication and alarm if a brake is not released when power applied to the motors. The brake alarm shall be given by an independent mechanical sensor.
- Remote indication and alarm for overheating of an electric motor.
- c) A permanent remote indication of loads during jacking and retrieval shall be provided. For a lattice leg unit the load per chord is as a minimum to be presented. Alarm signal to be given when maximum load is exceeded.

D 1200 Workshop testing

1201 Spin test and contact pattern test shall be carried out according to the Rules for Classification of Ships Pt.4 Ch.4.

D 1300 Installation inspection

1301 The alignment between the pinions and rack shall be checked both longitudinally and with regard to distance between pinion centre and rack.

D 1400 Testing on board

- 1401 The jacking machinery shall be tested with the highest specified lifting and descending load. The duration shall at least reflect one operating cycle.
- 1402 The interlock (see 305) shall be tested.

E. Turret Machinery

E 100 General

- 101 Machinery important for function of the turret shall be arranged with sufficient redundancy to ensure that a single failure of any active component will not cause loss of turret function.
- **102** Design of structural items shall be in accordance with DNV-OS-C102.

E 200 Design

- **201** The design of bearings shall be in accordance with an acceptable design method or an internationally recognised code or standard.
- **202** Where design employs use of lubricating fluids, it shall be ensured that sufficient fluid is continuously available to the bearings.
- 203 Where design employs self-lubricating materials these shall be demonstrated suitable for the intended purpose for the intended service life of the bearings.
- **204** The bearing arrangement shall be designed to take account of the level of corrosion to which it is likely to be exposed.
- **205** Consideration shall be given to fatigue loads on bearing components.
- **206** Special attention shall be given to specification of alignment and installation tolerances of bearings.
- **207** Bearing surfaces shall be protected from deterioration resulting from ingress of seawater or other contaminants.

F. Thrusters

F 100 General

101 These requirements primarily apply to thrusters intended for propulsion, propulsion and steering and dynamic positioning.

For the technical requirements refer to the Rules for Classification of Ships Pt.4 Ch.5 Sec.3.

102 All thrusters on an offshore installation, including auxiliary thrusters shall be subject to function testing onboard, (see DNV Rules for Classification of Ships Pt.4 Ch.5 Sec.3 I).

Guidance note:

Auxiliary thrusters are all other types of thrusters than those listed in 101 including thrusters designed to assist in positioning of self elevating units at location.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

103 The tunnel and other parts that are welded to the hull and form the barrier against the ingress of sea water, shall always be subject to verification, also for auxiliary units. (see DNV Rules for Classification of Ships Pt.4 Ch.5 Sec.3 I).

F 200 Arrangement and layout

- **201** The installation of the thruster, including alignment, shall give satisfactory performance under all operating conditions.
- **202** A shaft sealing-box shall be installed to prevent water from gaining access to internal parts of the thruster or into the unit
- **203** The sealing arrangement is to protect steel shafts from sea water, unless materials with documented corrosion-resistant properties is used.
- 204 The arrangement of flexibly mounted side thrusters is to provide effective protection against flooding. Such thrusters

shall be placed in separate watertight compartments, unless the flexible sealing arrangement contains two separate effective sealing elements. An arrangement for indication of leakage into the space between the inner and outer sealing shall be provided

205 The arrangement shall permit inspection of such sealings without extensive dismantling.

F 300 Propulsion thrusters

- **301** When propulsion is provided by thrusters only, there shall normally be at least two separate thruster units. This does not apply to water jets.
- **302** Propulsion thrusters shall be provided with means for local control of steering gear and propeller pitch from the thruster compartment. Necessary indications of azimuth and propeller pitch positions and means for communication with the navigation bridge shall be provided.
- **303** Azimuth steering gears are to comply with the Rules for Classification of Ships Pt.4 Ch.5 with respect to arrangement, performance and other general requirements as applicable. It must be possible to lock the unit in all required positions.

F 400 Design and construction

- **401** The thruster shall be capable of withstanding the loads imposed by all possible operational modes.
- **402** Thrusters, e.g. side thrusters, may be designed for a limited lifetime. In principle, any specified load-time characteristic may form the basis for acceptance. Alternatively the load spectrum may be characterised as follows:
- a) Specified total use per year:

Category	Hours
I	≤ 50
II	50 - 100
III	≥ 500

- b) An average lifetime of 15 years may be assumed.
- c) Amount of time with high load (torque) applied within the specific total use per year :

	Torque		
	80 - 100%	60 - 80%	≤ 60%
High	25%	50%	25%
Low	10%	30%	60%

Guidance note:

High will normally apply to fixed pitch propellers.

Low will normally apply to controllable pitch propellers.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

- 403 Inspection of thruster gears shall be made possible either through proper inspection openings, or by other means (e.g. fiber optical instruments) without extensive dismantling.
- **404** Water jets for propulsion shall be provided with inspection openings (preferably transparent) enabling inspection of the impeller.

F 500 Shafting

501 Shafting shall be in accordance with the Rules for Classification of Ships Pt.4 Ch.4, as far as applicable.

F 600 Gear transmission

- **601** Gear transmission shall be in accordance with the Rules for Classification of Ships Pt.4 Ch.4, as far as applicable.
- **602** The safety factors, S_F against tooth fracture, S_H against pitting, spalling and case crushing, and S_S against scuffing

shall be at least as given in Table F1.

Table F1 Gear transmission safety factors			
Application	S_F	S_H	S_S
Propulsion thrusters and thrusters for dynamic positioning	1.55	1.20	1.50
Auxiliary thrusters	1.40	1.15	1.30
Azimuth steering gear for surfaced hardened	1.50	1.15	
Azimuth steering gear for non surfaced hardened	1.50	1.0	

F 700 Propeller

701 The propeller and propeller components shall be in accordance with the Rules for Classification of Ships Pt.3 Ch.3, as far as applicable.

F 800 Azimuth steering gear

801 Azimuth thrusters designed for reversing the thrust by turning the unit shall be able to do so at a speed of minimum 2 r.p.m.

802 Azimuth steering gears shall have a margin against self-locking, unless overload protection is provided.

F 900 Control and monitoring

901 The systems shall comply with the requirements of the Rules for Classification of Ships Pt.4 Ch.9, and DNV-OS-D202.

902 Alarms shall be provided for the following faults:

- stop of prime mover
- power failure of remote control system
- power failure of alarm system
- low level in lubrication oil tank (if provided)
- low lubrication oil pressure (if forced lubrication oil system)
- low level in hydraulic supply tank
- low pressure in hydraulic system
- high level in bilge well.

The following additional alarms shall be provided for propulsion thruster azimuth gear power units:

- power failure
- phase failure
- motor overload
- high lubrication oil inlet temperature.

903 It shall be possible to stop the propeller from the bridge by means of a system independent of the remote control system.

G. Windlasses, Winches and Chain Stoppers for Temporary and Limited Use

G 100 General

101 Requirements in this section are applicable for winches that are normally rarely used, typically tow-in winches for risers or anchor winches for position mooring of permanent FPSO's and other permanent installations. Winches that are certified according to this standard are not to be used for lifting. Requirements in this section are derived from DNV Standard for Certification No. 2.22 Lifting Appliances and DNV-OS-E301 Position Mooring.

102 The windlass or winch shall normally have:

- one cable lifter or drum for each anchor/riser
- static brakes for each cable lifter or drum

hydraulic or electrical motors.

G 200 General design

201 The winch operating device shall be arranged to return automatically to the braking position when the operator releases the control.

202 Anchors/risers are normally to be operated by a specially designed windlass.

203 Windlass for anchors shall have one cable lifter for each stowed anchor. The cable lifter is normally to be connected to the driving shaft by release coupling and provided with brake. The number of pockets in the cable lifter shall not be less than 5. The pockets, including the groove width etc., shall be designed for the joining shackles with due attention to dimensional tolerances.

204 For each chain cable there is normally to be a chain stopper device. If a chain stopper is not fitted, the windlass shall be able to withstand a static pull equal to the minimum breaking strength of the chain cable, without any permanent deformation of the stressed parts and without brake slip.

205 Electrically driven windlasses shall have a torque-limiting device. Electric motors shall comply with the requirements of DNV-OS-D201.

206 Attention shall be paid to stress concentrations in keyways and other stress raisers and also to dynamic effects due to sudden starting or stopping of the prime mover or anchor chain.

207 As far as practicable and suitable for the arrangement, drums shall be designed with a length sufficient to reel up the rope in not more than 7 layers. If the number of layers exceeds 7, special consideration and approval is required. The ratio between winch drum diameter and wire diameter is normally to be in accordance with the recommendations of the wire manufacturer. However, the ratio should as a minimum satisfy the following requirement:

$$d_d / d_w \ge 16$$

 d_d = winch drum diameter d_w = nominal wire diameter.

208 When all rope is reeled on the drum, the distance between top layer of the wire rope and the outer edge of the drum flange shall be at least 1.5 times the diameter of the wire rope, except in the cases where wire rope guards are fitted to prevent over spilling of the wire.

Guidance note:

It is advised that the drums have grooves to accept the rope. Where a grooved rope drum is used the drum diameter shall be measured to the bottom of the rope groove. To avoid climbing of the rope on the grooves the fleet angle shall not exceed 4° .

209 Drums are either to be fabricated from steel plates or to be cast. Ferritic nodular cast iron with minimum elongation (A5) 14% may be accepted. By special consideration a lower elongation may be acceptable. Impact testing of ferritic nodular cast iron will be waived for this application.

210 The strength of the drums shall be calculated, with the maximum rope tension acting in the most unfavourable position. The effects of support forces, overall bending, shear, torsion as well as hoop stresses in the barrel shall be considered.

211 The drum barrel shall be designed to withstand the surface pressure acting on it due to maximum number of windings, the rope is assumed to be spooled under maximum uniform rope tension.

212 Drums are either to be fabricated from steel plates or be castings. Ferritic nodular cast iron with minimum elongation (A5) 10% may be accepted. By special consideration a lower

elongation may be acceptable. Impact testing of ferritic nodular cast iron will for this application be waived.

- 213 Drums shall be checked with respect to their overall equilibrium situation and beam action, with the maximum rope tension acting in the most unfavourable position. The effect of support forces, overall bending, shear and torsion shall be considered. The rope tension is in this case to include any amplifying coefficient and the dynamic coefficient ψ . If more unfavourable, however, the situation with forces directly dependent upon motor or brake action shall be considered.
- 214 The drum barrel shall be designed to withstand the surface pressure acting on it due to maximum number of windings, the rope is assumed to be spooled under maximum uniform rope tension. Maximum uniform rope tension means the tension due to safe working load without the amplification factors and dynamic coefficient taken into account. If the rope tension may vary, this variation shall be taken into account.
- 215 Unless comprehensive tests justify a lower value, the hoop stress in the barrel is not to be taken less than:

$$\sigma_{h} = C \cdot \frac{S}{p \cdot t_{av}}$$

 $\sigma_{\rm h}$ = hoop stress in drum barrel.

S = static rope tension under spooling

(i.e. dynamic factor for zero seastate not included, but friction, hook weight, etc. included).

P = pitch of rope grooving (= distance between ropes, centre to centre, within one layer).

 t_{av} = average wall thickness of drum barrel.

C = 1 for 1 layer.

C = 1.75 for more than 1 layer.

The calculated hoop stress σ_h is not to exceed 85% of the material yield stress.

216 The drum flanges shall be designed for outward pressure corresponding to the necessary support of the windings near the drum ends. Unless a lower pressure is justified by tests, the pressure is assumed to be linearly increasing from zero at the top layer to a maximum value of:

$$\rho_f = \frac{2t_{av}}{3D}\sigma_h$$

near the barrel surface. (The pressure p_b acting barrel surface is assumed to be three times this value). D is the outer diameter of the barrel.

- 217 If a chain stopper is not fitted, the windlass shall be able to withstand a static pull equal to the minimum breaking strength of the chain cable, without any permanent deformation of the stressed parts and without brake slip.
- 218 The chain stoppers and their attachments shall be able to withstand the minimum breaking strength of the chain cable, without any permanent deformation of the stressed parts. The chain stoppers shall be so designed that additional bending of the individual link does not occur and the links are evenly supported.

G 300 Capacity and system requirements

301 The capacity of the windlass brake shall be sufficient for safe stopping of anchor and chain cable when paying out.

- **302** For drum winches the brakes are preferably to act directly on the drum. Where a brake is arranged in front of a transmission the components in the transmission subjected to loads due to braking shall be designed to comply with the requirements to strength of the brake itself.
- **303** For windlasses or winches not fitted with stoppers the brakes when engaged, shall not be affected by failure in the normal power supply.
- **304** For preinstalled passive mooring system applicable for long term mooring, stalling capacity less than 40% of mooring line minimum breaking strength shall be considered on a case to case basis.
- **305** If a riser disconnect system is fitted then it is not possible to release the anchor lines while risers are connected to the unit. A special safety system preventing this shall be provided. Emergency release is nevertheless to be possible with risers connected after a manual cancellation of the above system.
- **306** Brakes are to exert a torque not less than 25% in excess of the maximum torque on the brake caused by the loads being regarded as static loads. The lowest expected coefficient of friction for the brake lining with due consideration of service conditions (humidity, grease, etc.) shall be applied in the design calculations of braking torque capacity, but this coefficient of friction is not to be taken higher than 0.3.
- **307** It shall be possible to carry out a controlled lowering of the wire rope/chain in case of an emergency. The lowering shall be carried out individually or in convenient groups.
- **308** It shall be possible to release the brakes or stoppers from a protected area close to the winch itself, and from a manned control room or bridge. During the emergency release it shall be possible to apply the brakes once in order to halt the lowering and thereafter releasing them again.
- **309** No single error, including operator's error, shall lead to release of more than one anchor line.
- **310** For remote operated winches an audible alarm system shall be fitted in order to warn that remote operation of the windlasses or winches shall take place.
- 311 At locations where remote operation of the windlasses or winches can be carried out, a signboard shall state that the alarm system shall be engaged prior to remote operation of the windlasses or winches.
- 312 Winches to be fitted with load indicator, emergency stop system and an audible alarm system in case of overload.

G 400 Chain stoppers

- **401** The chain stoppers may be of two different types:
- A stopper device fitted on the cable lifter or drum shaft preventing the cable lifter or drum to rotate (pawl stopper).
- A stopper preventing the anchor line to run out by direct contact between the stopper and the anchor line.

The latter type shall be of such design that the anchor line is not damaged at a load equivalent to the minimum breaking strength of the anchor line.

G 500 Strength and design load

- **501** For the structural part of windlass or winch and stopper, the strength requirements are given in the Table G1.
- **502** Chain stoppers and their supporting on offshore loading buoys (CALM) may be designed according to G203 and DNV-OS-C101 using the LRFD method.

Table G1 Design load and strength requirements for winches or windlasses

Case	Load in anchor line	Maximum equivalent stress, σ_e to be the smaller of the following values
Stopper engaged	S _{mbs}	$0.73 \sigma_{\rm b} {\rm or} 0.9 \sigma_{\rm f}$ in the stopper
Brakes engaged	0.5 S _{mbs} for each brake	0.73 $\sigma_{\rm b}$ or 0.9 $\sigma_{\rm f}$
Pulling	$0.4~\mathrm{S}_{\mathrm{mbs}}$	$0.5~\sigma_{ m b}~{ m or}~0.6~\sigma_{ m f}$

$$\sigma_{\rm e} = \sqrt{\sigma_1^2 + \sigma_2^2 - \sigma_1 \cdot \sigma_2 + 3\tau^2}$$

Where σ_1 and σ_2 are normal stresses perpendicular to each other, and τ is the shear stress in the plane of σ_1 and σ_2 .

 $\sigma_{\rm f}$ is the specified minimum upper yield stress of the material.

 $\sigma_{\rm h}$ is the specified minimum tensile strength of the material.

S_{mbs} is the minimum breaking strength of the anchor line.

G 600 Steel wire ropes with fittings and anchorages

601 For wire and rope materials and construction of steel wire ropes, see DNV Standard for Certification No. 2.22 Lifting Appliances, Ch.2 Sec.2.

602 For testing of steel wire ropes, see DNV Standard for Certification No. 2.22 Lifting Appliances, Ch.2 Sec.7.

603 Steel wire rope safety factor for running application or forming part of sling and for mast stays, pendants and similar standing applications shall be the greater of:

Not less than the greater of 3, and

$$SF = \frac{10^4}{0.885 \cdot SWL + 1910}$$
 but need not exceed 5.

 $SF = 3 \psi$

 ψ = design dynamic coefficient for the crane.

SWL = Safe Working Load (kN).

604 The minimum breaking load B of steel wire ropes or the wire end attachment shall not be less than:

$$B = SF - S$$

where S is the maximum load in the rope resulting from the effect of the working load (suspended load) and loads due to any applicable dead weights. The number of parts and friction in sheaves shall be considered.

605 For rope anchorage properly designed rope sockets or self-locking wedge sockets shall preferably be used. The wire end attachment shall be subjected to testing (ref DNV-OS-E304, Ch.2 Sec.3 C). The requirement to socketing procedure

is as outlined in DNV-OS-E304, Ch.2 Sec.5 C.

Socketing procedures are as a minimum to be according to applicable sections of ISO/TR 7596 or equivalent standards. Socketing shall be performed by personnel qualified by the manufacturer and carried out in compliance with procedures and check list worked out by the manufacturer. Such procedures should as a minimum include:

- minimum bending radius of rope during handling
- control of even distribution of individual wires at rope termination after bending
- determination of tolerances for angular and parallel offsets of rope and sockets axis
- control of angularity and parallelity of rope and socket axis before casting of resin (i.e. position of socket related to rope).

606 Where other connections are fitted, the method of splicing shall be according to recognized codes and standards

G 700 Electrical installations

701 Electrical installations are to comply with relevant and recognized codes or standards pertinent to the location of the equipment. Reference is made to DNV-OS-A101 and DNV - OS-D201. For instrumentation reference is made to DNV-OS-D202.

G 800 Plans and specifications.

801 For the electrical and instrumentation system the following shall be submitted:

- 1) Drawings and specification of:
 - a) switchboard
 - b) distribution boards
 - c) control panels.
- 2) Single line diagram of:
 - a) power distribution
 - b) lighting distribution showing full load, cable types and cross sections make-type-rating of fuse and switchgear.
- 3) Schematic diagrams of:
 - a) control system (with safety system)
 - b) starting arrangement for engines.
- 4) Arrangement drawings showing:
 - a) location of electrical equipment
 - b) cable runs.

SECTION 6 PIPE FABRICATION, WORKMANSHIP, AND TESTING

A. General

A 100 Objectives

101 The section addresses joining quality and testing requirements which are intended to avoid piping failure due to poor manufacture and installation.

A 200 Application

201 The requirements of this section shall be applied to all piping and piping items which have been designed under this standard

B. Welding

B 100 General

- 101 The welding of pipes shall be carried out by qualified welders, using recognised welding procedures and welding consumables according to ASME IX or EN 288-3 as applicable.
- 102 Oxy-acetylene welding shall not to be used for steel pipes in class I and II with outer diameter greater than 101.6 mm and/or wall thickness exceeding 10 mm.
- 103 Welding of pipes of copper and copper-nickel may be carried out by:
- gas tungsten arc welding (GTAW)
- gas metal arc welding (GMAW), for greater wall thicknesses
- other approved welding processes, subject to special consideration.
- 104 Welding of pipes of aluminium-brass shall be subject to special consideration.
- 105 Internal and external surfaces which shall be thermally cut or welded shall be clean and free from paint, oil, rust, scale, and other material that would be detrimental to either the weld or the base metal, when heat is applied.

B 200 Welded connections of steel pipes

- **201** All welded butt joints shall normally be of the full penetration type. For class I and II pipes and important class III piping (see Table B4), special provisions shall be taken to ensure a high quality of the root side.
- **202** Branches shall be welded to the main pipe by means of full penetration welds. For class I and II pipes a welding procedure test (WPQT) may be required.
- **203** Joint preparation and alignment shall be in accordance with a recognised international standard.
- **204** If the parts to be joined differ in wall thickness, the thicker wall shall be gradually tapered to that of the thinner of the butt joint with a slope not steeper than 1:4.

B 300 Pre-heating of steel pipes

- **301** Preheating of the different types of steel will be dependent upon their thickness and chemical composition as indicated in Table B1. Dryness shall be ensured using suitable preheating, if necessary.
- **302** The values in Table B1 are based on use of low hydrogen processes. Consideration should be given to using higher preheating temperatures when low hydrogen processes are not used.

Table B1 Preheating prior to welding of steel pipes		
Type of steel	Thickness of thicker part (mm)	Minimum pre- heating tem- perature (°C)
C and C/Mn steel $C + \frac{Mn}{6} \le 0.40$	≥ 20 ²⁾	50
C and C/Mn steel $C + \frac{Mn}{6} > 0.40$	≥ 20 ²⁾	100
0.3 Mo	> 13	100
1 Cr 0.5 Mo	< 13 > 13	100 150
2.25 Cr 1 Mo and 0.5Cr 0.5 Mo 0.25 V ¹⁾	< 13 > 13	150 200

- Preheating of these materials may be omitted for thickness up to 6 mm subject to acceptable results of hardness tests carried out on welding procedure qualification
- For welding in ambient temperature below 0°C, the minimum preheating temperature is required independent of the thickness unless specially considered.
- 303 Austenitic stainless steel shall not be preheated.
- **304** Where applied, the heating procedure and the temperature control shall be considered and provided as appropriate.

B 400 Heat treatment after welding of steel pipes

- **401** Where applied, the heat treatment shall be carried out in such a manner as to avoid impairment of the specified material properties.
- 402 The heat treatments shall preferably be carried out in suitable furnaces provided with temperature recording equipment. Where this is not practicable, localised heat treatments on a sufficient portion of the length in way of the welded joint, and carried out with approved procedures, may be applied. The width of the heated circumferential band shall be at least 75 mm on both sides of the weld.
- **403** For austenitic stainless steel heat treatment after welding is not normally required.
- **404** For other alloy steel grades the necessary heat treatment after welding shall be specially considered.
- **405** Stress relieving heat treatment shall be applied after welding, other than oxy-acetylene welding, as indicated in Table B3.
- **406** Heat treatment for oxy-acetylene welding shall be as indicated in Table B2, unless alternative treatment is clearly applicable.

Table B2 Full heat treatment after forming and welding		
Type of steel	Heat treatment and temperature (°C)	
C and C/Mn Steel	Normalising 880 to 940	
0.3 Mo	Normalising 900 to 940	
1 Cr 0.5 Mo	Normalising 900 to 960 Tempering 640 to 720	
2.25 Cr 1 Mo	Normalising 900 to 960 Tempering 650 to 780	
0.5 Cr 0.5 Mo 0,25V	Normalising 930 to 980 Tempering 670 to 720	

- **407** The stress relieving heat treatment shall consist of:
- heating the piping slowly and uniformly to a temperature

- within the range indicated in Table B3
- soaking at this temperature for a suitable period, in general one hour per 25 mm of thickness with minimum half an hour
- cooling slowly and uniformly in a furnace, to a temperature not exceeding 400°C; and subsequently
- cooling in still air.

408 In all cases, the heat treatment temperature shall not be higher than t_T - 20°C where t_T is the temperature of the final tempering treatment of the material.

Table B3 Stress relieving heat treatment after forming and				
welding	welding			
Type of steel	Thickness of thicker part (mm)	Stress relief heat treatment temperature ($^{\circ}$ C)		
C and C/Mn steel	$\geq 15^{(1)(3)}$	550 to 620		
0.3 Mo	≥ 15 ¹⁾	580 to 640		
1 Cr 0.5 Mo	> 8	620 to 680		
2.25 Cr 1 Mo and 0.5Cr 0.5 Mo 0.25V	any ²⁾	650 to 720		

- The minimum thickness above which post weld heat treatment shall be applied may be increased for steel with specified Charpy notch impact properties, subject to special consideration.
- Heat treatment may be omitted for pipes having thickness ≤ 8 mm, diameter ≤ 100 mm and minimum service temperature above 450°C, subject to special consideration.
- 3) For C and C-Mn steel, stress relieving heat treatment may be omitted up to 30 mm thickness subject to special consideration.

B 500 Non-destructive testing

501 Both sides of all welded piping joints shall, wherever possible, be visually examined. Non-destructive testing (NDT) is required depending on the class of pipes and type of joints. These shall be applied as in Table B4.

Table B4 Non-	Table B4 Non-destructive testing (NDT) requirements				
Piping class	Items to be inspected	Inspection method			
	Butt welded pipes with an outer diameter > 76.1 mm	100% radiographic testing (RT)			
	Butt welded pipes with an outer diameter ≤ 76.1 mm	10% radiographic testing (RT)			
Class I	Fillet welded flange connections in pipes with an outer diameter > 76.1 mm	100% magnetic particle testing (MT)			
	Fillet welded pipes with an outer diameter ≤ 76.1 mm	Random magnetic particle testing (MT)			
	Butt welded pipes with outer diameter > 101.6 mm	At least 10% ran- dom radiographic			
Class II	Fillet welded pipes with outer diameter > 101.6 mm	Random magnetic particle testing (MT)			
Class III	Fillet welds on safety critical piping with an outer diameter > 101.6 mm	Random magnetic particle testing (MT)			
Class III(oil production and or storage units only)	Butt welded safety critical piping ¹⁾ such as fire extinction, cooling water, fuel oil, crude oil, bilge, ballast etc.	5% radiographic testing ²⁾			

- Criticality should be determined based on accessibility, possibility of local repair and consequence of associated downtime.
- 2) The extent of testing may be re-evaluated based on the result of the examination
- **502** A recognised alternative ultrasonic testing (UT) procedure may upon special consideration be applied in lieu of radiographic testing when the conditions are such that a comparable level of weld quality is assured.
- **503** For non-magnetic materials, dye-penetrant testing (PT)

shall be used in lieu of magnetic particle examination.

504 Non-destructive testing shall be performed by operators certified in accordance with a recognised scheme, using suitable equipment and procedures. The radiographs shall be suitably marked to enable easy identification of the examination location on the pipe.

505 The results of radiographs shall be graded according to ISO 5817, and shall at least meet the requirements to quality level B for welds where a 100% radiographic testing is required, and to quality level C where a random testing is required.

506 The results from surface examination (e.g. MT, PT) are to satisfy the requirements of level B of ISO 5817.

507 The repair of defects revealed during non-destructive testing shall be carried out as appropriate. All such weld repairs shall be examined using the relevant testing method.

C. Brazing of Copper and Copper Alloys

C 100 General

101 Close joint brazing shall be used. The clearance between surfaces to be joined shall not be larger than necessary to ensure complete capillary distribution of the filler metal.

102 The suitability of filler metal and flux shall be considered. The filler metal is to have a melting point above 450°C.

D. Pipe Bending

D 100 General

101 The bending procedure shall be such that flattening of the pipe cross-section is as small as possible.

Guidance note:

For class I and II pipes the out-of-roundness, η should preferably not exceed 7% where η is defined by:

$$\eta = 2\frac{D_{\text{max}} - D_{\text{min}}}{D_{\text{max}} + D_{\text{min}}} \cdot 100 \quad (\%)$$

D = outer pipe diameter.

102 Pipe bends in class I and II pipes shall be free from wrinkles on the inner side of the bend.

103 Copper alloy pipes in seawater systems shall be free from wrinkles as far as possible.

104 For tolerances in wall thickness and allowance for bending, see Sec.2.

D 200 Heat treatment after bending

201 Hot forming shall normally be carried out in the temperature range 1000°C to 850°C for all material grades.

However, a temperature decrease to 750°C is allowable during the forming process. When the hot forming is carried out within this temperature range, the following requirements generally apply:

- for C, C-Mn and C-Mo steel, no subsequent stress relieving heat treatment is required
- for Cr-Mo and Cr-Mo-V steel, a subsequent stress relieving heat treatment in accordance with Table B2 is required
- for other alloy steel heat treatment after bending will be considered in each case.
- 202 When the hot forming is performed outside the above

temperature range, a subsequent new heat treatment in accordance with Table B3 is generally required for all grades.

- 203 The need for complete heat treatment (Table B3) after cold forming, when r \leq 4 D (where r is the mean bending radius and D is the outside diameter of pipe) shall be considered. At minimum, stress relieving heat treatment in accordance with Table B2 is required for all grades other than carbon-manganese steel with $R_m \leq$ 320, 360 and 410 (N/mm²).
- **204** Aluminium-brass pipes shall be stress-relief annealed at a temperature of 600 to 650°C or 350 to 400°C after cold working.
- **205** Normalising shall usually be performed in a furnace. Stress-relief may be performed locally covering the deformed zone. Method of heat-treatment and temperature control shall be according to recognised codes.
- **206** Hot forming of austenitic stainless steel shall be carried out in the temperature range 850 to 1150° C. Cold forming may be carried out when $r \ge 2.5$ D (where r is the mean bending radius and D is the outside diameter of pipe).

E. Joining of Plastic Pipes

E 100 General

- 101 Joining or bonding of plastic pipes by welding, gluing, lamination or similar method shall be undertaken by qualified personnel and in accordance with the pipe manufacturer's recommendations.
- 102 Before installation, all piping components should be visually inspected for damage that may have occurred during shipment. Pipes with burns, cracks and rupture of the laminate with complete penetration should be rejected.

E 200 Installer certification

- **201** With respect to joining or bonding of plastic pipes, all personnel shall be given theoretical and practical training followed by a written examination and a practical test.
- **202** Certificate for joining or bonding of plastic pipes shall contain the following information:
- the name of the holder
- the type of joining for which the holder is qualified
- reference to joining or installation procedure (procedure date of issue to be stated)
- date of issue and validity period for certificate, and
- pipe manufacturer's stamp and signature.
- **203** In addition to being certified, each joining or bonding operator shall make a test assembly consisting of one pipe-to-pipe joint and one pipe-to-fitting joint in accordance with joining or bonding procedure qualified according to 204 and 205.
- **204** Procedure qualification testing
- .1 Each joining or bonding operator shall make a test assembly fabricated in accordance with the joining or bonding procedure to be qualified, consisting of at least:
 - one pipe-to-pipe joint
 - one pipe-to-fitting joint.
- .2 After curing, the assembly shall be subjected to a hydrostatic test pressure at a safety factor of 4 times the nominal pressure rating (pressure class) of the piping system. The test duration shall be minimum 1 hour.
- .3 Acceptance criteria: No leakage or separation of joints.

- **205** Pipe size for procedure qualification test assembly shall be:
- a) When the largest size to be joined is ≤ 200 mm nominal outside diameter, the test assembly shall be the largest piping size to be joined.
- b) When the largest size to be joined is > 200 mm, the size of the test assembly shall be either 200 mm or 25% of the largest piping size to be joined, whichever is greater.

E 300 Installation

- **301** Jointing and installation of piping components shall be carried out according to manufacturer recommendations, such that they are stress free.
- **302** Bending of pipes to achieve changes in direction, or forcing misaligned flanges together by over-torqueing bolts shall not be performed.
- **303** The joining or bonding procedure should include:
- materials and suppliers
- tools and equipment
- environmental requirements
- joint preparation including surface treatment and cleanliness
- dimensional requirements and tolerances
- curing time and temperature
- tests and examinations with acceptance criteria.
- **304** Any change in the joining or bonding procedure which may affect the physical or mechanical properties of the joint or bond may require re-qualification of the procedure.
- **305** The pipe manufacturer should maintain a record of earlier certifications of procedures and operators.

E 400 Electrical conductivity

- **401** Piping systems in or through gas hazardous areas and/or carrying fluids capable of generating electrostatic charges shall be electrically conductive.
- **402** Where conductive piping is required, the resistance per unit length of pipe, fitting, etc. shall not exceed $10^5 \Omega/m$, and the resistance to earth from any point in the piping system is not to exceed 10^6 ohm.
- **403** Pipes and fittings should preferably be homogeneously conductive.

E 500 Quality control

- **501** The quality control shall be based on the implementation of:
- bonding procedure qualification records
- inspection of adhesive-bonded joints
- inspection register for piping joints
- inspection of finished fabricated pipework for compliance with design drawings.
- **502** Each adhesive-bonded connection shall be permanently marked for identification purposes. A log book containing the following key values relevant for the bonding process shall be maintained:
- date
- temperature and relative humidity
- identification number
- curing temperature and time
- signature of the quality inspector.

E 600 Pressure testing of plastic pipes

601 All closed GRP or GRE piping systems shall be hydrostatically pressure tested after installation. Systems which are open to atmosphere (e.g. drains) shall be subject to a hydro-

static leak test as minimum.

602 The test pressure shall be raised slowly to 1.5 times the design pressure and conducted for a minimum of one hour. There shall be no leaking or weeping of the system during the test.

F. Hydrostatic Tests of Piping

F 100 Hydrostatic testing before assembly on board

101 All class I and II pipes and integral fittings shall be subjected to a hydrostatic test after completion of manufacturer but before insulation and coating, if any. The hydrostatic test shall be at the following pressure:

$$P_{H} = 1.5 p$$

P_H = test pressure in bar p = design pressure in bar

For steel pipes and integral fittings for design temperatures above 300°C the test pressure shall be determined by the following formula but need not exceed 2 p:

$$P_{\rm H} = 1.5 \frac{\sigma_{\rm t100}}{\sigma_{\rm t}} p$$

 σ_{100} = permissible stress at 100°C.

 $\sigma_{\rm t}$ = permissible stress at the design temperature. Where necessary, the value of the test pressure may be reduced to 1.5 p in order to avoid excessive stress in way of bends, branches etc. In any case the membrane stress is not to exceed 0.9 the yield stress at the testing temperature.

102 Pressure testing of small bore pipes (less than 51 mm D) need not be undertaken where not considered appropriate with respect to the application.

103 Non-integral fittings and pressure containing components other than valves, pump housing and pressure vessels shall be tested as specified in 101.

F 200 Hydrostatic testing after assembly on board

201 The piping shall be hydrostatically tested in accordance with Table F1.

Table F1 Hydrostatic testing after assembly on board		
Piping system	Test pressure	
Fuel oil piping		
Heating coils in tanks	1.5 magging and a program	
Bilge, ballast and fire pipes	1.5 maximum working pressure, minimum 4 bar	
Steam pipes, compressed air pipes and feed pipes of class III		
Hydraulic piping	1.5 maximum working pressure. Test pressure need not exceed working pressure by more than 70 bar	
Piping systems made from non- metallic material	1.5 maximum working pressure, minimum 6 bar, minimum duration 1 hour	

202 If pipes specified in 101 shall be welded together during assembly on board, they shall be hydrostatically tested after welding. Hydraulic testing may not be required where a 100% radiographic examination and heat treatment after welding is carried out, and indicates acceptable results.

203 Separate pipe lengths which have been hydraulically tested in the workshop may be insulated before the hydrostatic test is carried out, except for connections between the pipe lengths.

G. Functional Testing

G 100 General

101 All piping systems shall be properly flushed, checked for leakage and functionally tested under working conditions.



MARINE AND MACHINERY SYSTEMS AND EQUIPMENT

CHAPTER 3

CERTIFICATION AND CLASSIFICATION

CONTE	ENTS	PAGE
Sec. 1	Certification and Classification	63

SECTION 1 CERTIFICATION AND CLASSIFICATION

A. General

A 100 General

- 101 As well as representing DNV's recommendations on safe engineering practice for general use by the offshore industry, the offshore standards also provide the technical basis for DNV classification, certification and verification services.
- 102 A complete description of principles, procedures, applicable class notations and technical basis for offshore classification is given by the DNV offshore service specifications for classification, see Table A1.

Table A1 DNV Offshore Service Specifications			
No.	Title		
DNV-OSS-101	Rules for Classification of Offshore Drilling and Support Units		
DNV-OSS-102	Rules for Classification of Floating Production, Storage and Loading Units		
DNV-OSS-309	Verification, Certification, and Classification of Gas Export and Receiving Terminals		

A 200 Certification and classification principles

201 Marine and machinery systems and equipment will be certified or classified based on the following main activities:

- design verification
- equipment certification
- survey during construction and installation, and
- survey during commissioning and start-up.

A 300 Assumptions

- **301** Any deviations, exceptions and modifications to the design codes and standards given as recognised reference codes shall be documented and approved by DNV.
- **302** Aspects of the design and construction provisions of this standard (Ch.2) which shall be specially considered, agreed upon, or may be accepted are subject to DNV approval when the standard is used for classification purposes.
- **303** DNV may accept alternative solutions found to represent an overall safety level equivalent to that stated in the requirements of this standard.

B. Documentation Requirements

B 100 General

101 Documentation requirements shall be in accordance with the NPS DocReq (DNV Nauticus Production System for documentation requirements) and DNV-RP-A201.

C. Certification of Materials and Components

C 100 General

101 Certification is a conformity assessment normally including both design and production assessment.

The production assessment includes inspection and testing during production and/or of the final product.

102 Components shall be certified consistent with their function and importance for safety. The principles of categorisation of component certification are given in the relevant

offshore service specifications, see Table A1.

C 200 Certificate types

201 DNV defines three levels of documentation depending on importance of equipment and experience gained in service as given in 202.

202 *Test report (TR)* is a document signed by the manufacturer which states :

- conformity with the rule requirements
- that testing is carried out on samples from the current production of equal products.

The manufacturer is to have a quality system that is suitable for the kind of certified product. The surveyor is to check that the most important elements of this quality system are implemented and may carry out random inspection at any time. The products shall be marked to be traceable to the test report.

Works Certificate (W) is a document signed by the manufacturer which states:

- conformity with the rule or standard requirements
- that the tests are carried out on the certified product itself
- that the tests are made on samples taken from the certified product itself
- that the tests are witnessed and signed by a qualified department.

The manufacturer is to have a quality system that is suitable for the kind of certified product. The surveyor is to check that the most important elements of this quality system are implemented and may carry out random inspections at any time. The component shall be marked to be traceable to the work certificate.

DNV Product Certificate (NV) is a document signed by a DNV surveyor which states:

- conformity with the rule requirements
- that the tests are carried out on the certified product itself
- that the tests are made on samples taken from the certified product itself
- that the tests are made in the presence of a DNV surveyor or in accordance with special agreements.

The product shall be stamped with a special NV-stamp traceable to the certificate.

Guidance note:

The terms NV Certificate, Works Certificate, and Test Report used here refer to a product certificate rather than a material certificate.

A DNV Product Certificate (NV) may be delivered with material certified to a lower level than a DNV Material Certificate (NV) or ISO 10474 Certificate Type 3.2 . The level of material certification is agreed as part of the certification process.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

C 300 Categorisation of equipment and components

301 Equipment is categorised based on safety and complexity considerations. The category of equipment will determine the scope of the certification activity and the certificate type to be issued.

302 Equipment may be categorised into two main categories, Category 1, for which a DNV Product Certificate (NV) is required or Category 2, for which manufacturer certification (W or TR) will be accepted.

- 303 Category 1 is subdivided into three subcategories depending on whether or not design review is carried out or whether an extensive fabrication survey is required. Ref Table
- 304 Category 2 is subdivided into two subcategories depending on whether the manufacturer documentation required is based on a sample of similar products or the actual product to be delivered. Ref Table C1.
- For converted installations Field Proven Equipment may be accepted. This might be categorised as Category 1 but our design review is replaced by documentation that equipment has been previously used in an equivalent application. This review will normally be followed by standard survey and document review.

Table C1 Equipment categorisation					
	Cat 1a	Cat 1b	Cat 1c	Cat 2a	Cat 2b
Scope	D2(D1) S2 R2	D2(D1) S1 R2	S1 R2	R2	R1
Certificate/ Document	NV	NV	NV	W	TR

- D1: Evaluation of field proven status
- D2: Design review
- Witness of final testing of completed product
- Survey during construction and witness of final testing of completed product
- Review of manufacturers documentation (typical for product) Review of manufacturers documentation (specific to product)

Certification requirements under DNV-OS-D101

Certification requirements for miscellaneous mechanical components are given in Table C2.

Table C2 Certification of miscellaneous machinery and mechanical components		
Item	Certification category	
Jacking machinery	1A	
Turret bearings	1A	
Boiler	1A	
Condenser	2A	
Boiler heat exchanger	1A	
Pumps for boiler	1C	
Boiler PSV	1C	
Boiler spark arrestor	2B	
Winches	1A	

- 402 Piping and piping components are to be delivered with material certification in accordance with Ch.2 Sec.2 Table B4. Where the requirement calls for witness by 3rd party (Certificate Type 3.2) this shall be carried out by DNV.
- 403 Certification requirements for pressure vessels are given

in Table C3.

Table C3 Categories for pressure containing equipment and storage vessels ¹⁾				
Property	Conditions	Category		
	Conditions	I 2)	II	
Pressure	$1 < P \le \frac{20000}{D_i + 1000}$		X	
	$P > \frac{20000}{D_i + 1000}$	X		
	Vacuum or external pressure	X		
	Steam	X		
	Toxic fluid	X		
	Thermal oil	X		
Medium	Liquids with flash point below 100 °C	X		
	Flammable fluids with T > 150 °C	X		
	Other fluids with T > 220 °C	X		
	Compressed air/gas PV ≥ 1.5	X		
Material	$\sigma_{\rm y}$ 345 MPa (50000 psi) or $\sigma_{\rm t}$ 515 MPa (75000 psi)	X		
	Where impact testing is required.	X		

- Free standing structural storage tanks will be specially considered based on stored medium, volume and height. These may be designed according to the requirements of DNV-OS-C101
- Normally category IA, however, limited class survey may be agreed upon with DNV based on manufacturer's QA/QC system, manufacturing survey arrangement (MSA) and fabrication methods.

internal design pressure in bar

inside diameter in mm D_{i}

volume in m

T design temperature =

specified yield strength σ_{v} specified ultimate tensile strength

404 Certification requirements for steering and propulsion components are given in Table C4.

propulsion systems		
Item	Certification category	
Thruster	1A	
Propeller	1A	
Steering gear	1A	
Rudder	1A	
Diesel engine	1A	
Gas turbine	1A	

- **405** For equipment in piping systems serving essential and important functions on self-propelled units equipment as listed in DNV Rules for Classification of Ships Pt.4 Ch.6 Sec.5 shall be delivered with a NV Certificate.
- For equipment on other installations, certification in accordance with Table C5 will be required for the listed equipment
- 407 Electrical equipment should be certified in accordance with DNV-OS-D201 Ch.3 Sec.1 B400.

Table C5 Certification of components in marine pi	iping systems
Item	Certification
	category
Piping system items for main engine or main power	
Fuel oil transfer pump	1C
Lube oil pump	1C
Cooling system pump unit	1C
Lube oil heat exchanger	1C
Fuel oil heat exchanger	1C
Valves	
Sea valves	1C
Valves with DN >100 mm and p>16 bar	1C
Non-standard valves	1B
Standard valves	2A
Pressure relief valves	1C
110000101101111011101	10
Compressed air systems	•
Starting air compressors	1C
Air receivers	1B
Pressure relief valves	2A
Air dryers	2A
Ballast system	
Ballast pumps	1C
Ballast control system	1A
Bilge and drain system	
Bilge control system	2A
Bilge pumps	1C
Bilge ejectors	2A
Strainers	2B
Strums and rose boxes	2B
Strums and rose boxes	2.0
Air and sounding systems	<u>l</u>
Air vent heads	1B
Tank level indicators	2A
Sounding control panel	1B
Striking plates	2B
Sounding rods	2B
Leak detection system	2B
Hydraulic control of safety critical valves etc.	
Hydraulic control panel	1B
Pumps in hydraulic control system	1C
Hydraulic power pack	2A
Accumulators (pV > 150 kNm)	1B
Accumulators (others)	2A
Tanks for hydraulic fluid	2B

D. Survey During Construction

D 100 General

- **101** Subsection D describes surveys during construction of marine and machinery systems and components.
- **102** General requirements for surveying during construction are stated in the relevant DNV offshore service specification for classification, see Table A1.

D 200 Quality assurance and quality control

- **201** The contractors shall operate a quality management system applicable to the scope of their work. The system shall be documented and contain descriptions and procedures for quality critical aspects.
- **202** Contractors who do not meet the requirement in 201 will be subject to special consideration in order to verify that products satisfy the relevant requirements.
- **203** The contractors shall maintain a traceable record of non-conformities and corrective actions and make this available to the DNV surveyor on request.

Guidance note

Contractors are encouraged to obtain ISO 9000 series quality system certification through DNV Accredited Quality System Certification services.

---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---

D 300 Materials

- **301** Welded pipes may be accepted as seamless pipes only where supplied by a DNV approved manufacturer for the production of such pipes.
- **302** Grey cast iron shall only be accepted for hydraulic piping systems after special consideration on a case by case basis.
- **303** Use of nodular cast iron for piping shall be subject to special DNV approval on a case by case basis.
- **304** Design conditions for plastic pipes containing media other than water, shall be supplied to DNV for approval.
- **305** Electrically conductive piping for use in gas hazardous areas shall be of a DNV approved specification.

D 400 Welding and welder qualification

- **401** Approval of welders shall be in accordance with DNV-OS-C401 or the applied design code.
- **402** Welders already approved to another corresponding code than the design code may be accepted if properly documented.
- 403 WPS shall be approved by DNV.
- 404 The extent of the welding procedure test shall be agreed upon with DNV before the work is started.
- **405** A welding production test (WPT) may be required by the surveyor during fabrication to verify that the produced welds are of acceptable quality.
- **406** Welding repairs shall be performed according to an repair procedure approved by DNV.
- **407** Socket welded joints and slip on sleeves shall be subject to special DNV approval on a case by case basis.
- **408** Local PWHT may be performed on simple joints when following an approved procedure. The procedure shall be approved by DNV.
- **409** The heat treatment procedure in connection with forming and/or welding shall be approved if not covered by the applied code or standard.
- **410** The heat treatment procedure in connection with pipe bending shall be approved if not covered by the applied code or standard.
- 411 Omission of heat relieving treatment for C and C-Mn steels up to 30 mm thickness shall be subject to special DNV approval.
- 412 Magnetic particle inspection (MPI) is the preferred method for detection of surface defects, however the liquid penetrant method may be used as an alternative, subject to DNV's acceptance in each case.
- 413 Piping systems shall be cleaned (e.g. by flushing, retro-

jetting, chemical cleaning etc.) to remove debris or foreign bodies prior to start-up of sensitive equipment like pumps, compressors, isolation valves etc. The procedure and acceptance criteria shall be agreed with the surveyor.

D 500 Testing

501 All class I and II pipes and integral fittings, after completion of manufacture but before insulation and coating, if any, shall be subjected to a hydrostatic test in the presence of the surveyor.

Test pressure may be reduced at the discretion of the surveyor in accordance with the principles given in Ch.2 F.

Guidance note:

Pressure testing of small bore pipes (D \leq 50 mm) may be waived at the discretion of the surveyor.

 $\hbox{---e-n-d---of---G-u-i-d-a-n-c-e---n-o-t-e---}\\$

- **502** Valves with a nominal diameter of 100 mm and a design pressure >16 bar shall be subject to a hydrostatic test in the presence of the surveyor.
- **503** For valves other than those mentioned in 402, the manufacturer's certificate for hydrostatic testing will be accepted.
- 504 Testing of pumps, which are subject to certification,

shall be subject to DNV witness and verification. Special survey arrangements may be agreed upon request.

E. Survey During Installation and Commissioning

E 100 General

101 Commissioning shall be in accordance with submitted procedures reviewed and approved by DNV in advance of the commissioning. Commissioning shall be witnessed by a surveyor and is considered complete when all systems, equipment and instrumentation are operating satisfactorily.

E 200 System and equipment checks

201 During commissioning, all items of pipework and equipment shall be checked for compliance with approved documentation and commissioning procedures.

E 300 Functional testing

301 During commissioning, the systems shall be functionally tested, as practicable in accordance with approved procedures.